

# **Semiconductor Products, Circuit Design Tools and Support**

## *Master Selection Guide*

Master  
Selection Guide

**Semiconductor Products, Circuit  
Design Tools and Support**



# **Master Selection Guide**

1988

## **Catalog of Semiconductor Products and Services**



**TEXAS  
INSTRUMENTS**

### **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes in the devices or the device specifications identified in this publication without notice. TI advises its customers to obtain the latest version of device specifications to verify, before placing orders, that the information being relied upon by the customer is current.

TI warrants performance of its semiconductor products, including SNJ and SMJ devices, to current specifications in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems such testing necessary to support this warranty. Unless mandated by government requirements, specific testing of all parameters of each device is not necessarily performed.

In the absence of written agreement to the contrary, TI assumes no liability for TI applications assistance, customer's product design, or infringement of patents or copyrights of third parties by or arising from use of semiconductor devices described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor devices might be or are used.

Copyright © 1987, Texas Instruments Incorporated

---

# CONTENTS

<b>Product Identification and Information</b>	<b>1</b>
<b>Application Specific Integrated Circuits (ASIC)</b>	<b>2</b>
<b>Digital Logic Products</b>	<b>3</b>
<b>Processors and Controllers</b>	<b>4</b>
<b>Military Products</b>	<b>5</b>
<b>Interface Circuits</b>	<b>6</b>
<b>Linear Circuits</b>	<b>7</b>
<b>Optoelectronics and Image Sensors</b>	<b>8</b>
<b>Telecommunications and Speech Products</b>	<b>9</b>
<b>Memory Products</b>	<b>10</b>
<b>General Information</b>	<b>11</b>
<b>Customer Support</b>	<b>12</b>



---

## TRADEMARKS

The trademarks mentioned in the 1988 Master Selection Guide are credited to the respective corporations listed below:

<b>TRADEMARK</b>	<b>CORPORATION</b>
Advanced LinCMOS	Texas Instruments Incorporated
CompilerCell	Texas Instruments Incorporated
Crossware	Texas Instruments Incorporated
EPIC	Texas Instruments Incorporated
IBM	International Business Machines Corporation
IMPACT	Texas Instruments Incorporated
LinCMOS	Texas Instruments Incorporated
MegaModule	Texas Instruments Incorporated
MS-DOS	Microsoft Corporation
PAL	Monolithic Memories Incorporated
PC	International Business Machines Corporation
SystemCell	Texas Instruments Incorporated
ULTRIX	Digital Equipment Corporation
UNIX	AT&T Bell Laboratories
VAX	Digital Equipment Corporation
VMS	Digital Equipment Corporation
XDS	Texas Instruments Incorporated

---

## INTRODUCTION

The purpose of this book is to facilitate identification of Texas Instruments products and services to fill customer needs. The 1988 Master Selection Guide contains both an alphanumeric (A/N) index and a functional index. To lend itself more toward “user-friendliness”, the A/N index is sorted alphabetically to group like prefixes and arranged in ascending numerical order – rather than strictly alphanumeric (by column position starting leftmost) as a computer would do. All package options are shown for clarity. Technical literature references – data sheets or data books – are also provided. The key-word functional index easily matches function to the appropriate TI part numbers.

TI’s objectives for the late 1980’s and into the 1990’s are focused on leading edge technology and products – along with quality, reliability, comprehensive product support, and innovative customer service programs. In the 1988 Master Selection Guide, designers can readily assess TI’s broad semiconductor line by referring to the table of contents organized into nine main product sections. These include the following: application specific integrated circuits (ASIC); VLSI logic and digital logic products; application specific processors and controllers; military products; interface circuits; linear circuits; optoelectronics and image sensors; telecommunications and speech products; and memory products.

Advanced DRAM-driven process technology, the basis for TI’s thrust products today, offers customers high performance ICs that are available in a broad range of packages – including surface mount technology (SMT) – to support all equipment configuration strategies.

Texas Instruments customers can be confident of the lowest cost-of-ownership, thereby keeping their overall equipment costs as low as possible. Programs such as ship-to-stock and just-in-time delivery support reduction of costly inventories.

To obtain referenced technical literature, including data sheets, data books, and application notes, complete and return the order forms incorporated in the last section of the Guide. For further convenience, a complete listing of TI field sales offices, authorized TI distributors, TI Regional Technology Centers (RTCs), and the TI Customer Response Center is included on the back page.

---

## QUALITY, RELIABILITY AND SERVICE

The goal of Texas Instruments is to offer product quality, reliability, and service unequaled in the semiconductor industry. The foundation for this approach is to consistently ship outstanding quality – which allows the elimination of costly incoming inspection through ship-to-stock programs. Ship-to-stock product quality, coupled with performance quality and 100% on-time delivery to narrow shipping windows, supports manufacturing cost reduction through just-in-time (JIT) manufacturing technology. This combination of quality, reliability, and service can be measured by a single index called “the cost-of-ownership<sup>1</sup>.” Very simply stated, the cost-of-ownership – which consists of the purchase price, inventory, quality and reliability cost adders – is the total cost to own a product over its lifetime.

In today’s highly competitive electronics industry, it is critical to know what your costs are, where they are, and whether or not you can reduce or eliminate them to improve profits without degrading either quality or reliability. The cost-of-ownership concept provides this tool and clearly shows the value of making procurement decisions based on “total costs” rather than just “purchase price.” An analysis of cost-of-ownership shows that reliability related costs are much more significant than is generally recognized. Contact your local field sales office and request the brochure “Texas Instruments Lowers Semiconductor Cost-of-Ownership, SSYB057,” if you would like more information about the concept.

**OUTSTANDING QUALITY AND DELIVERY, COUPLED WITH LEADERSHIP RELIABILITY,  
LEADS TO LOWERED COST OF OWNERSHIP FOR TI CUSTOMERS.**

<sup>1</sup>TI defines the “cost-of-ownership” as being composed of the purchase price, quality adders (for incoming inspection and board rework), inventory adders (for maintenance of a buffer inventory for suppliers who cannot meet JIT delivery), in-house reliability adders (for in-house system burn-in and system rework), and field reliability adders (for warranty and post-warranty field repairs).

# QUALITY

TI's quality goals are being achieved through significant improvement in product quality by:

- better definition of customer requirements
- greater emphasis on quality as a design criterion
- improved control of incoming materials
- intensive training of supervisors and operators
- extensive use of statistical process control
- more complete automation of operations to minimize operator related defects.

Between 1981 and first quarter 1987, electrical quality for Linear products has improved by 98% (from 4200 ppm to 76 ppm). Digital products have improved by 99% (3622 ppm to 11 ppm) and DRAMs by 98% (2786 ppm to 44 ppm). As evidenced by more than 70 major quality awards in the last three years, significant improvement in product quality has been publicly recognized by TI's customers. Included among these awards are Ford's Q-1 award, the Naval Quality Award, and the Deming Prize – Japan's most prestigious quality award.

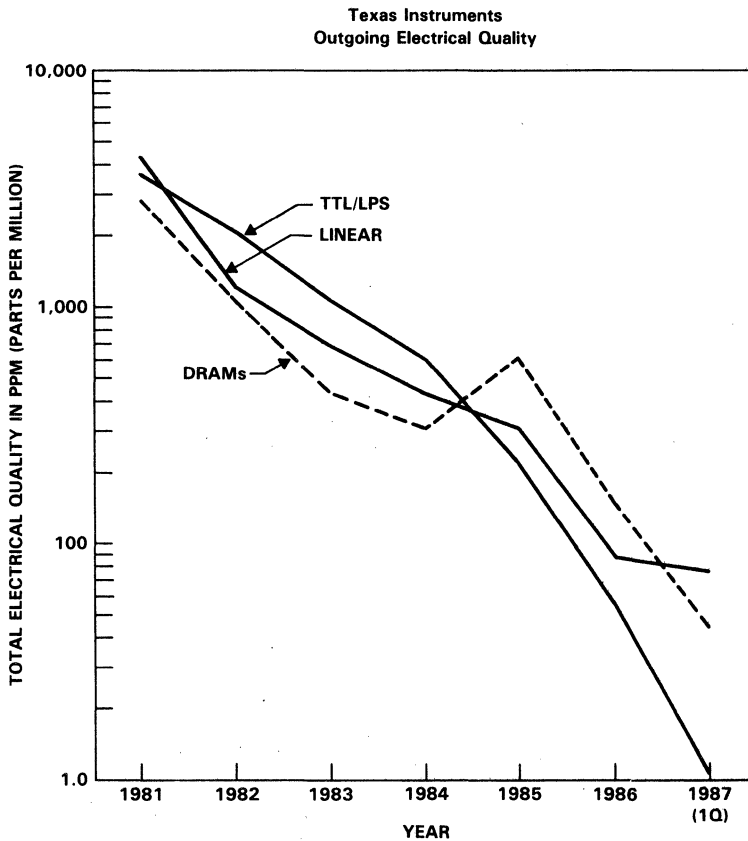



Figure 1

# RELIABILITY

Recognizing the critical importance of low IC failure rates in system performance, TI continues in its goal to drive IC failure rates down through use of the following:

- rigid circuit design rules
- computer-aided-design (CAD) programs
- computer-aid programs to verify proper implementation of circuit design rules
- emphasis on statistical process control
- stringent qualification testing prior to product release
- routine reliability monitoring of released products
- extensive failure mode tracking/feedback system for IC failures.

Since the early 1980's, DRAMs, Linear ICs, and Bipolar Digital ICs have all exhibited a device failure rate improvement trend which approximately halves the failure rate every two years. However, since device complexity has also increased during this time period, the failure rate by function has improved (lowered) at an even faster pace. For example, the 1982 DRAM failure rate of 257 FITs<sup>2</sup> was on 64K DRAMs while the 1986 failure rate of 29 FITs is on 256K DRAMs. The 1986 failure rate estimate for Linear is 5 FITs, and for Bipolar Digital<sup>3</sup> is below 0.5 FITs. TI continues to emphasize reliability improvement as a major factor in reducing the total cost-of-ownership for its customers.

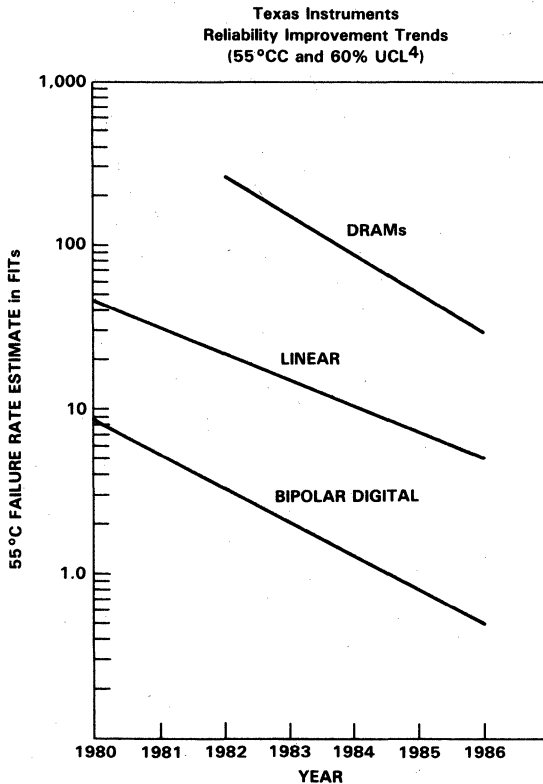

**Figure 2**

<sup>2</sup>One FIT is one failure per billion unit-hours

<sup>3</sup>Includes the following families: ACL, AS, ALS, 74F, LPS, STTL, TTL, PALs, and PROMs

<sup>4</sup>Upper Confidence Limit

---

## SERVICE

Outstanding service is a key factor in achieving the lowest cost-of-ownership for TI customers. TI's efforts to provide outstanding service are focused on specific actions, programs, and systems which directly benefit its customers in the areas of delivery, responsiveness, ship-to-stock programs, and electronic data interchange, as delineated below.

- Delivery – to execute deliveries on committed dates with controlled transit times to assure customer receipt of product shipments in support of customer JIT programs.
- Responsiveness – to effect the timely response to special customer needs and situations, as exemplified by:
  - 1) short cycle times for:
    - print evaluations
    - disposition of returned material
    - analysis of failed devices
    - establishing test correlation
  - 2) timely technical assistance.
- Ship-to-stock Programs – to eliminate or at least minimize customer incoming product inspection.
- Electronic Data Interchange (EDI) – to provide a system approach for direct order entry and data exchange.

TI has also installed a fully integrated computer operating system to:

- provide automatic check of print and revision level approvals at time of order entry
- schedule capacity and material starts
- track orders through fabrication, test, and shipping.

TI's goals for service include: 100% on-time delivery, short lead times, reduction of customer inventory levels, and quick response to special customer needs and situations.



---

# PRODUCT IDENTIFICATION AND INFORMATION

## INTRODUCTION

This section provides the means of identifying TI semiconductor products and circuit design tools and support services. It includes an alphanumeric (A/N) index, sorted alphabetically to group like prefixes, and arranged in ascending numerical order, and a key-word functional index that matches functions to the appropriate TI part numbers. Both indexes are divided into two major segments — Application Specific Integrated Circuits (ASIC) and Catalog Products.

<b>Contents</b>	<b>Page</b>
Alphanumeric Indexes .....	1-2
Application Specific Integrated Circuits (ASIC) Alphanumeric Index .....	1-2
Using the Alphanumeric Index .....	1-2
1- $\mu$ m TGC100 Series CMOS Gate Arrays .....	1-4
1- $\mu$ m TSC500 Series CMOS Standard Cells .....	1-7
2- $\mu$ m SystemCell™ Series CMOS Standard Cells .....	1-13
Catalog Products Alphanumeric Index .....	1-19
Using the Alphanumeric Index .....	1-19
Section and Page Locator .....	1-19
TI Reference Document .....	1-19
Catalog Products .....	1-20
Functional Indexes .....	1-126
Application Specific Integrated Circuits (ASIC) Functional Index .....	1-126
Using the Functional Index .....	1-126
1- $\mu$ m TGC100 Series CMOS Gate Arrays .....	1-128
1- $\mu$ m TSC500 Series CMOS Standard Cells .....	1-133
2- $\mu$ m SystemCell™ Series CMOS Standard Cells .....	1-142
Catalog Products Functional Index .....	1-151
Using the Functional Index .....	1-151
Catalog Products .....	1-152



---

# ALPHANUMERIC INDEXES

## Application Specific Integrated Circuits (ASIC) Alphanumeric Index

1

Product Identification and Information

### USING THE ALPHANUMERIC INDEX

The ASIC Alphanumeric Index begins with an explanation of TI's ASIC naming convention and an index of logic function prefixes. It is grouped into three categories:

- 1- $\mu$ m TGC100 Series CMOS Gate Arrays
- 1- $\mu$ m TSC500 Series CMOS Standard Cells
- 2- $\mu$ m SystemCell Series CMOS Standard Cells

It lists and describes macros and cells within these categories as shown in the following example:

#### TSC500 SERIES 1- $\mu$ m CMOS STANDARD CELLS

Cell Number	Description
AN510LJ	5-Input AND Gate
BU130LJ	Delay Buffer, 3X Drive
DE210LJ	2-Line to 4-Line Decoder
EN210LJ	2-Input Exclusive-NOR-Gate
EX210LJ	2-Input Exclusive-OR-Gate

The TI reference document, containing the most current technical data, is cited at the beginning of each category.

The naming convention for TI's gate array and standard cell functions is shown in Figure 1. An index of logic function prefixes is listed in Table 1.

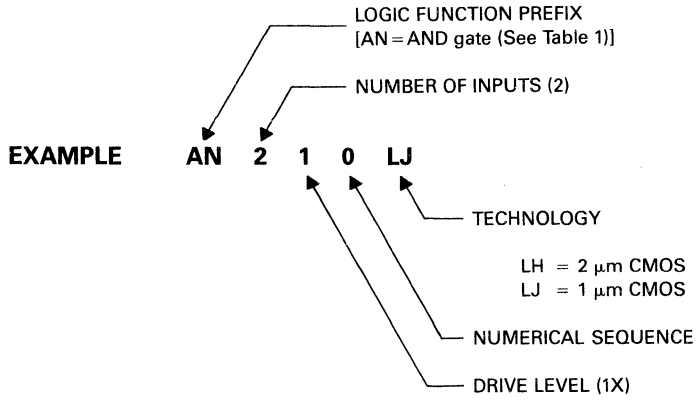


Figure 1. ASIC Naming Convention

Table 1. Index to Function Prefixes

PREFIX	DESCRIPTION	PREFIX	DESCRIPTION
AN	AND Gates	M	Microprocessor Bit-Slice Elements
AD	AND-OR Gates	MU	Multiplexers
BF	Multi-stage AND,NAND,NOR,OR Gates	MV	Multivibrator (One-Shot)
BU	Buffers	NA	NAND Gates
CO	Comparators	NO	NOR Gates
DE	Decoders/Demultiplexers	OP	Output Buffers
DF/DT	Flip-Flops, D-Type	OR	OR Gates
EN	Exclusive-NOR Gates	OS	Oscillators
EX	Exclusive-OR Gates	PD/PR	Pulldown/Pullup Terminators
FI	First-In, First-Out Memories	R	Shift Registers
GM/GS	S-R Latches, Gated Type	RA	Hardwired RAM Macro Cells
IO	Bidirectional I/O Buffers	RF	Register Files
IP	Input Buffers	S	Software Macros
IV	Inverters	TA	Flip-Flops, Toggle Type
JK	Flip-Flops, J-K Type	TD	Scan Flip-Flops
LA	Latches, D-Type and S-R	TO	Tie-Off Gate
LH	Bus Holder Latch		

## 1- $\mu$ m TGC100 SERIES CMOS GATE ARRAYS\*

\*Technical data is contained in the TGC100 Series Family Data Sheet (SRGS006).

1

Product Identification and Information

MACRO NUMBER	DESCRIPTION
AN210LJ AN220LJ AN310LJ AN320LJ	2-Input AND Gate 2-Input AND Gate, 2X Drive 3-Input AND Gate 3-Input AND Gate, 2X Drive
AN410LJ AN420LJ AN510LJ AN810LJ	4-Input AND Gate 4-Input AND Gate, 2X Drive 5-Input AND Gate 8-Input AND Gate
AO220LJ AO221LJ AO241LJ BF001LJ	AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$ AND-NOR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$ 2-Wide, 2-Input AND-OR Gate AND-NOR Gate $Y = A1 + (B1 \cdot B2)$
BF011LJ BF022LJ BF051LJ BF053LJ	AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2)$ OR-AND-NOR Gate $Y = A1 \cdot A2 + (B1 \cdot B2) \cdot (C1 + C2)$ OR-NAND Gate $Y = A1 \cdot (B1 + B2)$ OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2)$
BU130LJ BU150LJ DFB20LJ DTB00LJ	Delay Buffer, 3X Drive Delay Buffer, 5X Drive D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Preset, Clear
DTB10LJ DTB20LJ DTC00LJ DTC10LJ	D-Type Flip-Flop with Preset, Clear, 1X Drive D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Clear D-Type Flip-Flop with Clear, 1X Drive
DTC20LJ DTN00LJ DTN10LJ DTN20LJ	D-Type Flip-Flop with Clear, 2X Drive D-Type Flip-Flop D-Type Flip-Flop, 1X Drive D-Type Flip-Flop, 2X Drive
DTP00LJ DTP10LJ DTP20LJ EN210LJ	D-Type Flip-Flop with Preset D-Type Flip-Flop with Preset, 1X Drive D-Type Flip-Flop with Preset, 2X Drive 2-Input Exclusive-NOR Gate
EX210LJ EX220LJ IO#21LJ IO#24LJ	2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate, 2X Drive 2-mA, 3-State I/O Buffer with CMOS Input 2-mA, 3-State I/O Buffer with TTL Input
IO#41LJ IO#44LJ IO#81LJ IO#84LJ	4-mA, 3-State I/O Buffer with CMOS Input 4-mA, 3-State I/O Buffer with TTL Input 8-mA, 3-State I/O Buffer with CMOS Input 8-mA, 3-State I/O Buffer with TTL Input
IO#21LJ IO#24LJ IO#41LJ IO#44LJ	2-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 2-mA, 3-State I/O Buffer with TTL Input with Pull-Up 4-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 4-mA, 3-State I/O Buffer with TTL Input with Pull-Up
IO#81LJ IO#84LJ IO#21LJ IO#24LJ	8-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 8-mA, 3-State I/O Buffer with TTL Input with Pull-Up 2-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 2-mA, 3-State I/O Buffer with TTL Input with Pull-Down
IO#41LJ IO#44LJ IO#81LJ IO#84LJ	4-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 4-mA, 3-State I/O Buffer with TTL Input with Pull-Down 8-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 8-mA, 3-State I/O Buffer with TTL Input with Pull-Down
IPI01LJ IPI04LJ IPI06LJ IPL01LJ	CMOS-Compatible Input Buffer TTL-Compatible Input Buffer CMOS-Compatible Inverting Input Buffer with Hysteresis CMOS-Compatible Input Buffer with Pullup Tap
IPL04LJ IPU01LJ IPU04LJ IV110LJ	TTL-Compatible Input Buffer with Pullup Tap CMOS-Compatible Input Buffer with Pulldown Tap TTL-Compatible Input Buffer with Pulldown Tap Inverter

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

MACRO NUMBER	DESCRIPTION
IV120LJ IV140LJ IV211LJ JKB20LJ	Inverter, 2X Drive Inverter, 4X Drive Inverting 3-State Buffer with Low Enable J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive
JKB21LJ LAB20LJ LAH20LJ LAH22LJ	J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive S-R Latch with 2X Drive D-Type Latch with High Enable, 2X Drive D-Type Latch with Low Enable and Clear, 2X Drive
LH110LJ LH400LJ MU111LJ NA210LJ	3-State Bus Holder 4-Bit Latch 2-Line to 1-Line Multiplexer 2-Input NAND Gate
NA220LJ NA310LJ NA320LJ NA410LJ	2-Input NAND Gate, 2X Drive 3-Input NAND Gate 3-Input NAND Gate, 2X Drive 4-Input NAND Gate
NA420LJ NA510LJ NA520LJ NA810LJ	4-Input NAND Gate, 2X Drive 5-Input NAND Gate 5-Input NAND Gate, 2X Drive 8-Input NAND Gate
NA820LJ NO210LJ NO220LJ NO310LJ	8-Input NAND Gate, 2X Drive 2-Input NOR Gate 2-Input NOR Gate, 2X Drive 3-Input NOR Gate
NO320LJ NO410LJ NO420LJ NO510LJ	3-Input NOR Gate, 2X Drive 4-Input NOR Gate 4-Input NOR Gate, 2X Drive 5-Input NOR Gate
NO520LJ NO810LJ NO820LJ OA241LJ	5-Input NOR Gate, 2X Drive 8-Input NOR Gate 8-Input NOR Gate, 2X Drive 2-Wide, 2-Input AND-OR Invert Gate
OP#20LJ OP#21LJ OP#23LJ OP#24LJ	2-mA, Totem-Pole Output Buffer 2-mA, Open-Drain Output Buffer 2-mA, 3-State Output Buffer with Low Enable 2-mA, P-Channel Open-Drain Output Buffer
OP#40LJ OP#41LJ OP#43LJ OP#44LJ	4-mA, Totem-Pole Output Buffer 4-mA, Open-Drain Output Buffer 4-mA, 3-State Output Buffer with Low Enable 4-mA, P-Channel Open-Drain Output Buffer
OP#80LJ OP#81LJ OP#83LJ OP#84LJ	8-mA, Totem-Pole Output Buffer 8-mA, Open-Drain Output Buffer 8-mA, 3-State Output Buffer with Low Enable 8-mA, P-Channel Open-Drain Output Buffer
OR210LJ OR220LJ OR310LJ OR320LJ	2-Input OR Gate 2-Input OR Gate, 2X Drive 3-Input OR Gate 3-Input OR Gate, 2X Drive
OR410LJ OR420LJ OR510LJ OR810LJ	4-Input OR Gate 4-Input OR Gate, 2X Drive 5-Input OR Gate 8-Input OR Gate
R2405LJ R2406LJ S085LJ S138LJ	4-Bit Flip-Flops with Asynchronous Clear 4-Bit Flip-Flops with Complementary Outputs 4-Bit Magnitude Comparator 3-Line to 8-Line Decoder/Demultiplexer
S139LJ S150LJ S151LJ S153LJ	Dual 2-Line to 4-Line Decoder 16-Line to 1-Line Multiplexer 8-Line to 1-Line Multiplexer Dual 4-Line to 1-Line Multiplexer

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

MACRO NUMBER	DESCRIPTION
S157LJ S161ALJ S163ALJ S164LJ	Quad 2-Line to 1-Line Multiplexer Synchronous 4-Bit Binary Counter with Clear Synchronous 4-Bit Binary Counter 8-Bit Parallel-Out Serial Shift Register
S165LJ S173LJ S175LJ S180XLJ	Parallel-Load 8-Bit Shift Register 4-Bit D-Type Register with 3-State Outputs Quad D-Type Flip-Flop with Complementary Outputs 8-Bit Odd/Even Parity Tree
S181LJ S182LJ A191LJ S193LJ	Arithmetic Logic Unit/Function Generator 4-Bit Look-Ahead Carry Generator Synchronous Up/Down Bin Counter with Down/Up Mode Control Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear)
S194LJ S244LJ S273LJ S283LJ	Bidirectional Universal Shift Register Octal Internal Bus Buffer with 3-State Outputs Octal D-Type Flip-Flop 4-Bit Binary Full Adder with Fast Carry
S373LJ S374LJ S375LJ S686LJ	8-Bit D-Type Latch with 3-State Outputs 8-Bit D-Type Flip-Flop with 3-State Outputs 4-Bit Bistable Latch 8-Bit Magnitude Comparator
S688LJ TAB20LJ TO010LJ	8-Bit Identity Comparator Toggle Flip-Flop with Preset, Clear, 2X Drive High-Level and Low-Level Tie-Off Gate

## 1-µm TSC500 SERIES CMOS STANDARD CELLS\*

\*Technical data is contained in the TCS500 Series Family Data Sheet (SRSS033).

CELL NUMBER	DESCRIPTION
AN210LJ AN220LJ AN240LJ AN260LJ	2-Input AND Gate 2-Input AND Gate, 2X Drive 2-Input AND Gate, 4X Drive 2-Input AND Gate, 6X Drive
AN310LJ AN320LJ AN340LJ AN360LJ	3-Input AND Gate 3-Input AND Gate, 2X Drive 3-Input AND Gate, 4X Drive 3-Input AND Gate, 6X Drive
AN410LJ AN420LJ AN440LJ AN460LJ	4-Input AND Gate 4-Input AND Gate, 2X Drive 4-Input AND Gate, 4X Drive 4-Input AND Gate, 6X Drive
AN510LJ AN810LJ AO220LJ AO221LJ	5-Input AND Gate 8-Input AND Gate AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$ AND-NOR Gate, 2X Drive $Y = \overline{(A \cdot B) + (C \cdot D)}$
BF001LJ BF002LJ BF003LJ BF004LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2 \cdot B3)}$
BF005LJ BF006LJ BF007LJ BF008LJ	AND-NOR Gate $Y = \overline{(A1 \cdot A2 \cdot A3) + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2)}$
BF009LJ BF010LJ BF011LJ BF012LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2)}$ AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$
BF013LJ BF014LJ BF015LJ BF016LJ	AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{(A1 \cdot A2 \cdot A3) + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + C2)]}$ AND-OR-NAND Gate $Y = \overline{A1 + [(B1 + B2) \cdot (C1 + C2)]}$
BF017LJ BF020LJ BF022LJ BF025LJ	OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2)]}$
BF027LJ BF028LJ BF030LJ BF034LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2) \cdot (D1 + D2)]}$ AND-OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + [D1 \cdot D2])]}$ AND-OR-AND-NOR Gate $Y = \overline{(A1 \cdot A2) + [B1 \cdot (C1 + [D1 \cdot D2])]}$
BF035LJ BF051LJ BF052LJ BF053LJ	AND-OR-AND-NOR Gate $Y = \overline{(A1 \cdot A2) + [B1 \cdot ((C1 \cdot C2) + (D1 \cdot D2))]}$ OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2)}$ OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2 + B3)}$ OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2)}$
BF054LJ BF055LJ BF056LJ BF057LJ	OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2 + B3)}$ OR-NAND Gate $Y = \overline{(A1 + A2 + A3) \cdot (B1 + B2 + B3)}$ OR-NAND Gate $Y = \overline{A1 \cdot A2 \cdot (B1 + B2)}$ OR-NAND Gate $Y = \overline{A1 \cdot A2 \cdot (B1 + B2 + B3)}$
BF058LJ BF059LJ BF060LJ BF062LJ	OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2) \cdot (C1 + C2)}$ OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2) \cdot (C1 + C2 + C3)}$ OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)}$ OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2) \cdot (C1 + C2 + C3)}$
BF063LJ BF064LJ BF065LJ BF066LJ	OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)}$ OR-NAND Gate $Y = \overline{(A1 + A2 + A3) \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)}$ AND-OR-NAND Gate $Y = \overline{A1 \cdot [B1 + (C1 \cdot C2)]}$ AND-OR-NAND Gate $Y = \overline{A1 \cdot [B1 \cdot B2 + (C1 \cdot C2)]}$
BF067LJ BF068LJ BF069LJ BF070LJ	AND-OR-NAND Gate $Y = \overline{A1 \cdot [B1 + B2 + (C1 \cdot C2)]}$ AND-OR-NAND Gate $Y = \overline{A1 \cdot [B1 + (C1 \cdot C2) + (D1 \cdot D2)]}$ AND-OR-NAND Gate $Y = \overline{A1 \cdot [(B1 \cdot B2) + (C1 \cdot C2) + (D1 \cdot D2)]}$ AND-OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + (C1 \cdot C2))}$

CELL NUMBER	DESCRIPTION
BF071LJ BF072LJ BF075LJ BF080LJ	AND-OR-NAND Gate $Y = (A1 + A2) \cdot (B1 \cdot B2) + (C1 \cdot C2)$ AND-OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2 + (C1 \cdot C2))$ AND-OR-NAND Gate $Y = (A1 + A2 + A3) \cdot (B1 + (C1 \cdot C2))$ OR-AND-OR-NAND Gate $Y = A1 \cdot (B1 + (C1 \cdot (D1 + D2)))$
BF081LJ BF082LJ BF088LJ BU110LJ	OR-AND-OR-NAND Gate $Y = A1 \cdot (B1 + ((C1 + C2) \cdot (D1 + D2)))$ OR-AND-OR-NAND Gate $Y = A1 \cdot ((B1 \cdot B2) + (C1 \cdot (D1 + D2)))$ OR-AND-OR-NAND Gate $Y = (A1 + A2 + A3) \cdot (B1 + (C1 \cdot (D1 + D2)))$ Delay Buffer
BU111LJ BU112LJ BU120LJ BU130LJ	Inverting Delay Buffer Delay Buffer Delay Buffer, 2X Drive Delay Buffer, 3X Drive
BU221LJ BU222LJ BU261LJ BU262LJ	3-State Buffer with Low Enable, 2X Drive 3-State Buffer with High Enable, 2X Drive 3-State Buffer with Low Enable, 6X Drive 3-State Buffer with High Enable, 6X Drive
DE210LJ DE212LJ DFB20LJ DFC20LJ	2-Line to 4-Line Decoder 2-Line to 4-Line Decoder with High Enable D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Clear, 2X Drive
DFN20LJ DFP20LJ DFY20LJ DFZ20LJ	D-Type Flip-Flop, 2X Drive D-Type Flip-Flop with Preset, 2X Drive D-Type Flip-Flop with Grounded-D, Preset, 2X Drive D-Type Flip-Flop with Grounded-D Input, Preset, Clear, 2X Drive
DTB10LJ DTC10LJ DTN10LJ DTP10LJ	D-Type Flip-Flop with Preset, Clear, 1X Drive D-Type Flip-Flop with Clear, 1X Drive D-Type Flip-Flop, 1X Drive D-Type Flip-Flop with Preset, 1X Drive
EN210LJ EX210LJ EX211LJ EX220LJ	2-Input Exclusive-NOR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate, 2X Drive
EX221LJ EX240LJ EX241LJ FI503LJ	2-Input Exclusive-OR Gate, 2X Drive 2-Input Exclusive-OR Gate, 4X Drive 2-Input Exclusive-OR Gate, 4X Drive 32-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flags
FI600LJ FI603LJ FI703LJ GMS10LJ	64-Word by 8-Bit FIFO with 3-State Outputs 64-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flags 128-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flags 5-Input Gated S-R Latch with Separate Set
GM010LJ GM110LJ GM210LJ GM310LJ	4-Input Gated S-R Latch 5-Input Gated S-R Latch with Separate Reset 6-Input Gated S-R Latch with Separate Set, Reset 6-Input Gated S-R Latch
GM410LJ GM510LJ GSS10LJ GS010LJ	7-Input Gated S-R Latch with Separate Reset 8-Input Gated S-R Latch with Separate Set, Reset 5-Input Gated S-R Latch with Separate Set 4-Input Gated S-R Latch
GS110LJ GS210LJ GS310LJ GS410LJ	5-Input Gated S-R Latch with Separate Reset 6-Input Gated S-R Latch with Separate Set, Reset 6-Input Gated S-R Latch 7-Input Gated S-R Latch with Separate Reset
GS510LJ IO#21LJ IO#41LJ IO#61LJ	8-Input Gated S-R Latch with Separate Set, Reset 2-mA, Push-Pull I/O Buffer with CMOS Input 4-mA, Push-Pull I/O Buffer with CMOS Input 6-mA, Push-Pull I/O Buffer with CMOS Input
IO#01LJ IO#A1LJ IO#B1LJ IO#E1LJ	10-mA, Push-Pull I/O Buffer with CMOS Input 16-mA, Push-Pull I/O Buffer with CMOS Input 16/24-mA, Push-Pull I/O Buffer with CMOS Input 16/48-mA, Push-Pull I/O Buffer with CMOS Input

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

CELL NUMBER	DESCRIPTION
IO#G1LJ IO#24LJ IO#44LJ IO#64LJ	16/64-mA, Push-Pull I/O Buffer with CMOS Input 2-mA, Push-Pull I/O Buffer with TTL Input 4-mA, Push-Pull I/O Buffer with TTL Input 6-mA, Push-Pull I/O Buffer with TTL Input
IO#04LJ IO#A4LJ IO#B4LJ IO#E4LJ	10-mA, Push-Pull I/O Buffer with TTL Input 16-mA, Push-Pull I/O Buffer with TTL Input 16/24-mA, Push-Pull I/O Buffer with TTL Input 16/48-mA, Push-Pull I/O Buffer with TTL Input
IO#G4LJ IO#2HLJ IO#4HLJ IO#6HLJ	16/64-mA, Push-Pull I/O Buffer with TTL Input 2-mA, Open-Drain I/O Buffer with CMOS Input 4-mA, Open-Drain I/O Buffer with CMOS Input 6-mA, Open-Drain I/O Buffer with CMOS Input
IO#0HLJ IO#AHLJ IO#BHLJ IO#EHLJ	10-mA, Open-Drain I/O Buffer with CMOS Input 16-mA, Open-Drain I/O Buffer with CMOS Input 24-mA, Open-Drain I/O Buffer with CMOS Input 48-mA, Open-Drain I/O Buffer with CMOS Input
IO#GHLJ IO#2KLJ IO#4KLJ IO#6KLJ	64-mA, Open-Drain I/O Buffer with CMOS Input 2-mA, Open-Drain I/O Buffer with TTL Input 4-mA, Open-Drain I/O Buffer with TTL Input 6-mA, Open-Drain I/O Buffer with TTL Input
IO#0KLJ IO#AKLJ IO#BKLJ IO#EKLJ	10-mA, Open-Drain I/O Buffer with TTL Input 16-mA, Open-Drain I/O Buffer with TTL Input 24-mA, Open-Drain I/O Buffer with TTL Input 48-mA, Open-Drain I/O Buffer with TTL Input
IO#GKLJ IPI01LJ IPI11LJ IPI04LJ	64-mA, Open-Drain I/O Buffer with TTL Input CMOS-Compatible Non-Inverting Input Buffer CMOS-Compatible Non-Inverting Clock Buffer TTL-Compatible Non-Inverting Input Buffer
IPI14LJ IPI07LJ IPI09LJ IV101LJ	TTL-Compatible Non-Inverting Clock Buffer CMOS-Compatible Non-Inverting Input Buffer with Hysteresis TTL-Compatible Non-Inverting Input Buffer with Hysteresis Inverter, 10X Drive
IV110LJ IV120LJ IV130LJ IV140LJ	Inverter Inverter, 2X Drive Inverter, 3X Drive Inverter, 4X Drive
IV160LJ IV180LJ IV211LJ IV212LJ	Inverter, 6X Drive Inverter, 8X Drive Inverting 3-State Buffer with Low Enable Inverting 3-State Buffer with High Enable
IV221LJ IV222LJ IV241LJ IV242LJ	Inverting 3-State Buffer with Low Enable, 2X Drive Inverting 3-State Buffer with High Enable, 2X Drive Inverting 3-State Buffer with Low Enable, 4X Drive Inverting 3-State Buffer with High Enable, 4X Drive
JKB20LJ JKB21LJ LAB10LJ LAB20LJ	J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive S-R Latch S-R Latch, 2X Drive
LAH10LJ LAH11LJ LAH20LJ LAH21LJ	D-Type Latch with High Enable D-Type Latch with High Enable D-Type Latch with High Enable, 2X Drive D-Type Latch with High Enable, 2X Drive
LAL20LJ LH110LJ M01MPLJ M02CGLJ	D-Type Latch with Low Enable 3-State Bus Holder 4-Bit Microprocessor Slice (2901) Look-Ahead Carry Generator (2902)
M04SSLJ M10MCLJ MU110LJ MU111LJ	Status and Shift Controller (2904) Microprogram Controller (2910) 2-Line to 1-Line Multiplexer with 3-State Output 2-Line to 1-Line Multiplexer

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.



CELL NUMBER	DESCRIPTION
MU210LJ MU211LJ MU310LJ MU320LJ	4-Line to 1-Line Multiplexer 4-Line to 1-Line Multiplexer 8-Line to 1-Line Multiplexer with 3-State Output 8-Line to 1-Line Multiplexer, 2X Drive
NA210LJ NA220LJ NA230LJ NA240LJ	2-Input NAND Gate 2-Input NAND Gate, 2X Drive 2-Input NAND Gate, 3X Drive 2-Input NAND Gate, 4X Drive
NA260LJ NA310LJ NA320LJ NA330LJ	2-Input NAND Gate, 6X Drive 3-Input NAND Gate 3-Input NAND Gate, 2X Drive 3-Input NAND Gate, 3X Drive
NA340LJ NA410LJ NA420LJ NA430LJ	3-Input NAND Gate, 4X Drive 4-Input NAND Gate 4-Input NAND Gate, 2X Drive 4-Input NAND Gate, 3X Drive
NA510LJ NA520LJ NA810LJ NA820LJ	5-Input NAND Gate 5-Input NAND Gate, 2X Drive 8-Input NAND Gate 8-Input NAND Gate, 2X Drive
NO210LJ NO220LJ NO230LJ NO240LJ	2-Input NOR Gate 2-Input NOR Gate, 2X Drive 2-Input NOR Gate, 3X Drive 2-Input NOR Gate, 4X Drive
NO310LJ NO320LJ NO330LJ NO410LJ	3-Input NOR Gate 3-Input NOR Gate, 2X Drive 3-Input NOR Gate, 3X Drive 4-Input NOR Gate
NO420LJ NO510LJ NO520LJ NO810LJ	4-Input NOR Gate, 2X Drive 5-Input NOR Gate 5-Input NOR Gate, 2X Drive 8-Input NOR Gate
NO820LJ OP#20LJ OP#40LJ OP#60LJ	8-Input NOR Gate, 2X Drive 2-mA, Push-Pull Output Buffer 4-mA, Push-Pull Output Buffer 6-mA, Push-Pull Output Buffer
OP#00LJ OP#A0LJ OP#B0LJ OP#E0LJ	10-mA, Push-Pull Output Buffer 16-mA, Push-Pull Output Buffer 16/24-mA, Push-Pull Output Buffer 16/48-mA, Push-Pull Output Buffer
OP#G0LJ OP#21LJ OP#41LJ OP#61LJ	16/64-mA, Push-Pull Output Buffer 2-mA, Open-Drain Output Buffer 4-mA, Open-Drain Output Buffer 6-mA, Open-Drain Output Buffer
OP#01LJ OP#A1LJ OP#B1LJ OP#E1LJ	10-mA, Open-Drain Output Buffer 16-mA, Open-Drain Output Buffer 24-mA, Open-Drain Output Buffer 48-mA, Open-Drain Output Buffer
OP#G1LJ OP#23LJ OP#43LJ OP#63LJ	64-mA, Open-Drain Output Buffer 2-mA, 3-State Output Buffer 4-mA, 3-State Output Buffer 6-mA, 3-State Output Buffer
OP#03LJ OP#A3LJ OP#B3LJ OP#E3LJ	10-mA, 3-State Output Buffer 16-mA, 3-State Output Buffer 16/24-mA, 3-State Output Buffer 16/48-mA, 3-State Output Buffer
OP#G3LJ OR210LJ OR220LJ OR240LJ	16/64-mA, 3-State Output Buffer 2-Input OR Gate 2-Input OR Gate, 2X Drive 2-Input OR Gate, 4X Drive

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

CELL NUMBER	DESCRIPTION
OR260LJ OR310LJ OR320LJ OR340LJ	2-Input OR Gate, 6X Drive 3-Input OR Gate 3-Input OR Gate, 2X Drive 3-Input OR Gate, 4X Drive
OR360LJ OR410LJ OR420LJ OR440LJ	3-Input OR Gate, 6X Drive 4-Input OR Gate 4-Input OR Gate, 2X Drive 4-Input OR Gate, 4X Drive
OR460LJ OR510LJ OR810LJ OSI01LJ	4-Input OR Gate, 6X Drive 5-Input OR Gate 8-Input OR Gate 75 MHz (MAX) Crystal-Controlled Oscillator
OSI02LJ OSI03LJ OSI04LJ PD095LJ	55 MHz (MAX) Crystal-Controlled Oscillator 35 MHz (MAX) Crystal-Controlled Oscillator 20 MHz (MAX) Crystal-Controlled Oscillator 95- $\mu$ A, Pulldown Active Terminator
PR005LJ PR095LJ PR250LJ PR400LJ	5- $\mu$ A, Pullup Active Terminator 95- $\mu$ A, Pullup Active Terminator 250- $\mu$ A, Pullup Active Terminator 5- $\mu$ A, Pullup Active Terminator
PUC00LJ R2401LJ R2402LJ R2403LJ	Power-Up Clear One-Shot 4-Bit Shift Register with Serial Inputs, Asynchronous Clear 4-Bit Shift Register with Serial Inputs, Complementary Outputs 4-Bit Shift Register with Serial and Parallel Inputs
R2404LJ R2405LJ R2406LJ R2407LJ	4-Bit Shift Register with Serial/Parallel Inputs, Complementary Outputs 4-Bit Flip-Flops with Asynchronous Clear 4-Bit Flip-Flops with Complementary Outputs 4-Bit Flip-Flops with 3-State Outputs
R2408LJ RF400LJ RF401LJ RF402LJ	4-Bit Ripple Counter 16-Word by 8-Bit 3-Port Register File with 3-State Outputs 16-Word by 8-Bit 4-Port Register File with 3-State Outputs 16-Word by 9-Bit 3-Port Register File with 3-State Outputs
RF600LJ RF601LJ RF602LJ S085LJ	64-Word by 8-Bit 3-Port Register File with 3-State Outputs 64-Word by 8-Bit 4-Port Register File with 3-State Outputs 64-Word by 9-Bit 3-Port Register File with 3-State Outputs 4-Bit Magnitude Comparator
S137LJ S138LJ S139LJ S151LJ	3-Line to 8-Line Decoder with Address Latches 3-Line to 8-Line Decoder/Demultiplexer Dual 2-Line to 4-Line Decoder 8-Line to 1-Line Multiplexer
S153LJ S155LJ S157LJ S158LJ	Dual 4-Line to 1-Line Multiplexer Dual 2-Line to 4-Line Decoder with Data, Enable Quad 2-Line to 1-Line Multiplexer Quad 2-Line to 1-Line Inverting Multiplexer
S161ALJ S163ALJ S164LJ S165LJ	Synchronous 4-Bit Binary Counter with Clear Synchronous 4-Bit Binary Counter 8-Bit Parallel-Out Serial Shift Register Parallel-Load 8-Bit Shift Register
S166LJ S173LJ S174LJ S175LJ	Parallel-Load 8-Bit Shift Register with Clear 4-Bit D-Type Register with 3-State Outputs Hex D-Type Flip-Flop Quad D-Type Flip-Flop with Complementary Outputs
S177LJ S181LJ S191LJ S193LJ	1-Bit and 3-Bit Binary Ripple Counters Arithmetic Logic Unit/Function Generator Synchronous 4-Bit Up/Down Binary Counter with Down/Up Mode Control Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear)
S194ALJ S195ALJ S244LJ S245LJ	Bidirectional Universal Shift Register 4-Bit Parallel-Access Shift Register Octal Internal Bus Buffer with 3-State Outputs Octal Internal 3-State Bus Transceiver

CELL NUMBER	DESCRIPTION
S251LJ S257ALJ S258ALJ S259LJ	8-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Inverting Multiplexer with 3-State Outputs 8-Bit Addressable Latch
S273LJ S280LJ S283LJ S298LJ	Octal D-Type Flip-Flop 9-Bit Odd/Even Parity Generator/Checker 4-Bit Binary Full Adder, Fast Carry Quad 2-Input Multiplexer with Negative-Edge-Triggered Register
S299LJ S299XLJ S373LJ S374LJ	8-Bit Bidirectional Shift/Storage Register 8-Bit Bidirectional Shift Register 8-Bit D-Type Latch with 3-State Outputs 8-Bit D-Type Flip-Flop with 3-State Outputs
S375LJ S393LJ S398LJ S399LJ	4-Bit Bistable Latch Dual 4-Bit Ripple Counters Quad 2-Input Multiplexer with Complementary Output Register Quad 2-Input Multiplexer with Edge-Triggered Register
S590LJ S593XLJ S595LJ S598XLJ	8-Bit Binary Counter with 3-State Output Register 8-Bit Binary Counter with Input Register 8-Bit Shift Register with 3-State Output Register 8-Bit Shift Register with Input Register
S651LJ S652LJ S669LJ S686LJ	8-Bit Bidirectional Register with Inverting Data Path 8-Bit Bidirectional Transceiver Register Synchronous 4-Bit Up/Down Binary Counter with Look-Ahead 8-Bit Magnitude Comparator
S688LJ TAB20LJ TAC20LJ TAP20LJ	8-Bit Identity Comparator Toggle Flip-Flop with Preset, Clear, 2X Drive Toggle Flip-Flop with Clear, 2X Drive Toggle Flip-Flop with Preset, 2X Drive
TDC10LJ TDN10LJ TO010LJ	D-Type Scan Flip-Flop with Clear D-Type Scan Flip-Flop High-Level and Low-Level Tie-Off Gate

## 2- $\mu$ m SystemCell™ SERIES CMOS STANDARD CELLS\*

\*Technical data is contained in the 2- $\mu$ m CMOS StandardCell Databook (SRSD001).

CELL NUMBER	DESCRIPTION
AN210LH AN220LH AN240LH AN260LH	2-Input AND Gate 2-Input AND Gate, 2X Drive 2-Input AND Gate, 4X Drive 2-Input AND Gate, 6X Drive
AN310LH AN320LH AN340LH AN360LH	3-Input AND Gate 3-Input AND Gate, 2X Drive 3-Input AND Gate, 4X Drive 3-Input AND Gate, 6X Drive
AN410LH AN420LH AN440LH AN460LH	4-Input AND Gate 4-Input AND Gate, 2X Drive 4-Input AND Gate, 4X Drive 4-Input AND Gate, 6X Drive
AN510LH AN810LH AO220LH AO221LH	5-Input AND Gate 8-Input AND Gate AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$ AND-NOR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$
BF001LH BF002LH BF003LH BF004LH	AND-NOR Gate $Y = A1 + (B1 \cdot B2)$ AND-NOR Gate $Y = A1 + (B1 \cdot B2 \cdot B3)$ AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2)$ AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2 \cdot B3)$
BF005LH BF006LH BF007LH BF008LH	AND-NOR Gate $Y = (A1 \cdot A2 \cdot A3) + (B1 \cdot B2 \cdot B3)$ AND-NOR Gate $Y = A1 + A2 + (B1 \cdot B2)$ AND-NOR Gate $Y = A1 + A2 + (B1 \cdot B2 \cdot B3)$ AND-NOR Gate $Y = A1 + (B1 \cdot B2) + (C1 \cdot C2)$
BF009LH BF010LH BF011LH BF012LH	AND-NOR Gate $Y = A1 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)$ AND-NOR Gate $Y = A1 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)$ AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2)$ AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)$
BF013LH BF014LH BF015LH BF016LH	AND-NOR Gate $Y = (A1 \cdot A2) + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)$ AND-NOR Gate $Y = (A1 \cdot A2 \cdot A3) + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)$ OR-AND-NOR Gate $Y = A1 + [B1 \cdot (C1 + C2)]$ AND-OR-NAND Gate $Y = A1 + [(B1 + B2) \cdot (C1 + C2)]$
BF017LH BF020LH BF022LH BF025LH	OR-AND-NOR Gate $Y = A1 + [B1 \cdot B2 \cdot (C1 + C2)]$ OR-AND-NOR Gate $Y = A1 \cdot A2 + [B1 \cdot (C1 + C2)]$ OR-AND-NOR Gate $Y = A1 \cdot A2 + [B1 \cdot B2 \cdot (C1 + C2)]$ OR-AND-NOR Gate $Y = A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2)]$
BF027LH BF028LH BF030LH BF034LH	OR-AND-NOR Gate $Y = A1 \cdot A2 \cdot A3 + [B1 \cdot B2 \cdot (C1 + C2)]$ OR-AND-NOR Gate $Y = A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2) \cdot (D1 + D2)]$ AND-OR-AND-NOR Gate $Y = A1 + [B1 \cdot (C1 + (D1 \cdot D2))]$ AND-OR-AND-NOR Gate $Y = (A1 \cdot A2) + [B1 \cdot (C1 + (D1 \cdot D2))]$
BF035LH BF051LH BF052LH BF053LH	AND-OR-AND-NOR Gate $Y = (A1 \cdot A2) + [B1 \cdot ((C1 \cdot C2) + (D1 \cdot D2))]$ OR-NAND Gate $Y = A1 \cdot (B1 + B2)$ OR-NAND Gate $Y = A1 \cdot (B1 + B2 + B3)$ OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2)$
BF054LH BF055LH BF056LH BF057LH	OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2 + B3)$ OR-NAND Gate $Y = (A1 + A2 + A3) \cdot (B1 + B2 + B3)$ OR-NAND Gate $Y = A1 \cdot A2 \cdot (B1 + B2)$ OR-NAND Gate $Y = A1 \cdot A2 \cdot (B1 + B2 + B3)$
BF058LH BF059LH BF060LH BF062LH	OR-NAND Gate $Y = A1 \cdot (B1 + B2) \cdot (C1 + C2)$ OR-NAND Gate $Y = A1 \cdot (B1 + B2) \cdot (C1 + C2 + C3)$ OR-NAND Gate $Y = A1 \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$ OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2) \cdot (C1 + C2 + C3)$
BF063LH BF064LH BF065LH BF066LH	OR-NAND Gate $Y = (A1 + A2) \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$ OR-NAND Gate $Y = (A1 + A2 + A3) \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$ AND-OR-NAND Gate $Y = A1 \cdot [B1 + (C1 \cdot C2)]$ AND-OR-NAND Gate $Y = A1 \cdot [(B1 \cdot B2) + (C1 \cdot C2)]$
BF067LH BF068LH BF069LH BF070LH	AND-OR-NAND Gate $Y = A1 \cdot [B1 + B2 + (C1 \cdot C2)]$ AND-OR-NAND Gate $Y = A1 \cdot [B1 + (C1 \cdot C2) + (D1 \cdot D2)]$ AND-OR-NAND Gate $Y = A1 \cdot [(B1 \cdot B2) + (C1 \cdot C2) + (D1 \cdot D2)]$ AND-OR-NAND Gate $Y = (A1 + A2) \cdot [B1 + (C1 \cdot C2)]$

1

Product Identification and Information

CELL NUMBER	DESCRIPTION
BF071LH BF072LH BF075LH BF080LH	AND-OR-NAND Gate $Y = \overline{(A1+A2) \cdot (B1 \cdot B2) + (C1 \cdot C2)}$ AND-OR-NAND Gate $Y = \overline{(A1+A2) \cdot (B1+B2 + (C1 \cdot C2))}$ AND-OR-NAND Gate $Y = \overline{(A1+A2+A3) \cdot (B1 + (C1 \cdot C2))}$ OR-AND-OR-NAND Gate $Y = A1 \cdot (B1 + (C1 \cdot (D1 + D2)))$
BF081LH BF082LH BF088LH BU110LH	OR-AND-OR-NAND Gate $Y = A1 \cdot (B1 + ((C1 + C2) \cdot (D1 + D2)))$ OR-AND-OR-NAND Gate $Y = A1 \cdot (B1 \cdot B2 + (C1 \cdot (D1 + D2)))$ OR-AND-OR-NAND Gate $Y = (A1 + A2 + A3) \cdot (B1 + (C1 \cdot (D1 + D2)))$ Delay Buffer
BU111LH BU112LH BU120LH BU130LH	Inverting Delay Buffer Delay Buffer Delay Buffer, 2X Drive Delay Buffer, 3X Drive
BU221LH BU222LH BU261LH BU262LH	3-State Buffer with Low Enable, 2X Drive 3-State Buffer with High Enable, 2X Drive 3-State Buffer with Low Enable, 6X Drive 3-State Buffer with High Enable, 6X Drive
DE210LH DE212LH DFB20LH DFC20LH	2-Line to 4-Line Decoder 2-Line to 4-Line Decoder with High Enable D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Clear, 2X Drive
DFN20LH DFP20LH DFY20LH DFZ20LH	D-Type Flip-Flop, 2X Drive D-Type Flip-Flop with Preset, 2X Drive D-Type Flip-Flop with Grounded-D, Preset, 2X Drive D-Type Flip-Flop with Grounded-D Input, Preset, Clear, 2X Drive
DTB10LH DTC10LH DTN10LH DTP10LH	D-Type Flip-Flop with Preset, Clear, 1X Drive D-Type Flip-Flop with Clear, 1X Drive D-Type Flip-Flop, 1X Drive D-Type Flip-Flop with Preset, 1X Drive
EN210LH EX210LH EX211LH EX220LH	2-Input Exclusive-NOR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate, 2X Drive
EX221LH EX240LH EX241LH GMS10LH	2-Input Exclusive-OR Gate, 2X Drive 2-Input Exclusive-OR Gate, 4X Drive 2-Input Exclusive-OR Gate, 4X Drive 5-Input Gated S-R Latch with Separate Set
GM010LH GM110LH GM210LH GM310LH	4-Input Gated S-R Latch 5-Input Gated S-R Latch with Separate Reset 6-Input Gated S-R Latch with Separate Set, Reset 6-Input Gated S-R Latch
GM410LH GM510LH GSS10LH GS010LH	7-Input Gated S-R Latch with Separate Reset 8-Input Gated S-R Latch with Separate Set, Reset 5-Input Gated S-R Latch with Separate Set 4-Input Gated S-R Latch
GS110LH GS210LH GS310LH GS410LH	5-Input Gated S-R Latch with Separate Reset Input Gated S-R Latch with Separate Set, Reset 6-Input Gated S-R Latch 7-Input Gated S-R Latch with Separate Reset
GS510LH IOFB4LH IOFB8LH IOFD8LH	8-Input Gated S-R Latch with Separate Set, Reset 24-mA, 3-State I/O Buffer with TTL Input 24-mA, 3-State I/O Buffer with TTL Input 44-mA, 3-State I/O Buffer with Inverting TTL Input
IOFE8LH IOF00LH IOF01LH IOF03LH	48-mA, Open-Drain I/O Buffer with Inverting TTL Input, Hysteresis 10-mA, 3-State I/O Buffer with Inverting CMOS Input 10-mA, 3-State I/O Buffer with CMOS Input 10-mA, 3-State I/O Buffer with Inverting TTL Input
IOF04LH IOF21LH IOF24LH IOF40LH	10-mA, 3-State I/O Buffer with TTL Input 2-mA, 3-State I/O Buffer with CMOS Input 2-mA, 3-State I/O Buffer with TTL Input 4-mA, 3-State I/O Buffer with Inverting CMOS Input

CELL NUMBER	DESCRIPTION
IOF41LH IOF43LH IOF44LH IOF47LH	4-mA, 3-State I/O Buffer with CMOS Input 4-mA, 3-State I/O Buffer with Inverting TTL Input 4-mA, 3-State I/O Buffer with TTL Input 4-mA, 3-State I/O Buffer with Inverting CMOS Input with Hysteresis
IOF48LH IOF64LH IPF00LH IPF01LH	4-mA, 3-State I/O Buffer with Inverting TTL Input with Hysteresis 6-mA, 3-State I/O Buffer with TTL Input CMOS-Compatible Inverting Input Buffer CMOS-Compatible Input Buffer
IPF02LH IPF03LH IPF04LH IPF05LH	CMOS-Compatible Inverting Input Buffer with Pullup Tap TTL-Compatible Inverting Input Buffer TTL-Compatible Input Buffer TTL-Compatible Inverting Input Buffer with Pullup Tap
IPF06LH IPF08LH IPF10LH IPF12LH	CMOS Inverting Input Buffer with Hysteresis TTL Inverting Input Buffer with Hysteresis, Pullup Tap TTL Input Buffer with Hysteresis, Pullup Tap TTL-Compatible Input Buffer
IPF13LH IV101LH IV110LH IV120LH	TTL-Compatible Inverting Input Buffer with Pullup Tap Inverter, 10X Drive Inverter Inverter, 2X Drive
IV130LH IV140LH IV160LH IV180LH	Inverter, 3X Drive Inverter, 4X Drive Inverter, 6X Drive Inverter, 8X Drive
IV211LH IV212LH IV221LH IV222LH	Inverting 3-State Buffer with Low Enable Inverting 3-State Buffer with High Enable Inverting 3-State Buffer with Low Enable, 2X Drive Inverting 3-State Buffer with High Enable, 2X Drive
IV241LH IV242LH JKB20LH JKB21LH	Inverting 3-State Buffer with Low Enable, 4X Drive Inverting 3-State Buffer with High Enable, 4X Drive J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive
LAB10LH LAB20LH LAH10LH LAH11LH	S-R Latch S-R Latch, 2X Drive D-Type Latch with High Enable D-Type Latch with High Enable
LAH20LH LAH21LH LAL20LH LH110LH	D-Type Latch with High Enable, 2X Drive D-Type Latch with High Enable, 2X Drive D-Type Latch with Low Enable 3-State Bus Holder
MU110LH MU111LH MU210LH MU211LH	2-Line to 1-Line Multiplexer with 3-State Output 2-Line to 1-Line Multiplexer 4-Line to 1-Line Multiplexer 4-Line to 1-Line Multiplexer
MU310LH MU320LH MVF00LH NA210LH	8-Line to 1-Line Multiplexer with 3-State Output 8-Line to 1-Line Multiplexer, 2X Drive Retriggerable Monostable Multivibrator 2-Input NAND Gate
NA220LH NA230LH NA240LH NA260LH	2-Input NAND Gate, 2X Drive 2-Input NAND Gate, 3X Drive 2-Input NAND Gate, 4X Drive 2-Input NAND Gate, 6X Drive
NA310LH NA320LH NA330LH NA340LH	3-Input NAND Gate 3-Input NAND Gate, 2X Drive 3-Input NAND Gate, 3X Drive 3-Input NAND Gate, 4X Drive
NA410LH NA420LH NA430LH NA510LH	4-Input NAND Gate 4-Input NAND Gate, 2X Drive 4-Input NAND Gate, 3X Drive 5-Input NAND Gate

CELL NUMBER	DESCRIPTION
NA520LH NA810LH NA820LH NO210LH	5-Input NAND Gate, 2X Drive 8-Input NAND Gate 8-Input NAND Gate, 2X Drive 2-Input NOR Gate
NO220LH NO230LH NO240LH NO310LH	2-Input NOR Gate, 2X Drive 2-Input NOR Gate, 3X Drive 2-Input NOR Gate, 4X Drive 3-Input NOR Gate
NO320LH NO330LH NO410LH NO420LH	3-Input NOR Gate, 2X Drive 3-Input NOR Gate, 3X Drive 4-Input NOR Gate 4-Input NOR Gate, 2X Drive
NO510LH NO520LH NO810LH NO820LH	5-Input NOR Gate 5-Input NOR Gate, 2X Drive 8-Input NOR Gate 8-Input NOR Gate, 2X Drive
OPFB0LH OPFB3LH OPFD3LH OPFE1LH	24-mA, Totem-Pole Output Buffer 24-mA, 3-State Output Buffer with Low Enable 44-mA, 3-State Output Buffer with Low Enable 48-mA, Open-Drain Output Buffer
OPF00LH OPF01LH OPF03LH OPF20LH	10-mA, Totem-Pole Output Buffer 10-mA, Open-Drain Output Buffer 10-mA, 3-State Output Buffer with Low Enable 2-mA, Totem-Pole Output Buffer
OPF23LH OPF40LH OPF41LH OPF43LH	2-mA, 3-State Output Buffer with Low Enable 4-mA, Totem-Pole Output Buffer 4-mA, Open-Drain Output Buffer 4-mA, 3-State Output Buffer with Low Enable
OPF60LH OPF61LH OPF63LH OR210LH	6-mA, Totem-Pole Output Buffer 6-mA, Open-Drain Output Buffer 6-mA, 3-State Output Buffer with Low Enable 2-Input OR Gate
OR220LH OR240LH OR260LH OR310LH	2-Input OR Gate, 2X Drive 2-Input OR Gate, 4X Drive 2-Input OR Gate, 6X Drive 3-Input OR Gate
OR320LH OR340LH OR360LH OR410LH	3-Input OR Gate, 2X Drive 3-Input OR Gate, 4X Drive 3-Input OR Gate, 6X Drive 4-Input OR Gate
OR420LH OR440LH OR460LH OR510LH	4-Input OR Gate, 2X Drive 4-Input OR Gate, 4X Drive 4-Input OR Gate, 6X Drive 5-Input OR Gate
OR810LH OSF00LH OSF01LH OSF06LH	8-Input OR Gate 5-MHz (MAX) Crystal-Controlled Oscillator 100-kHz (MAX) RC Oscillator 800-kHz (MAX) Crystal-Controlled Oscillator
OSF07LH PD095LH PR005LH PR095LH	200-kHz (MAX) RC Oscillator 95- $\mu$ A, Pulldown Active Terminator 5- $\mu$ A, Pullup Active Terminator 95- $\mu$ A, Pullup Active Terminator
PR250LH PR400LH PUC00LH RA408LH	250- $\mu$ A, Pullup Active Terminator 5- $\mu$ A, Pullup Active Terminator Power-Up Clear One-Shot 16-Word by 8-Bit Static Read/Write RAM with 3-State Outputs
RA608LH RA708LH RA802LH RF408LH	64-Word by 8-Bit Static Read/Write RAM with 3-State Outputs 128-Word by 8-Bit Static Read/Write RAM with 3-State Outputs 256-Word by 2-Bit Static Read/Write RAM with 3-State Outputs 16-Word by 8-Bit 3-Port Register File

CELL NUMBER	DESCRIPTION
R2401LH R2402LH R2403LH R2404LH	4-Bit Shift Register with Serial Input, Asynchronous Clear 4-Bit Shift Register with Serial Input, Complementary Outputs 4-Bit Shift Register with Serial and Parallel Inputs 4-Bit Shift Register with Serial/Parallel Inputs, Complementary Outputs
R2405LH R2406LH R2407LH R2408LH	4-Bit Flip-Flops with Asynchronous Clear 4-Bit Flip-Flops with Complementary Outputs 4-Bit Flip-Flops with 3-State Outputs 4-Bit Ripple Counter
S085LH S137LH S138LH S139LH	4-Bit Magnitude Comparator 3-Line to 8-Line Decoder with Address Latches 3-Line to 8-Line Decoder/Demultiplexer Dual 2-Line to 4-Line Decoder
S151LH S153LH S155LH S157LH	8-Line to 1-Line Multiplexer Dual 4-Line to 1-Line Multiplexer Dual 2-Line to 4-Line Decoder with Data, Enable Quad 2-Line to 1-Line Multiplexer
S158LH S161ALH S163ALH S164LH	Quad 2-Line to 1-Line Inverting Multiplexer Synchronous 4-Bit Binary Counter with Clear Synchronous 4-Bit Binary Counter 8-Bit Parallel-Out Serial Shift Register
S165LH S166LH S173LH S174LH	Parallel-Load 8-Bit Shift Register Parallel-Load 8-Bit Shift Register with Clear 4-Bit D-Type Register with 3-State Outputs Hex D-Type Flip-Flop
S175LH S177LH S181LH S191LH	Quad D-Type Flip-Flop with Complementary Outputs 1-Bit and 3-Bit Binary Ripple Counters Arithmetic Logic Unit/Function Generator Synchronous 4-bit Up/Down Binary Counter with Down/Up Mode Control
S193LH S194ALH S195ALH S244LH	Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear) Bidirectional Universal Shift Register 4-Bit Parallel-Access Shift Register Octal Internal Bus Buffer with 3-State Outputs
S245LH S251LH S257ALH S258ALH	Octal Internal 3-State Bus Transceiver 8-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Inverting Multiplexer with 3-State Outputs
S259LH S273LH S280LH S283LH	8-Bit Addressable Latch Octal D-Type Flip-Flop 9-Bit Odd/Even Parity Generator/Checker 4-Bit Binary Full Adder, Fast Carry
S298LH S299LH S299XLH S373LH	Quad 2-Input Multiplexer with Negative-Edge-Triggered Register 8-Bit Bidirectional Shift/Storage Register 8-Bit Bidirectional Shift Register 8-Bit D-Type Latch with 3-State Outputs
S374LH S375LH S393LH S398LH	8-Bit D-Type Flip-Flop with 3-State Outputs 4-Bit Bistable Latch Dual 4-Bit Ripple Counters Quad 2-Input Multiplexer with Complementary Output Register
S399LH S590LH S593XLH S595LH	Quad 2-Input Multiplexer with Edge-Triggered Register 8-Bit Binary Counter with 3-State Output Register 8-Bit Binary Counter with Input Register 8-Bit Shift Register with 3-State Out Register
S598XLH S651LH S652LH S669LH	8-Bit Shift Register with Input Register 8-Bit Bidirectional Register with Inverting Data Path 8-Bit Bidirectional Transceiver Register Synchronous 4-Bit Up/Down Binary Counter with Look-Ahead
S686LH S688LH TAB20LH TAC20LH	8-Bit Magnitude Comparator 8-Bit Identity Comparator Toggle Flip-Flop with Preset, Clear, 2X Drive Toggle Flip-Flop with Clear, 2X Drive



---

CELL NUMBER	DESCRIPTION
TAP20LH TO010LH	Toggle Flip-Flop with Preset, 2X Drive High-Level and Low-Level Tie-Off Gate

1

Product Identification and Information

## Catalog Products Alphanumeric Index

### USING THE ALPHANUMERIC INDEX

The Catalog Products Alphanumeric Index lists and describes all other TI semiconductor products and services — all products-package options are shown for clarity. The index references the section and page, within the Guide, containing additional information on a particular product or circuit design tool and support service, and cites the TI reference document containing the most current technical data. An example follows:

Product Number	General Description	Section and Page	TI Reference Document
SN74ALS2541DW	Octal Buffer and Line Driver	3-17	SDAD001B
SN74ALS2541FN	Octal Buffer and Line Driver	3-17	SDAD001B
SN74ALS2541N	Octal Buffer and Line Driver	3-17	SDAD001B
SN74ALS2967JD	Dynamic Memory Controller	3-33	SDAS121A
SN74ALS2968JD	Dynamic Memory Controller	3-33	SDAS121A
SN74ALS6301JD	Dynamic Memory Controller	3-33	SDAS120A
SN74ALS8003AP	Dual 2-Input NAND Gate	3-4	SDAD001B

### SECTION AND PAGE LOCATOR

Column headings ‘Section and Page’ reference the section(s) and page(s) within the Guide containing additional information on specific products or circuit design tools and support services.

Familiarity with the numbering sequence makes the Product Identification and Information Section of the Master Selection Guide easy to use.

### TI REFERENCE DOCUMENT

Column headings ‘TI Reference Document’ provides the latest available technical source for a particular product. TI’s technical literature is identified by a seven- or eight-character product source code consisting of four (4) alpha characters, three (3) numeric characters, and a revision letter if applicable. The fourth alpha character designates a particular document as follows:

CODES	DESCRIPTION
D	Data Books
S	Data Sheets, Data Manuals on single products

For example, literature code SDLD001 identifies a data book, code SPRT036 a data sheet, and code SLNS003A a revised data sheet. The code is printed at the upper right-hand corner on the front cover and the lower left-hand corner on the back cover of a data book, and at the lower left-hand corner on the back page of a data sheet.

Section 12 of the Guide provides the reader with instructions for obtaining technical literature from Texas Instruments.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
ADC0803CN ADC0803IN ADC0804CN ADC0804IN	A/D Converter A/D Converter A/D Converter A/D Converter	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0805CN ADC0805IN ADC0808FN ADC0808MFK	A/D Converter A/D Converter A/D Converter A/D Converter	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0808MJ ADC0808N ADC0809FN ADC0809N	A/D Converter A/D Converter A/D Converter A/D Converter	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0831ACP ADC0831AIP ADC0831BCP ADC0831BIP	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0832ACP ADC0832AIP ADC0832BCP ADC0832BIP	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0834ACN ADC0834AIN ADC0834BCN ADC0834BIN	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
ADC0838ACN ADC0838AIN ADC0838BCN ADC0838BIN	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
AM26LS31CD AM26LS31CJ AM26LS31CN AM26LS32ACD	Line Driver Line Driver Line Driver Line Receiver	6-2 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002
AM26LS32ACJ AM26LS32ACN AM26LS32AMFK AM26LS32AMJ	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
AM26LS33ACD AM26LS33ACJ AM26LS33ACN AM26LS33AMFK	Line Receiver Line Receiver Line Receiver Line Receiver	6-4 6-4 6-4 6-4	SLYD002 SLYD002 SLYD002 SLYD002
AM26LS33AMJ AM26S10CD AM26S10CJ AM26S10CN	Line Receiver Bus Transceiver Bus Transceiver Bus Transceiver	6-4 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
AM26S11CD AM26S11CJ AM26S11CN DS3680D	Bus Transceiver Bus Transceiver Bus Transceiver Telephone Relay Driver	6-5 6-5 6-5 6-10,9-5	SLYD002 SLYD002 SLYD002 SLYD002
DS3680J DS3680N DS7831FK DS7831J	Telephone Relay Driver Telephone Relay Driver Quad Transceiver Quad Transceiver	6-10,9-5 6-10,9-5 — —	SLYD002 SLYD002 LCC5921 LCC5921
DS7831W DS7832FK DS7832J DS7832W	Quad Transceiver Quad Transceiver Quad Transceiver Quad Transceiver	— — — —	LCC5921 LCC5921 LCC5921 LCC5921
HCPL2502 HCPL2601 HCPL2630 JANTXV4N22	Optocoupler Optocoupler Optocoupler Optocoupler	8-5 8-6 8-6 —	SOYD002 SOYD002 SOYD002 SOYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
JANTXV4N23 JANTXV4N24 JANTXV4N47 JANTXV4N48	Optocoupler Optocoupler Optocoupler Optocoupler	— — — —	SOYD002 SOYD002 SOYD002 SOYD002
JANTXV4N49 JANTX4N22 JANTX4N23 JANTX4N24	Optocoupler Optocoupler Optocoupler Optocoupler	— — — —	SOYD002 SOYD002 SOYD002 SOYD002
JANTX4N47 JANTX4N48 JANTX4N49 JAN4N22	Optocoupler Optocoupler Optocoupler Optocoupler	— — — —	SOYD002 SOYD002 SOYD002 SOYD002
JAN4N23 JAN4N24 JAN4N47 JAN4N48	Optocoupler Optocoupler Optocoupler Optocoupler	— — — —	SOYD002 SOYD002 SOYD002 SOYD002
JAN4N49 JBP18S030J JBP24S10J JBP28L22J	Optocoupler 256 Bits PROM with 3-State Outputs Standard & Low Power PROM Low Power PROM with 3-State Outputs	— — — —	SOYD002 SDZD001B SDZD001B SDZD001B
JBP28L42J JBP28L86AJ JBP28S42J JBP38L165JT	Low Power PROM with 3-State Outputs Low Power PROM with 3-State Outputs Low Power PROM with 3-State Outputs Low Power PROM with 3-State Outputs	— — — —	SDZD001B SDZD001B SDZD001B SDZD001B
JBP38L167FK JBP38S165JT JBP38S167FK LF347BN	Low Power PROM with 3-State Outputs Standard PROM with 3-State Outputs Standard PROM with 3-State Outputs Operational Amplifier	— — — 7-9	SDZD001B SDZD001B SDZD001B SLOS013
LF347D LF347N LF351D LF351P	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-4 7-4	SLOS013 SLOS013 SLOS014 SLOS014
LF353D LF353P LF411CD LF411CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-4 7-4	SLOS012 SLOS012 SLOS011 SLOS011
LF412CD LF412CP LM124FK LM124J	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 — —	SLOS010 SLOS010 SLYD001 SLYD001
LM124W LM139AFK LM139AJ LM139AW	Operational Amplifier Voltage Comparator Voltage Comparator Voltage Comparator	— — — —	SLYD001 SLYD001 SLYD001 SLYD001
LM139FK LM139J LM139W LM148FK	Voltage Comparator Voltage Comparator Voltage Comparator Operational Amplifier	— — — —	SLYD001 SLYD001 SLYD001 SLYD001
LM148J LM158FK LM158JG LM193FK	Operational Amplifier Operational Amplifier Operational Amplifier Voltage Comparator	— — — —	SLYD001 SLYD001 SLYD001 SLYD001
LM193JG LM201AJG LM201AP LM206D	Voltage Comparator Operational Amplifier Operational Amplifier Voltage Comparator	— 7-2 7-2 7-11	SLYD001 SLYD001 SLYD001 SLYD001
LM206J LM206JG LM206N LM206P	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-11 7-11 7-11 7-11	SLYD001 SLYD001 SLYD001 SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
LM207D	Operational Amplifier	7-3	SLYD001
LM207J	Operational Amplifier	7-3	SLYD001
LM207JG	Operational Amplifier	7-3	SLYD001
LM207N	Operational Amplifier	7-3	SLYD001
LM207P	Operational Amplifier	7-3	SLYD001
LM208D	Operational Amplifier	7-2	SLYD001
LM208JG	Operational Amplifier	7-2	SLYD001
LM208P	Operational Amplifier	7-2	SLYD001
LM210JG	Operational Amplifier	7-3	SLYD001
LM210P	Operational Amplifier	7-3	SLYD001
LM211D	Voltage Comparator	7-11	SLYD001
LM211JG	Voltage Comparator	7-11	SLYD001
LM211P	Voltage Comparator	7-11	SLYD001
LM218D	Operational Amplifier	7-3	SLYD001
LM218JG	Operational Amplifier	7-3	SLYD001
LM218P	Operational Amplifier	7-3	SLYD001
LM224D	Operational Amplifier	7-8	SLYD001
LM224J	Operational Amplifier	7-8	SLYD001
LM224N	Operational Amplifier	7-8	SLYD001
LM239AD	Voltage Comparator	7-11	SLYD001
LM239AJ	Voltage Comparator	7-11	SLYD001
LM239AN	Voltage Comparator	7-11	SLYD001
LM239D	Voltage Comparator	7-11	SLYD001
LM239J	Voltage Comparator	7-11	SLYD001
LM239N	Voltage Comparator	7-11	SLYD001
LM248D	Operational Amplifier	7-8	SLYD001
LM248J	Operational Amplifier	7-8	SLYD001
LM248N	Operational Amplifier	7-8	SLYD001
LM258D	Operational Amplifier	7-6	SLYD001
LM258JG	Operational Amplifier	7-6	SLYD001
LM258P	Operational Amplifier	7-6	SLYD001
LM293AD	Voltage Comparator	7-11	SLYD001
LM293AJG	Voltage Comparator	7-11	SLYD001
LM293AP	Voltage Comparator	7-11	SLYD001
LM293D	Voltage Comparator	7-11	SLYD001
LM293JG	Voltage Comparator	7-11	SLYD001
LM293P	Voltage Comparator	7-11	SLYD001
LM301AD	Operational Amplifier	7-2	SLYD001
LM301AJG	Operational Amplifier	7-2	SLYD001
LM301AP	Operational Amplifier	7-2	SLYD001
LM306D	Voltage Comparator	7-12	SLYD001
LM306J	Voltage Comparator	7-12	SLYD001
LM306JN	Voltage Comparator	7-12	SLYD001
LM306N	Voltage Comparator	7-12	SLYD001
LM306P	Voltage Comparator	7-12	SLYD001
LM307D	Operational Amplifier	7-4	SLYD001
LM307JG	Operational Amplifier	7-4	SLYD001
LM307P	Operational Amplifier	7-4	SLYD001
LM308	Operational Amplifier	7-2	SLYD001
LM310JG	Operational Amplifier	7-4	SLYD001
LM310P	Operational Amplifier	7-4	SLYD001
LM311D	Voltage Comparator	7-12	SLYD001
LM311JG	Voltage Comparator	7-12	SLYD001
LM311P	Voltage Comparator	7-12	SLYD001
LM317KC	Voltage Regulator	7-16	SLYD001
LM318D	Operational Amplifier	7-4	SLYD001
LM318JG	Operational Amplifier	7-4	SLYD001
LM318P	Operational Amplifier	7-4	SLYD001
LM324AD	Operational Amplifier	7-9	SLYD001
LM324AJ	Operational Amplifier	7-9	SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
LM324AN	Operational Amplifier	7-9	SLYD001
LM324D	Operational Amplifier	7-9	SLYD001
LM324J	Operational Amplifier	7-9	SLYD001
LM324N	Operational Amplifier	7-9	SLYD001
LM324W	Operational Amplifier	7-9	SLYD001
LM330-5KC	Voltage Regulator	7-17	SLYD001
LM337KC	Voltage Regulator	7-16	SLYD001
LM339AD	Voltage Comparator	7-12	SLYD001
LM339AJ	Voltage Comparator	7-12	SLYD001
LM339AN	Voltage Comparator	7-12	SLYD001
LM339D	Voltage Comparator	7-12	SLYD001
LM339J	Voltage Comparator	7-12	SLYD001
LM339N	Voltage Comparator	7-12	SLYD001
LM340-5KC	Voltage Regulator	7-17	SLYD001
LM340-12KC	Voltage Regulator	7-17	SLYD001
LM340-15KC	Voltage Regulator	7-17	SLYD001
LM348D	Operational Amplifier	7-9	SLYD001
LM348J	Operational Amplifier	7-9	SLYD001
LM348N	Operational Amplifier	7-9	SLYD001
LM358AD	Operational Amplifier	7-6	SLYD001
LM358AP	Operational Amplifier	7-6	SLYD001
LM358D	Operational Amplifier	7-6	SLYD001
LM358JG	Operational Amplifier	7-6	SLYD001
LM358P	Operational Amplifier	7-6	SLYD001
LM393AD	Voltage Comparator	7-12	SLYD001
LM393AP	Voltage Comparator	7-12	SLYD001
LM393D	Voltage Comparator	7-12	SLYD001
LM393JG	Voltage Comparator	7-12	SLYD001
LM393P	Voltage Comparator	7-12	SLYD001
LM2900D	Operational Amplifier	7-8	SLYD001
LM2900J	Operational Amplifier	7-8	SLYD001
LM2900N	Operational Amplifier	7-8	SLYD001
LM2901D	Voltage Comparator	7-11	SLYD001
LM2901J	Voltage Comparator	7-11	SLYD001
LM2901N	Voltage Comparator	7-11	SLYD001
LM2902D	Operational Amplifier	7-8	SLYD001
LM2902J	Operational Amplifier	7-8	SLYD001
LM2902N	Operational Amplifier	7-8	SLYD001
LM2903D	Voltage Comparator	7-11	SLYD001
LM2903JG	Voltage Comparator	7-11	SLYD001
LM2903P	Voltage Comparator	7-11	SLYD001
LM2904D	Operational Amplifier	7-5	SLYD001
LM2904JG	Operational Amplifier	7-5	SLYD001
LM2904P	Operational Amplifier	7-5	SLYD001
LM2907D8	Frequency-to-Voltage Converter	7-21	SLFS011
LM2907D14	Frequency-to-Voltage Converter	7-21	SLFS011
LM2907N	Frequency-to-Voltage Converter	7-21	SLFS011
LM2907P	Frequency-to-Voltage Converter	7-21	SLFS011
LM2917D8	Frequency-to-Voltage Converter	7-21	SLFS011
LM2917D14	Frequency-to-Voltage Converter	7-21	SLFS011
LM2917N	Frequency-to-Voltage Converter	7-21	SLFS011
LM2917P	Frequency-to-Voltage Converter	7-21	SLFS011
LM2930-5KC	Voltage Regulator	7-17	SLYD001
LM2930-8KC	Voltage Regulator	7-17	SLYD001
LM3302D	Voltage Comparator	7-11	SLYD001
LM3302J	Voltage Comparator	7-11	SLYD001
LM3302N	Voltage Comparator	7-11	SLYD001
LM3900D	Operational Amplifier	7-9	SLYD001
LM3900J	Operational Amplifier	7-9	SLYD001
LM3900N	Operational Amplifier	7-9	SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
LP111	Differential Comparator	—	SLCS003
LP211	Differential Comparator	7-11	SLCS003
LP239D	Differential Comparator	7-11	SLCS004
LP239J	Differential Comparator	7-11	SLCS004
LP239JG	Differential Comparator	7-11	SLCS004
LP239N	Differential Comparator	7-11	SLCS004
LP239P	Differential Comparator	7-11	SLCS004
LP311	Differential Comparator	7-12	SLCS003
LP339	Differential Comparator	7-12	SLCS004
LP2901	Differential Comparator	7-11	SLCS004
LS600	Phototransistor	8-7	SOYD002
LTC1044CD	Voltage Converter	7-18	SLAS013
LTC1044CL	Voltage Converter	7-18	SLAS013
LTC1044CP	Voltage Converter	7-18	SLAS013
LTC7660	Voltage Converter	7-18	SLAS013
LT1007AC	Operational Amplifier	7-4	SLOS017
LT1007CL	Operational Amplifier	7-4	SLOS017
LT1007CP	Operational Amplifier	7-4	SLOS017
LT1009CD	Voltage Reference, 2.5 V	7-16	SLVS013
LT1009CLD	Voltage Reference, 2.5 V	7-16	SLVS013
LT1009CLP	Voltage Reference, 2.5 V	7-16	SLVS013
LT1011ACL	Voltage Comparator	7-12	SLVS014
LT1011ACP	Voltage Comparator	7-12	SLVS014
LT1011CP	Voltage Comparator	7-12	SLVS014
LT1037ACL	Operational Amplifier	7-2,7-4	SLOS017
LT1037ACP	Operational Amplifier	7-2,7-4	SLOS017
LT1037CL	Operational Amplifier	7-2,7-4	SLOS017
LT1037CP	Operational Amplifier	7-2,7-4	SLOS017
LT1070CKJ	Switching Voltage Regulator	7-19	SLVS015
LT1070CKV	Switching Voltage Regulator	7-19	SLVS015
L293DNE	Motor Driver	6-10	SLYD002
L293NE	Motor Driver	6-10	SLYD002
L298KV	Motor Driver	6-10	SLRS011
MCT2	Optocoupler	8-4	SOYD002
MCT2E	Optocoupler	8-4	SOYD002
MC79L05ACD	Voltage Regulator	7-18	SLYD001
MC79L05ACLP	Voltage Regulator	7-18	SLYD001
MC79L05CD	Voltage Regulator	7-18	SLYD001
MC79L05CLP	Voltage Regulator	7-18	SLYD001
MC79L12ACD	Voltage Regulator	7-18	SLYD001
MC79L12ACLP	Voltage Regulator	7-18	SLYD001
MC79L12CD	Voltage Regulator	7-18	SLYD001
MC79L12CLP	Voltage Regulator	7-18	SLYD001
MC79L15ACD	Voltage Regulator	7-18	SLYD001
MC79L15ACLP	Voltage Regulator	7-18	SLYD001
MC79L15CD	Voltage Regulator	7-18	SLYD001
MC79L15CLP	Voltage Regulator	7-18	SLYD001
MC1445N	Video Amplifier	7-10	SLYD001
MC1458D	Operational Amplifier	7-6	SLYD001
MC1458JG	Operational Amplifier	7-6	SLYD001
MC1458P	Operational Amplifier	7-6	SLYD001
MC3303J	Operational Amplifier	7-8	SLYD001
MC3303N	Operational Amplifier	7-8	SLYD001
MC3403D	Operational Amplifier	7-9	SLYD001
MC3403J	Operational Amplifier	7-9	SLYD001
MC3403N	Operational Amplifier	7-9	SLYD001
MC3423D	Power Supply Monitor, Overvoltage	7-16	SLYD001
MC3423JG	Power Supply Monitor, Overvoltage	7-16	SLYD001
MC3423P	Power Supply Monitor, Overvoltage	7-16	SLYD001
MC3446D	Bus Transceiver	6-5	SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
MC3446J	Bus Transceiver	6-5	SLYD002
MC3446N	Bus Transceiver	6-5	SLYD002
MC3450D	Line Receiver	6-4	SLYD002
MC3450J	Line Receiver	6-4	SLYD002
MC3450N	Line Receiver	6-4	SLYD002
MC3452D	Line Receiver	6-4	SLYD002
MC3452J	Line Receiver	6-4	SLYD002
MC3452N	Line Receiver	6-4	SLYD002
MC3453D	Line Driver	6-2	SLYD002
MC3453J	Line Driver	6-2	SLYD002
MC3453N	Line Driver	6-2	SLYD002
MC3470N	Floppy Disk Read-Amplifier	7-10	SLYD001
MC3486D	Line Receiver	6-3	SLYD002
MC3486J	Line Receiver	6-3	SLYD002
MC3486N	Line Receiver	6-3	SLYD002
MC3487D	Line Driver	6-2	SLYD002
MC3487J	Line Driver	6-2	SLYD002
MC3487N	Line Driver	6-2	SLYD002
MC3503J	Operational Amplifier	—	SLYD001
MC3550FK	Line Receiver (SN55107)	—	SLLSO12*
MC3550J	Line Receiver (SN55107)	—	SLLSO12*
MC3552FK	Line Receiver (SN55108)	—	SLLSO12*
MC3552J	Line Receiver (SN55108)	—	SLLSO12*
MC3553FK	Line Driver (SN55110)	—	SLLSO12*
MC3553J	Line Driver (SN55110)	—	SLLSO12*
MC34060D	PWM Controller	7-19	SLYD001
MC34060N	PWM Controller	7-19	SLYD001
MOC3009	Optocoupler	8-6	SOYD002
MOC3010	Optocoupler	8-6	SOYD002
MOC3011	Optocoupler	8-6	SOYD002
MOC3012	Optocoupler	8-6	SOYD002
MOC3020	Optocoupler	8-6	SOYD002
MOC3021	Optocoupler	8-6	SOYD002
MOC3022	Optocoupler	8-6	SOYD002
MOC3023	Optocoupler	8-6	SOYD002
NE555D	Timer	7-20	SLYD001
NE555JG	Timer	7-20	SLYD001
NE555P	Timer	7-20	SLYD001
NE556D	Timer	7-20	SLYD001
NE556J	Timer	7-20	SLYD001
NE556N	Timer	7-20	SLYD001
NE592AD	Video Amplifier	7-10	SLYD001
NE592AN	Video Amplifier	7-10	SLYD001
NE592D	Video Amplifier	7-10	SLYD001
NE592N	Video Amplifier	7-10	SLYD001
NE5532AJG	Operational Amplifier	7-6	SLYD001
NE5532AP	Operational Amplifier	7-6	SLYD001
NE5532JG	Operational Amplifier	7-6	SLYD001
NE5532P	Operational Amplifier	7-6	SLYD001
NE5534AD	Operational Amplifier	7-4	SLYD001
NE5534AJG	Operational Amplifier	7-4	SLYD001
NE5534AP	Operational Amplifier	7-4	SLYD001
NE5534D	Operational Amplifier	7-4	SLYD001
NE5534JG	Operational Amplifier	7-4	SLYD001
NE5534P	Operational Amplifier	7-4	SLYD001
OPI8012	Optocoupler	8-6	SOYD002
OPI8013	Optocoupler	8-6	SOYD002
OPI8014	Optocoupler	8-6	SOYD002
OPI8015	Optocoupler	8-6	SOYD002
OP07CD	Operational Amplifier	7-4	SLYD001

\*Use TI Reference Document for Electrical Parameters.



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
OP07CP OP07DD OP07DP OP07ED	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
OP07EP OP27EL OP27EP OP27GP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLOS016 SLOS016 SLOS016
OP37E OP37GP PAL16L4AFK PAL16L4AJ	Operational Amplifier Operational Amplifier Field Programmable Logic Array Field Programmable Logic Array	7-2,7-4 7-2,7-4 — —	SLOS016 SLOS016 SDZD001B SDZD001B
PAL16L4AW PAL16L6AFK PAL16L6AJ PAL16L6AW	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	— — — —	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16L8ACFN PAL16L8ACN PAL16L8AFK PAL16L8AJ	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16L8AW PAL16L8A-2CFN PAL16L8A-2CN PAL16L8A-2FK	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16L8A-2J PAL16R4ACFN PAL16R4ACN PAL16R4A-2CFN	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16R4A-2CN PAL16R4A-2FK PAL16R4A-2J PAL16R6ACFN	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16R6ACN PAL16R6A-2CFN PAL16R6A-2CN PAL16R6A-2FK	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16R6A-2J PAL16R8ACFN PAL16R8ACN PAL16R8AJ	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16R8AFK PAL16R8AW PAL16R8A-2CFN PAL16R8A-2CN	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL16R8A-2FK PAL16R8A-2J PAL20L8ACFN PAL20L8ACNT	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL20R4ACFN PAL20R4ACNT PAL20R6ACFN PAL20R6ACNT	Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array Field Programmable Logic Array	3-35 3-35 3-35 3-35	SDZD001B SDZD001B SDZD001B SDZD001B
PAL20R8ACFN PAL20R8ACNT PBL3717ANE PC401	Field Programmable Logic Array Field Programmable Logic Array Motor Driver Image Sensor Evaluation Board	3-35 3-35 6-10 8-2	SDZD001B SDZD001B SLYD002 SOYD002
PC402 RC4136D RC4136J RC4136N	Image Sensor Evaluation Board Operational Amplifier Operational Amplifier Operational Amplifier	8-2 7-9 7-9 7-9	SOYD002 SLYD001 SLYD001 SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
RC4558D RC4558JG RC4558P RC4559P	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
RM4136FK RM4136J RTC/EVM7000C-1 RTCWS-ASIC1	Operational Amplifier Operational Amplifier TMS7000 Evaluation Module (EVM) Application Specific IC (ASIC) Design Workshop	7-8 7-8 4-28,4-29 12-4	SLYD001 SLYD001 SND001B SSRC007
RTCWS-AS888 RTCWS-FPL RTCWS-320DSP1 RTCWS-320DSP2	'AS888/890 Bit-Slice Design Workshop Field Programmable Logic (FPL) Design Workshop TMS320C1X DSP Design Workshop TMS320C2X DSP Design Workshop	12-5 12-5 12-4 12-4	SSRC007 SSRC007 SSRC007 SSRC007
RTCWS-34010 RTCWS-34061 RTCWS-380LAN1 RV4558D	TMS34010 Graphics System Processor Design Workshop TMS34061 Graphics System Design Workshop TMS380 IBM Token-Ring Network Design Workshop Operational Amplifier	12-5 12-5 4-25,12-4 7-5	SSRC007 SSRC007 SSRC007 SLYD001
RV4558JG RV4558P SA555D SA555P	Operational Amplifier Operational Amplifier Timer Timer	7-5 7-5 7-20 7-20	SLYD001 SLYD001 SLYD001 SLYD001
SA556D SA556J SE70CP160JD SE70CP162JD	Timer Timer Prototyping Device (TMS70C40A/20A) Prototyping Device (TMS70C42)	7-20 7-20 4-28,4-30 4-28,4-30	SLYD001 SLYD001 SND001B SND001B
SE555FK SE555JG SE556FK SE556J	Timer Timer Timer Timer	— — — —	SLYD001 SLYD001 SLNS008 SLNS008
SG2524J SG2524N SG2525A SG2527A	PWM Controller PWM Controller PWM Controller PWM Controller	7-19 7-19 7-19 7-19	SLYD001 SLYD001 SLYD001 SLYD001
SG3524D SG3524J SG3524N SG3525AJ	PWM Controller PWM Controller PWM Controller PWM Controller	7-19 7-19 7-19 7-19	SLYD001 SLYD001 SLYD001 SLYD001
SG3525AN SG3527AN SMJ27C128J SMJ27C256J	PWM Controller PWM Controller CMOS Erasable PROM CMOS Erasable PROM	7-19 7-19 — —	SLYD001 SLYD001 SGMS006A SGMS005A
SMJ4161JD SMJ4164FG SMJ4164JD SMJ4256JD	65,536-Bit Multiport Video RAM 54,536-Bit Dynamic RAM 54,536-Bit Dynamic RAM 262,144-Bit Dynamic RAM	— — — —	SMYD006 SMYD006 SMYD006 SGMS256A
SMJ4416JD SMJ4464JD SMJ9914AJD SMJ32010FD	16,384-Word by 4-Bit Dynamic RAM 65,356-Word by 4-Bit Dynamic RAM GPIB Controller CMOS 1st-Generation DSP (20 MHz)	— — — 4-5	SMYD006 SGMS020 SGMS007 SPRS009
SMJ32010JD SMJ32020FJ SMJ32020GB SN54ALS00AJ	CMOS 1st-Generation DSP (20 MHz) NMOS 2nd-Generation DSP (20 MHz) NMOS 2nd-Generation DSP (20 MHz) Quad 2-Input NAND Gate	4-5 4-5 4-5 3-4	SPRS009 SPRS010 SPRS010 SDAD001B
SN54ALS00AW SN54ALS00FK SN54ALS01FK SN54ALS01J	Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate OC Quad 2-Input NAND Gate OC	3-4 3-4 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS02FK SN54ALS02J SN54ALS02W SN54ALS03BD	Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NAND Gate OC	3-6 3-6 3-6 3-5	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54ALS03BFK SN54ALS03BJ SN54ALS04BFK SN54ALS04BJ	Quad 2-Input NAND Gate OC Quad 2-Input NAND Gate OC Hex Inverter Hex Inverter	3-5 3-5 3-9 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS04BW SN54ALS05AFK SN54ALS05AJ SN54ALS08FK	Hex Inverter Hex Inverter OC Hex Inverter OC Quad 2-Input AND Gate	3-9 3-9 3-9 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS08J SN54ALS08W SN54ALS09FK SN54ALS09J	Quad 2-Input AND Gate Quad 2-Input AND Gate Quad 2-Input AND Gate OC Quad 2-Input AND Gate OC	3-5 3-5 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS10AFK SN54ALS10AJ SN54ALS10AW SN54ALS11AFK	Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input AND Gate	3-4 3-4 3-4 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS11AJ SN54ALS11AW SN54ALS12AFK SN54ALS12AJ	Triple 3-Input AND Gate Triple 3-Input AND Gate Triple 3-Input NAND Gate OC Triple 3-Input NAND Gate OC	3-5 3-5 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS15AJ SN54ALS20AFK SN54ALS20AJ SN54ALS20AW	Triple 3-Input AND Gate OC Dual 4-Input NAND Gate Dual 4-Input NAND Gate Dual 4-Input NAND Gate	3-5 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS21AFK SN54ALS21AJ SN54ALS21AW SN54ALS22BFK	Dual 4-Input AND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate Dual 4-Input NAND Gate OC	3-5 3-5 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS22BJ SN54ALS22BN SN54ALS27FK SN54ALS27J	Dual 4-Input NAND Gate OC Dual 4-Input NAND Gate OC Triple 3-Input NOR Gate Triple 3-Input NOR Gate	3-5 3-5 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS27W SN54ALS28AFK SN54ALS28AJ SN54ALS30AFK	Triple 3-Input NOR Gate Quad 2-Input NOR Buffer Quad 2-Input NOR Buffer 8-Input NAND Gate	3-6 3-6 3-6 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS30AJ SN54ALS30AW SN54ALS32FK SN54ALS32J	8-Input NAND Gate 8-Input NAND Gate Quad 2-Input OR Gate Quad 2-Input OR Gate	3-4 3-4 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS32W SN54ALS33AFK SN54ALS33AJ SN54ALS37AFK	Quad 2-Input OR Gate Quad 2-Input NOR Buffer Quad 2-Input NOR Buffer Quad 2-Input NAND Buffer	3-6 3-6 3-6 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS37AJ SN54ALS37AW SN54ALS38AFK SN54ALS38AJ	Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer	3-4 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS38AW SN54ALS74AFK SN54ALS74AJ SN54ALS74AW	Quad 2-Input NAND Buffer Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual D-Type Flip-Flop	3-4 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS109AFK SN54ALS109AJ SN54ALS112AFK SN54ALS112AJ	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS112AW SN54ALS113AFK SN54ALS113AJ SN54ALS114AFK	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54ALS133FK SN54ALS133J SN54ALS133W SN54ALS138FK	13-Input NAND Gate 13-Input NAND Gate 13-Input NAND Gate 3-8 Line Decoder/Demultiplexer	3-4 3-4 3-4 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS138J SN54ALS138W SN54ALS139FK SN54ALS139J	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS139W SN54ALS151FK SN54ALS151J SN54ALS151W	Dual 2-4 Decoder/Demultiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer	3-30 3-29 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS153FK SN54ALS153J SN54ALS153W SN54ALS157FK	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS157J SN54ALS157W SN54ALS158FK SN54ALS158J	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS158W SN54ALS161BFK SN54ALS161BJ SN54ALS161BW	Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-28 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS162BFK SN54ALS162BJ SN54ALS162BW SN54ALS163BFK	4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS163BJ SN54ALS169BFK SN54ALS169BJ SN54ALS169BW	4-Bit Synchronous Binary Counter 4-Bit Up/Down Synchronous Binary Counter 4-Bit Up/Down Synchronous Binary Counter 4-Bit Up/Down Synchronous Binary Counter	3-25 3-26 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS174FK SN54ALS174J SN54ALS174W SN54ALS175FK	Hex D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS175J SN54ALS175W SN54ALS191FK SN54ALS191J	Quad D-Type Flip-Flop Quad D-Type Flip-Flop Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter	3-18 3-18 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS191W SN54ALS193FK SN54ALS193J SN54ALS240AFK	Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Octal Buffer/Line Driver	3-26 3-26 3-26 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS240AJ SN54ALS240AW SN54ALS241AFK SN54ALS241AJ	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS241AW SN54ALS242BFK SN54ALS242BJ SN54ALS243AFK	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-12 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS243AJ SN54ALS243AW SN54ALS244AFK SN54ALS244AJ	Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-13 3-13 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS244AW SN54ALS245AFK SN54ALS245AJ SN54ALS245AW	Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-12 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54ALS251FK SN54ALS251J SN54ALS251W SN54ALS253FK	8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 4-1 Data Selector/Multiplexer	3-29 3-29 3-29 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS253J SN54ALS253W SN54ALS257FK SN54ALS257J	4-1 Data Selector/Multiplexer 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS257W SN54ALS258FK SN54ALS258J SN54ALS258W	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS259FK SN54ALS259J SN54ALS273FK SN54ALS273J	8-Bit Addressable Latch 8-Bit Addressable Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS273W SN54ALS299FK SN54ALS299J SN54ALS299W	Octal D-Type Flip-Flop 8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register	3-18 3-22 3-22 3-22	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS323FK SN54ALS323J SN54ALS352J SN54ALS353FK	8-Bit Shift/Storage Register 8-Bit Shift/Storage Register Dual Data Selector/Multiplexer Dual 4-1 Selector/Multiplexer	3-22 3-22 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS353J SN54ALS373FK SN54ALS373J SN54ALS373W	Dual 4-1 Selector/Multiplexer Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch	3-28 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS374FK SN54ALS374J SN54ALS374W SN54ALS520FK	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop 8-Bit Identity Comparator	3-18 3-18 3-18 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS520J SN54ALS534FK SN54ALS534J SN54ALS534W	8-Bit Identity Comparator Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-32 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS541FK SN54ALS541J SN54ALS563AFK SN54ALS563AJ	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal D-Type Transparent Latch Octal D-Type Transparent Latch	3-12 3-12 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS564AFK SN54ALS564AJ SN54ALS569AFK SN54ALS569AJ	Octal Edge-Triggered Flip-Flop Octal Edge-Triggered Flip-Flop 4-Bit Up/Down Binary Counter 4-Bit Up/Down Binary Counter	3-19 3-19 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS569AW SN54ALS573BFB SN54ALS573BJ SN54ALS574AFK	4-Bit Up/Down Binary Counter Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-26 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS574AJ SN54ALS574AW SN54ALS576AFK SN54ALS576AJ	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-18 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS580AFK SN54ALS580AJ SN54ALS580AW SN54ALS632AJD	Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch Error Detection and Correction Circuit	3-21 3-21 3-21 3-33	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS640AFK SN54ALS640AJ SN54ALS640AW SN54ALS645AFK	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-13 3-15	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54ALS645AJ SN54ALS688FK SN54ALS688J SN54ALS804AFK	Octal Bus Transceiver 8-Bit Identity Comparator 8-Bit Identity Comparator Hex 2-Input NAND Driver	3-15 3-32 3-32 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS805AJ SN54ALS808FK SN54ALS832J SN54ALS857FK	Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input OR Driver Hex 2-to-1 Multiplexer	3-6 3-10 3-6 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS857JT SN54ALS873BFK SN54ALS873BJT SN54ALS874BFK	Hex 2-to-1 Multiplexer Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Flip-Flop	3-29 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS874BJT SN54ALS1010AFK SN54ALS1010AJ SN54ALS1034FK	Dual 4-Bit D-Type Flip-Flop Triple 3-Input NAND Buffer Triple 3-Input NAND Buffer Triple 3-Input AND Buffer	3-18 3-4 3-4 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS1034J SN54ALS1035FK SN54ALS1035J SN54ALS1244AFK	Triple 3-Input AND Buffer Hex Noninverting Buffer Hex Noninverting Buffer Octal Buffer/Driver	3-10 3-10 3-10 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54ALS1244AJ SN54ALS1245AFK SN54ALS1245AJ SN54AS00FK	Octal Buffer/Driver Octal Bus Transceiver Octal Bus Transceiver Quad 2-Input NAND Gate	3-12 3-14 3-14 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS00J SN54AS02FK SN54AS02J SN54AS02W	Quad 2-Input NAND Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate	3-4 3-6 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS04FK SN54AS04J SN54AS04W SN54AS08FK	Hex Inverter Hex Inverter Hex Inverter Quad 2-Input AND Gate	3-9 3-9 3-9 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS08J SN54AS08WD SN54AS10FK SN54AS10J	Quad 2-Input AND Gate Quad 2-Input AND Gate Triple 3-Input NAND Gate Triple 3-Input NAND Gate	3-5 3-5 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS10W SN54AS11J SN54AS20J SN54AS21FK	Triple 3-Input NAND Gate Triple 3-Input AND Gate Dual 4-Input NAND Gate Dual 4-Input AND Gate	3-4 3-5 3-4 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS21J SN54AS27FK SN54AS27J SN54AS30FK	Dual 4-Input AND Gate Triple 3-Input NOR Gate Triple 3-Input NOR Gate 8-Input NAND Gate	3-5 3-6 3-6 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS30J SN54AS32FK SN54AS32J SN54AS32W	8-Input NAND Gate Quad 2-Input OR Gate Quad 2-Input OR Gate Quad 2-Input OR Gate	3-4 3-6 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS74FK SN54AS74J SN54AS74W SN54AS109FK	Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS109J SN54AS109W SN54AS138FK SN54AS138J	Dual J-K Flip-Flop Dual J-K Flip-Flop 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-17 3-17 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS138W SN54AS161FK SN54AS161J SN54AS161W	3-8 Line Decoder/Demultiplexer 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-30 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54AS163FK SN54AS163J SN54AS174FK SN54AS174J	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter Hex D-Type Flip-Flop Hex D-Type Flip-Flop	3-25 3-25 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS174W SN54AS181BJT SN54AS181BW SN54AS194J	Hex D-Type Flip-Flop 4-Bit Arithmetic Logic Unit 4-Bit Arithmetic Logic Unit Universal Shift Register	3-18 3-34 3-34 3-22	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS194W SN54AS240J SN54AS240W SN54AS241J	Universal Shift Register Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-22 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS242FK SN54AS242J SN54AS242W SN54AS244FK	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-13 3-13 3-13 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS244J SN54AS244W SN54AS373FK SN54AS373J	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal D-Type Latch Octal D-Type Latch	3-12 3-12 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS373W SN54AS374FK SN54AS374J SN54AS374W	Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS573FK SN54AS573J SN54AS573W SN54AS574FK	Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-21 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS574J SN54AS574W SN54AS575FK SN54AS575JT	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS575W SN54AS576FK SN54AS576J SN54AS576W	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS640J SN54AS645FK SN54AS645J SN54AS645W	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS646FK SN54AS646JT SN54AS646W SN54AS651FK	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS651JT SN54AS652FK SN54AS652JT SN54AS652W	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS804BFK SN54AS804BJ SN54AS805BFK SN54AS805BJ	Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NOR Driver Hex 2-Input NOR Driver	3-4 3-4 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS805BW SN54AS808BFK SN54AS808BJ SN54AS821FK	Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input AND Driver 10-Bit Bus Interface Flip-Flop	3-6 3-10 3-10 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS821JT SN54AS821W SN54AS832BFK SN54AS832BJ	10-Bit Bus Interface Flip-Flop 10-Bit Bus Interface Flip-Flop Hex 2-Input OR Driver Hex 2-Input OR Driver	3-19 3-19 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54AS832BW SN54AS867FK SN54AS867JT SN54AS867W	Hex 2-Input OR Driver 8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter	3-6 3-26 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS869FK SN54AS869JT SN54AS873FK SN54AS873JT	8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch	3-26 3-26 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS873W SN54AS874FK SN54AS874JT SN54AS874W	Dual 4-Bit D-Type Latch Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop	3-21 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS885FK SN54AS885JT SN54AS885W SN54AS1004AFK	8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Magnitude Comparator Hex Inverting Driver	3-32 3-32 3-32 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS1004AJ SN54AS1004AW SN54AS1032AFK SN54AS1032AJ	Hex Inverting Driver Hex Inverting Driver Quad OR Buffer/Driver Quad OR Buffer/Driver	3-9 3-9 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN54AS1034AFK SN54AS1034AJ SN54AS1034AW SN54F00FK	Hex Driver Hex Driver Hex Driver Quad 2-Input-NAND Gate	3-10 3-10 3-10 3-4	SDAD001B SDAD001B SDAD001B SDFD001
SN54F00J SN54F02FK SN54F02J SN54F04FK	Quad 2-Input-NAND Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Hex Inverter	3-4 3-6 3-6 3-9	SDFD001 SDFD001 SDFD001 SDFD001
SN54F04J SN54F10FK SN54F10J SN54F27FK	Hex Inverter Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input NOR Gate	3-9 3-4 3-4 3-6	SDFD001 SDFD001 SDFD001 SDFD001
SN54F27J SN54F27W SN54F30FK SN54F30J	Triple 3-Input NOR Gate Triple 3-Input NOR Gate 8-Input NAND Gate 8-Input NAND Gate	3-6 3-6 3-4 3-4	SDFD001 SDFD001 SDFD001 SDFD001
SN54F36FK SN54F36J SN54F74FK SN54F74J	Quad 2-Input NOR Gate Quad 2-Input NOR Gate Dual D-Type Flip-Flop Dual D-Type Flip-Flop	3-6 3-6 3-17 3-17	SDFD001 SDFD001 SDFD001 SDFD001
SN54F153FK SN54F153J SN54F153W SN54F241FK	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Octal Buffer/Line Driver	3-28 3-28 3-28 3-12	SDFD001 SDFD001 SDFD001 SDFD001
SN54F241J SN54F241W SN54F244FK SN54F244J	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDFD001 SDFD001 SDFD001 SDFD001
SN54F518FK SN54F518J SN54F518W SN54F519FK	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDFD001 SDFD001 SDFD001 SDFD001
SN54F519J SN54F519W SN54F520FK SN54F520J	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDFD001 SDFD001 SDFD001 SDFD001
SN54F521FK SN54F521J SN54F521W SN54LS00FK	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator Quad 2-Input NAND Gate	3-32 3-32 3-32 3-4	SDFD001 SDFD001 SDFD001 SDDL001



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS00J	Quad 2-Input NAND Gate	3-4	SDLD001
SN54LS00W	Quad 2-Input NAND Gate	3-4	SDLD001
SN54LS01FK	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS01J	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS01W	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS02FK	Quad 2-Input NOR Gate	3-6	SDLD001
SN54LS02J	Quad 2-Input NOR Gate	3-6	SDLD001
SN54LS02W	Quad 2-Input NOR Gate	3-6	SDLD001
SN54LS03FK	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS03J	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS03W	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN54LS04FK	Hex Inverter	3-9	SDLD001
SN54LS04J	Hex Inverter	3-9	SDLD001
SN54LS04W	Hex Inverter	3-9	SDLD001
SN54LS05FK	Hex Inverter OC	3-9	SDLD001
SN54LS05J	Hex Inverter OC	3-9	SDLD001
SN54LS05W	Hex Inverter OC	3-9	SDLD001*
SN54LS08FK	Quad 2-Input AND Gate	3-5	SDLD001
SN54LS08J	Quad 2-Input AND Gate	3-5	SDLD001
SN54LS08W	Quad 2-Input AND Gate	3-5	SDLD001
SN54LS09FK	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54LS09J	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54LS09W	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54LS10FK	Triple 3-Input NAND Gate	3-4	SDLD001
SN54LS10J	Triple 3-Input NAND Gate	3-4	SDLD001
SN54LS10W	Triple 3-Input NAND Gate	3-4	SDLD001
SN54LS11FK	Triple 3-Input AND Gate	3-5	SDLD001
SN54LS11J	Triple 3-Input AND Gate	3-5	SDLD001
SN54LS11W	Triple 3-Input AND Gate	3-5	SDLD001
SN54LS12FK	Triple 3-Input NAND Gate OC	3-5	SDLD001
SN54LS12J	Triple 3-Input NAND Gate OC	3-5	SDLD001
SN54LS12W	Triple 3-Input NAND Gate OC	3-5	SDLD001
SN54LS13J	Dual NAND Schmitt-Trigger	3-4	SDLD001
SN54LS13W	Dual NAND Schmitt-Trigger	3-4	SDLD001
SN54LS14FK	Hex Schmitt-Trigger Inverter	3-9	SDLD001
SN54LS14J	Hex Schmitt-Trigger Inverter	3-9	SDLD001
SN54LS14W	Hex Schmitt-Trigger Inverter	3-9	SDLD001
SN54LS15J	Triple 3-Input AND Gate OC	3-5	SDLD001
SN54LS15W	Triple 3-Input AND Gate OC	3-5	SDLD001
SN54LS20FK	Dual 4-Input NAND Gate	3-4	SDLD001
SN54LS20J	Dual 4-Input NAND Gate	3-4	SDLD001
SN54LS20W	Dual 4-Input NAND Gate	3-4	SDLD001
SN54LS21FK	Dual 4-Input AND Gate	3-5	SDLD001
SN54LS21J	Dual 4-Input AND Gate	3-5	SDLD001
SN54LS21W	Dual 4-Input AND Gate	3-5	SDLD001
SN54LS22FK	Dual 4-Input NAND Gate	—	SDLD001
SN54LS22J	Dual 4-Input NAND Gate	—	SDLD001
SN54LS22W	Dual 4-Input NAND Gate	—	SDLD001
SN54LS26FK	Quad 2-Input NAND Gate	3-4	SDLD001
SN54LS26J	Quad 2-Input NAND Gate	3-4	SDLD001
SN54LS26W	Quad 2-Input NAND Gate	3-4	SDLD001
SN54LS27FK	Triple 3-Input NOR Gate	3-6	SDLD001
SN54LS27J	Triple 3-Input NOR Gate	3-6	SDLD001
SN54LS27W	Triple 3-Input NOR Gate	3-6	SDLD001
SN54LS28J	Quad 2-Input NOR Buffer	3-6	SDLD001
SN54LS28W	Quad 2-Input NOR Buffer	3-6	SDLD001
SN54LS30FK	8-Input NAND Gate	3-4	SDLD001
SN54LS30J	8-Input NAND Gate	3-4	SDLD001
SN54LS30W	8-Input NAND Gate	3-4	SDLD001
SN54LS32FK	Quad 2-Input OR Gate	3-6	SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS32J SN54LS32W SN54LS33J SN54LS33W	Quad 2-Input OR Gate Quad 2-Input OR Gate Quad 2-Input NOR Buffer OC Quad 2-Input NOR Buffer OC	3-6 3-6 3-6 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS37FK SN54LS37J SN54LS37W SN54LS38FK	Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer OC	3-4 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS38J SN54LS38W SN54LS40FK SN54LS40J	Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC Dual 4-Input NAND Buffer Dual 4-Input NAND Buffer	3-4 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS40W SN54LS42FK SN54LS42J SN54LS42W	Dual 4-Input NAND Buffer BCD-to-Decimal Decoder BCD-to-Decimal Decoder BCD-to-Decimal Decoder	3-4 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS47FK SN54LS47J SN54LS47W SN54LS48J	BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver	3-33 3-33 3-33 —	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS48W SN54LS49J SN54LS51FK SN54LS51J	BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver Dual AND/OR Invert Gate Dual AND/OR Invert Gate	— — 3-7 3-7	SDLD001 SDLD001 SDLD001* SDLD001
SN54LS51W SN54LS54FK SN54LS54J SN54LS54W	Dual AND/OR Invert Gate AND-OR-Invert Gate AND-OR-Invert Gate AND-OR-Invert Gate	3-7 3-7 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS63J SN54LS73AJ SN54LS73AW SN54LS74AFK	Hex Current-Sensing Gate Dual J-K Flip-Flop Dual J-K Flip-Flop Dual D-Type Flip-Flop	— 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS74AJ SN54LS74AW SN54LS75J SN54LS75W	Dual D-Type Flip-Flop Dual D-Type Flip-Flop 4-Bit Latch 4-Bit Latch	3-17 3-17 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS76AJ SN54LS76AW SN54LS78AJ SN54LS78AW	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS83AJ SN54LS83AW SN54LS85FK SN54LS85J	4-Bit Binary Adder 4-Bit Binary Adder 4-Bit Magnitude Comparator 4-Bit Magnitude Comparator	3-34 3-34 3-32 3-32	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS85W SN54LS86AFK SN54LS86AJ SN54LS86AW	4-Bit Magnitude Comparator Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate	3-32 3-7 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS90J SN54LS90W SN54LS91J SN54LS91W	Decade Counter Decade Counter 8-Bit Shift Register 8-Bit Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS92J SN54LS92W SN54LS93J SN54LS93W	Divide-by-12 Counter Divide-by-12 Counter 4-Bit Binary Counter 4-Bit Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS95BFBK SN54LS95BJ SN54LS95BW SN54LS96J	4-Bit Shift Register 4-Bit Shift Register 4-Bit Shift Register 5-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS96W	5-Bit Shift Register	3-22	SDLD001
SN54LS107AFK	Dual J-K Flip-Flop	3-17	SDLD001
SN54LS107AJ	Dual J-K Flip-Flop	3-17	SDLD001
SN54LS107AW	Dual J-K Flip-Flop	3-17	SDLD001*
SN54LS109AFK	Dual J-K Flip-Flop	3-17	SDLD001
SN54LS109AJ	Dual J-K Flip-Flop	3-17	SDLD001
SN54LS109AW	Dual J-K Flip-Flop	3-17	SDLD001
SN54LS122J	One Shot Multivibrator	3-20	SDLD001
SN54LS122W	One Shot Multivibrator	3-20	SDLD001
SN54LS123FK	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS123J	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS123W	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS125AFK	Quad 3-State Buffer	3-12	SDLD001
SN54LS125AJ	Quad 3-State Buffer	3-12	SDLD001
SN54LS125AW	Quad 3-State Buffer	3-12	SDLD001
SN54LS126AFK	Quad 3-State Buffer	3-12	SDLD001
SN54LS126AJ	Quad 3-State Buffer	3-12	SDLD001
SN54LS126AW	Quad 3-State Buffer	3-12	SDLD001
SN54LS132FK	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN54LS132J	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN54LS132W	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN54LS136FK	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS136J	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS136W	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS137FK	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS137J	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS137W	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS138FK	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS138J	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS138W	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN54LS139AFK	Dual 1-4 Decoder/Demultiplexer	3-30	SDLD001
SN54LS139AJ	Dual 1-4 Decoder/Demultiplexer	3-30	SDLD001
SN54LS139AW	Dual 1-4 Decoder/Demultiplexer	3-30	SDLD001
SN54LS145FK	BCD-to-Decimal Decoder/Driver	3-30	SDLD001
SN54LS145J	BCD-to-Decimal Decoder/Driver	3-30	SDLD001
SN54LS145W	BCD-to-Decimal Decoder/Driver	3-30	SDLD001
SN54LS147J	10-4 Line Encoder	3-29	SDLD001
SN54LS148FK	8-3 Line Encoder	3-29	SDLD001
SN54LS148J	8-3 Line Encoder	3-29	SDLD001
SN54LS148W	8-3 Line Encoder	3-29	SDLD001
SN54LS151FK	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN54LS151J	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN54LS151W	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN54LS153FK	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS153J	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS153W	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS155AJ	Dual 1-4 Decoder	3-30	SDLD001
SN54LS155AW	Dual 1-4 Decoder	3-30	SDLD001
SN54LS156FK	Dual 1-4 Decoder OC	3-30	SDLD001
SN54LS156J	Dual 1-4 Decoder OC	3-30	SDLD001
SN54LS156W	Dual 1-4 Decoder OC	3-30	SDLD001
SN54LS157FK	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS157J	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS157W	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS158FK	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS158J	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS158W	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS160AFK	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN54LS160AJ	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN54LS160AW	4-Bit Synchronous Decade Counter	3-25	SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS161AFK SN54LS161AJ SN54LS161AW SN54LS162AFK	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS162AJ SN54LS162AW SN54LS163AFK SN54LS163AJ	4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Binary Counter 4-Bit Binary Counter	3-25 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS163AW SN54LS164FK SN54LS164J SN54LS164W	4-Bit Binary Counter 8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register	3-25 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS165AFK SN54LS165AJ SN54LS165AW SN54LS166AFK	8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS166AJ SN54LS166AW SN54LS169BFK SN54LS169BJ	8-Bit Shift Register 8-Bit Shift Register 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-22 3-22 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS169BW SN54LS170J SN54LS170W SN54LS173AFK	4-Bit Synchronous Binary Counter 4-by-4 Register File 4-by-4 Register File Quad D-Type Register	3-26 3-23 3-23 3-24	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS173AJ SN54LS173AW SN54LS174FK SN54LS174J	Quad D-Type Register Quad D-Type Register Hex D-Type Flip-Flop Hex D-Type Flip-Flop	3-24 3-24 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS174W SN54LS175FK SN54LS175J SN54LS175W	Hex D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS181FK SN54LS181J SN54LS181W SN54LS183J	4-Bit ALU 4-Bit ALU 4-Bit ALU Dual Carry-Save Full Adder	3-34 3-34 3-34 —	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS183W SN54LS189AFK SN54LS189AJ SN54LS190FK	Dual Carry-Save Full Adder 64-Bit RAM Code Converter 64-Bit RAM Code Converter Synchronous Up/Down Decade Counter	— — — 3-25	SDLD001 SDZD001B SDZD001B SDLD001
SN54LS190J SN54LS190W SN54LS191FK SN54LS191J	Synchronous Up/Down Decade Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter	3-25 3-25 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS191W SN54LS192J SN54LS192W SN54LS193FK	Synchronous Up/Down Binary Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter	3-26 3-25 3-25 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS193J SN54LS193W SN54LS194AFK SN54LS194AJ	Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter 4-Bit Universal Shift Register 4-Bit Universal Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS194AW SN54LS195AFK SN54LS195AJ SN54LS195AW	4-Bit Universal Shift Register 4-Bit Shift Register 4-Bit Shift Register 4-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001* SDLD001 SDLD001
SN54LS196FK SN54LS196J SN54LS196W SN54LS197FK	4-Bit BCD Counter 4-Bit BCD Counter 4-Bit BCD Counter 4-Bit Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS197J	4-Bit Binary Counter	3-26	SDLD001
SN54LS197W	4-Bit Binary Counter	3-26	SDLD001
SN54LS219AFK	64-Bit RAM Code Converter	—	SDZD001B
SN54LS219AJ	64-Bit RAM Code Converter	—	SDZD001B
SN54LS221FK	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS221J	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS221W	Dual Monostable Multivibrator	3-20	SDLD001
SN54LS222FK	FIFO Memory 16 × 4	10-9	SDVD001*
SN54LS222J	FIFO Memory 16 × 4	10-9	SDVD001
SN54LS224FK	FIFO Memory 16 × 4	10-9	SDVD001*
SN54LS224J	FIFO Memory 16 × 4	10-9	SDVD001
SN54LS240FK	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS240J	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS240W	Octal Buffer/Line Driver	3-12	SDLD001*
SN54LS241FK	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS241J	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS241W	Octal Buffer/Line Driver	3-12	SDLD001*
SN54LS242FK	Octal Bus Transceiver	3-13	SDLD001
SN54LS242J	Octal Bus Transceiver	3-13	SDLD001
SN54LS242W	Octal Bus Transceiver	3-13	SDLD001
SN54LS243FK	Octal Bus Transceiver	3-13	SDLD001
SN54LS243J	Octal Bus Transceiver	3-13	SDLD001
SN54LS243W	Octal Bus Transceiver	3-13	SDLD001
SN54LS244FK	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS244J	Octal Buffer/Line Driver	3-12	SDLD001
SN54LS244W	Octal Buffer/Line Driver	3-12	SDLD001*
SN54LS245FK	Octal Bus Transceiver	3-13	SDLD001
SN54LS245J	Octal Bus Transceiver	3-13	SDLD001
SN54LS245W	Octal Bus Transceiver	3-13	SDLD001*
SN54LS247J	BCD-to-7-Segment Decoder	3-30	SDLD001
SN54LS248J	BCD-to-7-Segment Decoder	—	SDLD001
SN54LS249J	BCD-to-7-Segment Decoder	—	SDLD001
SN54LS251FK	8-Input Data Selector/Multiplexer	3-29	SDLD001
SN54LS251J	8-Input Data Selector/Multiplexer	3-29	SDLD001
SN54LS251W	8-Input Data Selector/Multiplexer	3-29	SDLD001
SN54LS253FK	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS253J	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS253W	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN54LS257BFBK	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS257BJ	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS257BW	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS258BFBK	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS258BJ	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS258BW	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN54LS259BFBK	8-Bit Addressable Latch	3-21	SDLD001
SN54LS259BJ	8-Bit Addressable Latch	3-21	SDLD001
SN54LS259BW	8-Bit Addressable Latch	3-21	SDLD001
SN54LS261J	2-Bit by 4-Bit Parallel Multiplexer	—	SDLD001
SN54LS261W	2-Bit by 4-Bit Parallel Multiplexer	—	SDLS001
SN54LS266FK	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS266J	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS266W	Quad Exclusive OR Gate OC	3-7	SDLD001
SN54LS273FK	Octal D-Type Flip-Flop	3-18	SDLD001
SN54LS273J	Octal D-Type Flip-Flop	3-18	SDLD001
SN54LS273W	Octal D-Type Flip-Flop	3-18	SDLD001
SN54LS279AFK	Quad Set/Reset Latch	3-20	SDLD001
SN54LS279AJ	Quad Set/Reset Latch	3-20	SDLD001
SN54LS279AW	Quad Set/Reset Latch	3-20	SDLD001
SN54LS280FK	9-Bit Parity Generator/Checker	3-33	SDLD001
SN54LS280J	9-Bit Parity Generator/Checker	3-33	SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS280W SN54LS283FK SN54LS283J SN54LS283W	9-Bit Parity Generator/Checker 4-Bit Full Adder 4-Bit Full Adder 4-Bit Full Adder	3-33 3-34 3-34 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS289AFK SN54LS289AJ SN54LS290J SN54LS290W	64-Bit RAM 64-Bit RAM Decade Counter Decade Counter	— — 3-26 3-26	SDZD001B SDZD001B SDLD001 SDLD001
SN54LS293J SN54LS293W SN54LS295BJ SN54LS295BW	4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Shift Register 4-Bit Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS298FK SN54LS298J SN54LS298W SN54LS299FK	Quad 2-Input Multiplexer Quad 2-Input Multiplexer Quad 2-Input Multiplexer 8-Bit Shift Register	3-28 3-28 3-28 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS299J SN54LS299W SN54LS319AFK SN54LS319AJ	8-Bit Shift Register 8-Bit Shift Register 64-Bit RAM 64-Bit RAM	3-22 3-22 — —	SDLD001 SDLD001 SDZD001B SDZD001B
SN54LS320J SN54LS320W SN54LS321J SN54LS322AJ	Crystal-Controlled Oscillator Crystal-Controlled Oscillator Crystal Controlled Oscillator 8-Bit Shift Register	— — 3-31 3-22	SDLD001 SDLD001* SDLD001 SDLD001
SN54LS322AW SN54LS323FK SN54LS323J SN54LS323W	8-Bit Shift Register 8-Bit Shift/Storage Register 8-Bit Shift/Storage Register 8-Bit Shift/Storage Register	3-22 3-22 3-22 3-22	SDLD001* SDLD001 SDLD001 SDLD001*
SN54LS347J SN54LS348FK SN54LS348J SN54LS348W	BCD-to-7-Segment Decoder 8-3 Line Encoder 8-3 Line Encoder 8-3 Line Encoder	— 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS352J SN54LS352W SN54LS353FK SN54LS353J	Dual Data Selector/Multiplexer Dual Data Selector/Multiplexer Dual Data Selector/Multiplexer Dual Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS353W SN54LS356FK SN54LS356J SN54LS365AFK	Dual Data Selector/Multiplexer 8-1 Selector/Multiplexer Register 8-1 Selector/Multiplexer Register Hex Bus Driver	3-28 3-24 3-24 3-10	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS365AJ SN54LS365AW SN54LS366AFK SN54LS366AJ	Hex Bus Driver Hex Bus Driver Hex Bus Driver Hex Bus Driver	3-10 3-10 3-10 3-10	SDLD001 SDLD001* SDLD001 SDLD001
SN54LS366AW SN54LS367AFK SN54LS367AJ SN54LS367AW	Hex Bus Driver Hex Bus Driver Hex Bus Driver Hex Bus Driver	3-10 3-10 3-10 3-10	SDLD001* SDLD001 SDLD001 SDLD001*
SN54LS368AFK SN54LS368AJ SN54LS368AW SN54LS373FK	Hex Bus Driver Hex Bus Driver Hex Bus Driver Octal D-Type Latch	3-10 3-10 3-10 3-21	SDLD001 SDLD001 SDLD001* SDLD001
SN54LS373J SN54LS373W SN54LS374FK SN54LS374J	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SDLD001 SDLD001* SDLD001 SDLD001
SN54LS374W SN54LS375FK SN54LS375J SN54LS375W	Octal D-Type Flip-Flop 4-Bit Bistable Latch 4-Bit Bistable Latch 4-Bit Bistable Latch	3-18 3-20 3-20 3-20	SDLD001* SDLD001 SDLD001 SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS377FK SN54LS377J SN54LS377W SN54LS378FK	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Hex D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS378J SN54LS378W SN54LS379FK SN54LS379J	Hex D-Type Flip-Flop Hex D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS379W SN54LS381AFK SN54LS381AJ SN54LS382J	Quad D-Type Flip-Flop ALU/Function Generator ALU/Function Generator ALU/Function Generator	3-18 3-34 3-34 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS385FK SN54LS385J SN54LS386AJ SN54LS386AW	Quad Serial Adder/Subtractor Quad Serial Adder/Subtractor Quad 2-Input Exclusive-OR Gate Quad 2-Input Exclusive-OR Gate	— — — —	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS390FK SN54LS390J SN54LS390W SN54LS393FK	4-Bit Decade Counter 4-Bit Decade Counter 4-Bit Decade Counter 4-Bit Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS393J SN54LS393W SN54LS395AFK SN54LS395AJ	4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Cascadable Shift Register 4-Bit Cascadable Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS395AW SN54LS396J SN54LS398J SN54LS399FK	4-Bit Cascadable Shift Register Octal Storage Register Quad 2-Input Multiplexer with Storage Quad 2-Input Multiplexer with Storage	3-22 — — 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS399J SN54LS399W SN54LS442FK SN54LS442J	Quad 2-Input Multiplexer with Storage Quad 2-Input Multiplexer with Storage Bus Transceiver Bus Transceiver	3-28 3-28 3-13 3-13	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS490J SN54LS490W SN54LS540J SN54LS541FK	Dual 4-Bit Decade Counter Dual 4-Bit Decade Counter Octal Buffer/Line Driver Octal Buffer/Line Driver	— — 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS541J SN54LS590FK SN54LS590J SN54LS590W	Octal Buffer/Line Driver Binary Counter with Output Register Binary Counter with Output Register Binary Counter with Output Register	3-12 3-27 3-27 3-27	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS592FK SN54LS592J SN54LS592W SN54LS593FK	Binary Counter with Input Register Binary Counter with Input Register Binary Counter with Input Register Binary Counter with Input Register	3-27 3-27 3-27 3-27	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS593J SN54LS593W SN54LS595FK SN54LS595J	Binary Counter with Input Register Binary Counter with Input Register Shift Register with Output Latch Shift Register with Output Latch	3-27 3-27 3-23 3-23	SDLD001 SDLD001 SDLD001 SDLD001
SN54LS595W SN54LS597FK SN54LS597J SN54LS597W	Shift Register with Output Latch Shift Register with Input Latch Shift Register with Input Latch Shift Register with Input Latch	3-23 3-23 3-23 3-23	SDLD001 SDLD001 SDLD001 SDLD001*
SN54LS598FK SN54LS598J SN54LS598W SN54LS610JD	Shift Register with Input Latch Shift Register with Input Latch Shift Register with Input Latch Memory Mapper with Latch	3-23 3-23 3-23 3-31	SDLD001 SDLD001 SDLD001* SDLD001
SN54LS624FK SN54LS624J SN54LS624W SN54LS626J	Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator	3-31 3-31 3-31 —	SDLD001 SDLD001 SDLD001 SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54LS628J	Voltage-Controlled Oscillator	3-31	SDLD001
SN54LS629J	Voltage-Controlled Oscillator	3-31	SDLD001
SN54LS629W	Voltage-Controlled Oscillator	3-31	SDLD001
SN54LS630FK	Error Detection and Correction Circuit	3-33	SDLD001
SN54LS630JD	Error Detection and Correction Circuit	3-33	SDLD001
SN54LS640FK	Octal Bus Transceiver	3-13	SDLD001
SN54LS640J	Octal Bus Transceiver	3-13	SDLD001
SN54LS641J	Octal Bus Transceiver	3-11	SDLD001
SN54LS642FK	Octal Bus Transceiver	3-11	SDLD001
SN54LS642J	Octal Bus Transceiver	3-11	SDLD001
SN54LS644J	Octal Bus Transceiver	3-11	SDLD001
SN54LS645FK	Octal Bus Transceiver	3-15	SDLD001
SN54LS645J	Octal Bus Transceiver	3-15	SDLD001
SN54LS668J	4-Bit Up/Down Counter	—	SDLD001
SN54LS669FK	4-Bit Up/Down Counter	3-25	SDLD001
SN54LS669J	4-Bit Up/Down Counter	3-25	SDLD001
SN54LS670FK	4-by-4 Register File	3-23	SDLD001
SN54LS670J	4-by-4 Register File	3-23	SDLD001
SN54LS670W	4-by-4 Register File	3-23	SDLD001
SN54LS673FK	16-Bit Shift Register	—	SDLD001
SN54LS673J	16-Bit Shift Register	—	SDLD001
SN54LS673W	16-Bit Shift Register	—	SDLD001
SN54LS674FK	16-Bit Shift Register	3-22	SDLD001
SN54LS674J	16-Bit Shift Register	3-22	SDLD001
SN54LS674W	16-Bit Shift Register	3-22	SDLD001
SN54LS681FK	4-Bit Binary Accumulator	3-34	SDLD001
SN54LS681J	4-Bit Binary Accumulator	3-34	SDLD001
SN54LS682FK	8-Bit Identity Comparator	3-32	SDLD001
SN54LS682J	8-Bit Identity Comparator	3-32	SDLD001
SN54LS683J	8-Bit Identity Comparator	—	SDLS001
SN54LS684FK	8-Bit Identity Comparator	3-32	SDLD001
SN54LS684J	8-Bit Identity Comparator	3-32	SDLD001
SN54LS684W	8-Bit Identity Comparator	3-32	SDLD001
SN54LS685J	8-Bit Identity Comparator	—	SDLD001
SN54LS688FK	8-Bit Magnitude Comparator	3-32	SDLD001
SN54LS688J	8-Bit Magnitude Comparator	3-32	SDLD001
SN54LS689J	8-Bit Magnitude Comparator	—	SDLD001
SN54LS691FK	Synchronous Counter	—	SDLD001
SN54LS691J	Synchronous Counter	—	SDLD001
SN54LS693FK	Synchronous Counter	—	SDLD001
SN54LS693J	Synchronous Counter	—	SDLD001
SN54LS696J	Synchronous Counter	—	SDLD001
SN54LS697FK	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54LS697J	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54LS697W	Synchronous Up/Down Binary Counter	3-26	SDLD001*
SN54LS699FK	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54LS699J	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54S00FK	Quad 2-Input NAND Gate	3-4	SDLD001
SN54S00J	Quad 2-Input NAND Gate	3-4	SDLD001
SN54S00W	Quad 2-Input NAND Gate	3-4	SDLD001
SN54S02FK	Quad 2-Input NOR Gate	3-6	SDLD001
SN54S02J	Quad 2-Input NOR Gate	3-6	SDLD001
SN54S02W	Quad 2-Input NOR Gate	3-6	SDLD001
SN54S03FK	Quad 2-Input NAND Gate	3-5	SDLD001
SN54S03J	Quad 2-Input NAND Gate	3-5	SDLD001
SN54S03W	Quad 2-Input NAND Gate	3-5	SDLD001
SN54S04FK	Hex Inverter	3-9	SDLD001
SN54S04J	Hex Inverter	3-9	SDLD001
SN54S04W	Hex Inverter	3-9	SDLD001
SN54S05FK	Hex Inverter OC	3-9	SDLD001

\*Use TI Reference Document for Electrical Parameters.



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54S05J	Hex Inverter OC	3-9	SDLD001
SN54S05W	Hex Inverter OC	3-9	SDLD001*
SN54S08FK	Quad 2-Input AND Gate	3-5	SDLD001
SN54S08J	Quad 2-Input AND Gate	3-5	SDLD001
SN54S08W	Quad 2-Input AND Gate	3-5	SDLD001
SN54S09FK	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54S09J	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54S09W	Quad 2-Input AND Gate OC	3-5	SDLD001
SN54S10FK	Triple 3-Input NAND Gate	3-4	SDLD001
SN54S10J	Triple 3-Input NAND Gate	3-4	SDLD001
SN54S10W	Triple 3-Input NAND Gate	3-4	SDLD001
SN54S11FK	Triple 3-Input AND Gate	3-5	SDLD001
SN54S11J	Triple 3-Input AND Gate	3-5	SDLD001
SN54S11W	Triple 3-Input AND Gate	3-5	SDLD001
SN54S15FK	Triple 3-Input AND Gate OC	3-5	SDLD001
SN54S15J	Triple 3-Input AND Gate OC	3-5	SDLD001
SN54S15W	Triple 3-Input AND Gate OC	3-5	SDLD001
SN54S20FK	Dual 4-Input NAND Gate	3-4	SDLD001
SN54S20J	Dual 4-Input NAND Gate	3-4	SDLD001
SN54S20W	Dual 4-Input NAND Gate	3-4	SDLD001
SN54S30FK	8-Input NAND Gate	3-4	SDLD001
SN54S30J	8-Input NAND Gate	3-4	SDLD001
SN54S30W	8-Input NAND Gate	3-4	SDLD001
SN54S32FK	Quad 2-Input OR Gate	3-6	SDLD001
SN54S32J	Quad 2-Input OR Gate	3-6	SDLD001
SN54S32W	Quad 2-Input OR Gate	3-6	SDLD001
SN54S37FK	Quad 2-Input NAND Buffer	3-4	SDLD001
SN54S37J	Quad 2-Input NAND Buffer	3-4	SDLD001
SN54S37W	Quad 2-Input NAND Buffer	3-4	SDLD001
SN54S38FK	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN54S38J	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN54S38W	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN54S40FK	Dual 4-Input NAND Buffer	3-4	SDLD001
SN54S40J	Dual 4-Input NAND Buffer	3-4	SDLD001
SN54S40W	Dual 4-Input NAND Buffer	3-4	SDLD001
SN54S51FK	Dual AND-OR-Invert Gate	3-7	SDLD001*
SN54S51J	Dual AND-OR-Invert Gate	3-7	SDLD001
SN54S51W	Dual AND-OR-Invert Gate	3-7	SDLD001
SN54S64FK	AND-OR-Invert Gate	3-7	SDLD001
SN54S64J	AND-OR-Invert Gate	3-7	SDLD001
SN54S64W	AND-OR-Invert Gate	3-7	SDLD001
SN54S65FK	AND-OR-Invert Gate	3-7	SDLD001
SN54S65J	AND-OR-Invert Gate	3-7	SDLD001
SN54S65W	AND-OR-Invert Gate	3-7	SDLD001
SN54S74FK	Dual D-Type Flip-Flop	3-17	SDLD001
SN54S74J	Dual D-Type Flip-Flop	3-17	SDLD001
SN54S74W	Dual D-Type Flip-Flop	3-17	SDLD001
SN54S85FK	4-Bit Magnitude Comparator	3-32	SDLD001
SN54S85J	4-Bit Magnitude Comparator	3-32	SDLD001
SN54S85W	4-Bit Magnitude Comparator	3-32	SDLD001
SN54S86FK	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN54S86J	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN54S86W	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN54S112FK	Dual J-K Flip-Flop	3-17	SDLD001
SN54S112J	Dual J-K Flip-Flop	3-17	SDLD001
SN54S112W	Dual J-K Flip-Flop	3-17	SDLD001
SN54S113FK	Dual J-K Flip-Flop	3-17	SDLD001
SN54S113J	Dual J-K Flip-Flop	3-17	SDLD001
SN54S113W	Dual J-K Flip-Flop	3-17	SDLD001
SN54S114FK	Dual J-K Flip-Flop	3-17	SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54S114J SN54S114W SN54S132FK SN54S132J	Dual J-K Flip-Flop Dual J-K Flip-Flop Quad 2-Input NAND Schmitt Trigger Quad 2-Input NAND Schmitt Trigger	3-17 3-17 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN54S132W SN54S133FK SN54S133J SN54S133W	Quad 2-Input NAND Schmitt Trigger 13-Input NAND Gate 13-Input NAND Gate 13-Input NAND Gate	3-4 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN54S134J SN54S134W SN54S135J SN54S135W	12-Input NAND Gate 12-Input NAND Gate Quad Exclusive OR/NOR Gate Quad Exclusive OR/NOR Gate	3-4 3-4 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN54S138FK SN54S138J SN54S138W SN54S139FK	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN54S139J SN54S139W SN54S140FK SN54S140J	Dual 2-4 Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer Dual 50 Ohm Line Driver Dual 50 Ohm Line Driver	3-30 3-30 3-15 3-15	SDLD001 SDLD001 SDLD001 SDLD001
SN54S140W SN54S151FK SN54S151J SN54S151W	Dual 50 Ohm Line Driver 8-1 Data Select/Multiplexer 8-1 Data Select/Multiplexer 8-1 Data Select/Multiplexer	3-15 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN54S153FK SN54S153J SN54S153W SN54S157FK	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN54S157J SN54S157W SN54S158FK SN54S158J	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN54S158W SN54S162FK SN54S162J SN54S162W	Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter	3-28 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN54S163FK SN54S163J SN54S163W SN54S169FK	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-25 3-25 3-25 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54S169J SN54S169W SN54S174FK SN54S174J	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter Hex D-Type Flip-Flop Hex D-Type Flip-Flop	3-26 3-26 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54S174W SN54S175FK SN54S175J SN54S175W	Hex D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN54S181FK SN54S181J SN54S181W SN54S182FK	4-Bit ALU 4-Bit ALU 4-Bit ALU Look-Ahead Carry Generator	3-34 3-34 3-34 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN54S182J SN54S182W SN54S194FK SN54S194J	Look-Ahead Carry Generator Look-Ahead Carry Generator Universal Shift Register Universal Shift Register	3-34 3-34 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54S194W SN54S195FK SN54S195J SN54S195W	Universal Shift Register 4-Bit Shift Register 4-Bit Shift Register 4-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54S196FK SN54S196J SN54S197J SN54S197W	4-Bit BCD Counter 4-Bit BCD Counter 4-Bit Binary Counter 4-Bit Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN54S226J SN54S240FK SN54S240J SN54S240W	4-Bit Bus Transceiver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	— 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001*
SN54S241FK SN54S241J SN54S241W SN54S244FK	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001* SDLD001
SN54S244J SN54S244W SN54S251FK SN54S251J	Octal Buffer/Line Driver Octal Buffer/Line Driver 8-Bit Data Selector/Multiplexer 8-Bit Data Selector/Multiplexer	3-12 3-12 3-29 3-29	SDLD001 SDLD001* SDLD001 SDLD001
SN54S251W SN54S257FK SN54S257J SN54S257W	8-Bit Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer	3-29 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN54S258FK SN54S258J SN54S258W SN54S260FK	Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Dual 5-Input NOR Gate	3-28 3-28 3-28 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN54S260J SN54S260W SN54S280FK SN54S280J	Dual 5-Input NOR Gate Dual 5-Input NOR Gate 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker	3-6 3-6 3-33 3-33	SDLD001 SDLD001 SDLD001 SDLD001
SN54S280W SN54S283FK SN54S283J SN54S299FK	9-Bit Parity Generator/Checker 4-Bit Full Adder 4-Bit Full Adder 8-Bit Shift Register	3-33 3-34 3-34 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN54S299J SN54S373FK SN54S373J SN54S373W	8-Bit Shift Register Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch	3-22 3-21 3-21 3-21	SDLD001 SDLD001 SDLD001 SDLD001*
SN54S374FK SN54S374J SN54S374W SN54S381FK	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop ALU/Function Generator	3-18 3-18 3-18 3-34	SDLD001 SDLD001 SDLD001* SDLD001
SN54S381J SN5400J SN5400W SN5401J	ALU/Function Generator Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate OC	3-34 3-4 3-4 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN5401W SN5402J SN5402W SN5403J	Quad 2-Input NAND Gate OC Quad 2-Input NOR Gate Quad 2-Input NCR Gate Quad 2-Input NAND Gate OC	3-5 3-6 3-6 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN5403W SN5404J SN5404W SN5405J	Quad 2-Input NAND Gate OC Hex Inverter Hex Inverter Hex Inverter OC	3-5 3-9 3-9 3-9	SDLD001* SDLD001 SDLD001 SDLD001
SN5405W SN5406FK SN5406J SN5406W	Hex Inverter OC Hex Inverter OC Hex Inverter OC Hex Inverter OC	3-9 3-9 3-9 3-9	SDLD001 SDLD001* SDLD001 SDLD001
SN5407FK SN5407J SN5407W SN5408J	Hex Buffer OC Hex Buffer OC Hex Buffer OC Quad 2-Input AND Gate	3-10 3-10 3-10 3-5	SDLD001* SDLD001 SDLD001 SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN5408W	Quad 2-Input AND Gate	3-5	SDLD001
SN5409J	Quad 2-Input AND Gate OC	3-5	SDLD001
SN5410J	Triple 3-Input NAND Gate	3-4	SDLD001
SN5410W	Triple 3-Input NAND Gate	3-4	SDLD001
SN5412J	Triple 3-Input NAND Gate OC	3-5	SDLD001
SN5412W	Triple 3-Input NAND Gate OC	3-5	SDLD001
SN5413J	Dual NAND Schmitt-Trigger	3-4	SDLD001
SN5413W	Dual NAND Schmitt-Trigger	3-4	SDLD001
SN5414J	Hex Schmitt-Trigger	3-9	SDLD001
SN5414W	Hex Schmitt-Trigger	3-9	SDLD001
SN5416J	Hex Inverter/Driver	3-9	SDLD001
SN5416W	Hex Inverter/Driver	3-9	SDLD001
SN5417J	Hex Buffer/Driver OC	3-10	SDLD001
SN5420J	Dual 4-Input NAND Gate	3-4	SDLD001
SN5420W	Dual 4-Input NAND Gate	3-4	SDLD001
SN5422J	Dual 4-Input NAND Gate	3-5	SDLD001
SN5423J	Dual 4-Input NOR Gate	3-8	SDLD001
SN5423W	Dual 4-Input NOR Gate	3-8	SDLD001
SN5425J	Dual 4-Input NOR Gate	3-6	SDLD001
SN5425W	Dual 4-Input NOR Gate	3-6	SDLD001
SN5426J	Quad 2-Input NAND Gate	3-4	SDLD001
SN5427J	Triple 3-Input NOR Gate	3-6	SDLD001
SN5427W	Triple 3-Input NOR Gate	3-6	SDLD001
SN5428J	Quad 2-Input NOR Buffer	3-6	SDLD001
SN5428W	Quad 2-Input NOR Buffer	3-6	SDLD001
SN5430J	8-Input NAND Gate	3-4	SDLD001
SN5430W	8-Input NAND Gate	3-4	SDLD001
SN5432J	Quad 2-Input OR Gate	3-6	SDLD001
SN5432W	Quad 2-Input OR Gate	3-6	SDLD001
SN5433J	Quad 2-Input NOR Buffer OC	3-6	SDLD001
SN5433W	Quad 2-Input NOR Buffer OC	3-6	SDLD001
SN5437J	Quad 2-Input NAND Buffer	3-4	SDLD001
SN5437W	Quad 2-Input NAND Buffer	3-4	SDLD001
SN5438J	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN5438W	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN5440J	Dual 4-Input NAND Buffer	3-4	SDLD001
SN5440W	Dual 4-Input NAND Buffer	3-4	SDLD001*
SN5444AJ	4-Line to 10-Line Decoder	—	SDLD001
SN5444AW	4-Line to 10-Line Decoder	—	SDLD001*
SN5445J	BCD-to-Decimal Decoder/Driver	3-30	SDLD001
SN5445W	BCD-to-Decimal Decoder/Driver	3-30	SDLD001*
SN5446AJ	BCD-7-Segment Decoder/Driver	3-30	SDLD001
SN5446AW	BCD-7-Segment Decoder/Driver	3-30	SDLD001
SN5447AJ	BCD-7-Segment Decoder/Driver	3-30	SDLD001
SN5448J	BCD-7-Segment Decoder/Driver	—	SDLD001
SN5448W	BCD-7-Segment Decoder/Driver	—	SDLD001
SN5450J	Dual AND-OR-Invert Gate	3-8	SDLD001
SN5450W	Dual AND-OR-Invert Gate	3-8	SDLD001
SN5451J	Dual AND-OR-Invert Gate	3-7	SDLD001
SN5451W	Dual AND-OR-Invert Gate	3-7	SDLD001
SN5453J	Expandable 4-Wide AND-OR-Invert Gate	—	SDLD001
SN5453W	Expandable 4-Wide AND-OR-Invert Gate	—	SDLD001
SN5454J	AND-OR-Invert Gate	3-7	SDLD001
SN5454W	AND-OR-Invert Gate	3-7	SDLD001
SN5470J	AND-Gated J-K Flip-Flop	3-17	SDLD001
SN5470W	AND-Gated J-K Flip-Flop	3-17	SDLD001
SN5472J	Master-Slave Flip-Flop	—	SDLD001
SN5472W	Master-Slave Flip-Flop	—	SDLD001
SN5473J	Dual J-K Flip-Flop	3-17	SDLD001
SN5473W	Dual J-K Flip-Flop	3-17	SDLD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN5474J SN5474W SN5475J SN5475W	Dual D-Type Flip-Flop Dual D-Type Flip-Flop 4-Bit Latch 4-Bit Latch	3-17 3-17 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN5476J SN5477W SN5482J SN5482W	Dual J-K Flip-Flop 4-Bit Bistable Latch 2-Bit Binary Full Adder 2-Bit Binary Full Adder	3-17 — — —	SDLD001 SDLD001 SDLD001 SDLD001
SN5483AJ SN5483AW SN5485J SN5485W	4-Bit Binary Adder 4-Bit Binary Adder 4-Bit Magnitude Comparator 4-Bit Magnitude Comparator	3-34 3-34 3-32 3-32	SDLD001 SDLD001 SDLD001 SDLD001
SN5486J SN5486W SN5490AJ SN5490AW	Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Decade Binary Counter Decade Binary Counter	3-7 3-7 — —	SDLD001 SDLD001 SDLD001 SDLD001
SN5491AJ SN5491AW SN5492AJ SN5492AW	8-Bit Shift Register 8-Bit Shift Register Divide-by-12 Counter Divide-by-12 Counter	— — 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN5493AJ SN5493AW SN5494J SN5494W	4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Shift Register 4-Bit Shift Register	3-26 3-26 — —	SDLD001 SDLD001 SDLD001 SDLD001
SN5495AJ SN5495AW SN5496J SN5496W	4-Bit Shift Register 4-Bit Shift Register 5-Bit Shift Register 5-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN5497J SN54100J SN54100W SN54107J	Binary Rate Multiplier 8-Bit Bistable Latch 8-Bit Bistable Latch Dual J-K Flip-Flop	3-27 — — 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN54109J SN54109W SN54111J SN54116J	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Master-Slave Dual 4-Bit Latch	3-17 3-17 — 3-21	SDLD001 SDLD001 SDLD001 SDLD001
SN54116W SN54120J SN54121J SN54121W	Dual 4-Bit Latch Dual Pulse Synchronizer/Driver One-Shot Multivibrator One-Shot Multivibrator	3-21 3-16 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN54122J SN54123J SN54125J SN54125W	One-Shot Multivibrator Dual Monostable Multivibrator Quad 3-State Buffer Quad 3-State Buffer	3-20 3-20 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN54126J SN54126W SN54128J SN54128W	Quad 3-State Buffer Quad 3-State Buffer 50 Ohm Line Driver 50 Ohm Line Driver	3-12 3-12 3-16 3-16	SDLD001 SDLD001 SDLD001 SDLD001
SN54132J SN54136J SN54144J SN54147J	Quad 2-Input NAND Schmitt-Trigger Quad Exclusive OR Gate OC 4-Bit Counter/Latch/Driver 10-to-4 Line Encoder	3-4 3-7 — 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN54148J SN54148W SN54150J SN54150W	8-to-3 Line Encoder 8-to-3 Line Encoder Data Selector/Multiplexer Data Selector/Multiplexer	3-29 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN54151AJ SN54151AW SN54153J SN54153W	8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-29 3-29 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54154J	4-to-16 Line Decoder	3-30	SDLD001
SN54154W	4-to-16 Line Decoder	3-30	SDLD001
SN54155J	Dual 1-4 Decoder	3-30	SDLD001
SN54155W	Dual 1-4 Decoder	3-30	SDLD001
SN54156J	Dual 1-4 Decoder OC	3-30	SDLD001
SN54157J	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54157W	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN54160J	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN54161J	4-Bit Synchronous Binary Counter	3-25	SDLD001
SN54161W	4-Bit Synchronous Binary Counter	3-25	SDLD001
SN54162J	Synchronous 4-Bit Counter	—	SDLD001
SN54162W	Synchronous 4-Bit Counter	—	SDLD001
SN54163J	4-Bit Binary Counter	3-25	SDLD001
SN54163W	4-Bit Binary Counter	3-25	SDLD001
SN54164J	8-Bit Shift Register	3-22	SDLD001
SN54164W	8-Bit Shift Register	3-22	SDLD001
SN54165J	8-Bit Shift Register	3-22	SDLD001
SN54165W	8-Bit Shift Register	3-22	SDLD001
SN54166J	8-Bit Shift Register	3-22	SDLD001
SN54166W	8-Bit Shift Register	3-22	SDLD001
SN54167J	Synchronous Rate Multiplexer	3-27	SDLD001
SN54170J	4-by-4 Register File	3-23	SDLD001
SN54173J	4-Bit D-Type Register	3-24	SDLD001
SN54173W	4-Bit D-Type Register	3-24	SDLD001
SN54174J	Hex D-Type Flip-Flop	3-18	SDLD001
SN54174W	Hex D-Type Flip-Flop	3-18	SDLD001
SN54175J	Quad D-Type Flip-Flop	3-18	SDLD001
SN54175W	Quad D-Type Flip-Flop	3-18	SDLD001
SN54176J	4-Bit BCD Counter	3-26	SDLD001
SN54177J	4-Bit Binary Counter	3-26	SDLD001
SN54178J	4-Bit Parallel Register	—	SDLD001
SN54179J	4-Bit Parallel Register	—	SDLD001
SN54180J	Parity Generator/Checker	3-33	SDLD001
SN54180W	Parity Generator/Checker	3-33	SDLD001
SN54181J	4-Bit ALU	—	SDLD001
SN54181W	4-Bit ALU	—	SDLD001
SN54182J	Look-Ahead Carry Generator	—	SDLD001
SN54182W	Look-Ahead Carry Generator	—	SDLD001
SN54184J	BCD to Binary Counter	—	SDLD001
SN54185AJ	Binary to BCD Converter	—	SDLD001
SN54190J	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN54191J	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54191W	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54192J	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN54192W	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN54193J	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54193W	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN54195J	4-Bit Shift Register	3-22	SDLD001
SN54195W	4-Bit Shift Register	3-22	SDLD001
SN54196J	4-Bit BCD Counter	3-26	SDLD001
SN54197J	4-Bit Binary Counter	3-26	SDLD001
SN54197W	4-Bit Binary Counter	3-26	SDLD001
SN54198J	8-Bit Shift Register	3-22	SDLD001
SN54198W	8-Bit Shift Register	3-22	SDLD001
SN54199J	8-Bit Shift Register	3-22	SDLD001
SN54199W	8-Bit Shift Register	3-22	SDLD001
SN54221J	Dual Monostable Multivibrator	3-20	SDLD001
SN54246J	BCD-to-7-Segment Driver	—	SDLD001
SN54247J	BCD-to-7-Segment Driver	—	SDLD001
SN54251J	8-1 Data Selector/Multiplexer	3-29	SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN54259J SN54259W SN54265J SN54278J	8-Bit Addressable Latch 8-Bit Addressable Latch Quad AND/NAND Gate 4-Bit Priority Register	3-21 3-21 3-8 —	SDLD001 SDLD001 SDLD001 SDLD001
SN54278W SN54279J SN54279W SN54283J	4-Bit Priority Register Quad Set/Reset Latch Quad Set/Reset Latch 4-Bit Full Adder	— 3-20 3-20 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN54283W SN54284J SN54285J SN54290J	4-Bit Full Adder 4-by-4 Binary Multiplier 4-by-4 Binary Multiplier Decade and 4-Bit Binary Counter	3-34 — — —	SDLD001 SDLD001 SDLD001 SDLD001
SN54293J SN54298J SN54298W SN54365AJ	4-Bit Binary Counter Quad 2-Input Multiplexer Quad 2-Input Multiplexer Hex Bus Driver	3-26 3-28 3-28 3-10	SDLD001 SDLD001 SDLD001 SDLD001
SN54366AJ SN54366AW SN54367AJ SN54367AW	Hex Bus Driver Hex Bus Driver Hex Bus Driver Hex Bus Driver	3-10 3-10 3-10 3-10	SDLD001 SDLD001 SDLD001 SDLD001*
SN54368AJ SN54368AW SN54376J SN54390J	Hex Bus Driver Hex Bus Driver Quad J-K Flip-Flop 4-Bit Decade Counter	3-10 3-10 3-18 3-26	SDLD001 SDLD001* SDLD001 SDLD001
SN54393J SN54393W SN55ALS192FK SN55ALS192J	4-Bit Binary Counter 4-Bit Binary Counter Line Driver Line Driver	3-26 3-26 — —	SDLD001 SDLD001 SLLS007A SLLS007A
SN55ALS193FK SN55ALS193J SN55ALS194FK SN55ALS194J	Line Receiver Line Receiver Line Driver Line Driver	— — — —	SLYD002* SLYD002* SLYD002* SLYD002*
SN55ALS195FK SN55ALS195J SN74ACT8816GB SN74ACT8818GB	Line Receiver Line Receiver 16-Bit Registered ALU 16-Bit Microsequencer	— — — 4-46	SLYD002* SLYD002* TBA TBA
SN74ACT8832GB SN74ACT8836GB SN74ACT8837GB SN74ACT11000D	32-Bit Registered ALU Integer Multiplier Floating Point Processor Quad 2-Input NAND Gate	4-44 4-48 4-50 3-4	TBA TBA TBA SCAD001
SN74ACT11000N SN74ACT11002D SN74ACT11002N SN74ACT11004DW	Quad 2-Input NAND Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Hex Inverter	3-4 3-6 3-6 3-9	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11004N SN74ACT11008D SN74ACT11008N SN74ACT11010D	Hex Inverter Quad 2-Input AND Gate Quad 2-Input AND Gate Triple 3-Input NAND Gate	3-9 3-5 3-5 3-4	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11010N SN74ACT11011D SN74ACT11011N SN74ACT11020D	Triple 3-Input NAND Gate Triple 3-Input AND Gate Triple 3-Input AND Gate Dual 4-Input NAND Gate	3-4 3-5 3-5 3-4	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11020N SN74ACT11021D SN74ACT11021N SN74ACT11027D	Dual 4-Input NAND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate Triple 3-Input NOR Gate	3-4 3-5 3-5 3-6	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11027N SN74ACT11030D SN74ACT11030N SN74ACT11032D	Triple 3-Input NOR Gate 8-Input NAND Gate 8-Input NAND Gate Quad 2-Input OR Gate	3-6 3-4 3-4 3-6	SCAD001 SCAD001 SCAD001 SCAD001

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ACT11032N SN74ACT11034DW SN74ACT11034N SN74ACT11074D	Quad 2-Input OR Gate Hex Non-Inverter Hex Non-Inverter Dual D-Type Flip-Flop	3-6 3-9 3-9 3-17	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11074N SN74ACT11109D SN74ACT11109N SN74ACT11181DW	Dual D-Type Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop ALU Function Generator	3-17 3-17 3-17 3-34	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11181NT SN74ACT11240DW SN74ACT11240NT SN74ACT11241DW	ALU Function Generator Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-34 3-12 3-12 3-12	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11241NT SN74ACT11244DW SN74ACT11244NT SN74ACT11245DW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Bus Transceiver	3-12 3-12 3-12 3-13	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11245NT SN74ACT11373DW SN74ACT11373NT SN74ACT11374DW	Octal Bus Transceiver Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-13 3-21 3-21 3-18	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11374NT SN74ACT11520DW SN74ACT11520N SN74ACT11521DW	Octal D-Type Flip-Flop 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-18 3-32 3-32 3-32	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11521N SN74ACT11533DW SN74ACT11533NT SN74ACT11534DW	8-Bit Identity Comparator Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-32 3-21 3-21 3-19	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11534NT SN74ACT11620DW SN74ACT11620NT SN74ACT11623DW	Octal D-Type Flip-Flop Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-19 3-13 3-13 3-15	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11623NT SN74ACT11640DW SN74ACT11640NT SN74ACT11643DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-15 3-13 3-13 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11643NT SN74ACT11646DW SN74ACT11646NT SN74ACT11648DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-14 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11648NT SN74ACT11651DW SN74ACT11651NT SN74ACT11652DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-14 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11652NT SN74ACT11881DW SN74ACT11881NT SN74ACT11882DW	Octal Bus Transceiver ALU Function Generator ALU Function Generator 32-Bit Look-ahead Carry Generator	3-14 3-34 3-34 3-34	SCAD001 SCAD001 SCAD001 SCAD001
SN74ACT11882NT SN74ACT29116JD SN74ACT29116N SN74ACT29116FN	32-Bit Look-ahead Carry Generator 16-Bit Microprocessor 16-Bit Microprocessor 16-Bit Microprocessor	3-34 — — —	SCAD001 SCAS021 SCAS021 SCAS021
SN74AC11000D SN74AC11000N SN74AC11002D SN74AC11002N	Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate	3-4 3-4 3-6 3-6	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11004DW SN74AC11004N SN74AC11008D SN74AC11008N	Hex Inverter Hex Inverter Quad 2-Input AND Gate Quad 2-Input AND Gate	3-9 3-9 3-5 3-5	SCAD001 SCAD001 SCAD001 SCAD001



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AC11010D SN74AC11010N SN74AC11011D SN74AC11011N	Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input AND Gate Triple 3-Input AND Gate	3-4 3-4 3-5 3-5	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11020D SN74AC11020N SN74AC11021D SN74AC11021N	Dual 4-Input NAND Gate Dual 4-Input NAND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate	3-4 3-4 3-5 3-5	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11027D SN74AC11027N SN74AC11030D SN74AC11030N	Triple 3-Input NOR Gate Triple 3-Input NOR Gate 8-Input NAND Gate 8-Input NAND Gate	3-6 3-6 3-4 3-4	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11032D SN74AC11032N SN74AC11034DW SN74AC11034N	Quad 2-Input OR Gate Quad 2-Input OR Gate Hex Non-Inverter Hex Non-Inverter	3-6 3-6 3-9 3-9	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11074D SN74AC11074N SN74AC11109D SN74AC11109N	Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11181DW SN74AC11181NT SN74AC11240DW SN74AC11240NT	ALU Function Generator ALU Function Generator Octal Buffer/ Line Driver Octal Buffer/ Line Driver	3-34 3-34 3-12 3-12	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11244DW SN74AC11244NT SN74AC11245DW SN74AC11245NT	Octal Buffer/ Line Driver Octal Buffer/ Line Driver Octal Bus Transceiver Octal Bus Transceiver	3-12 3-12 3-13 3-13	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11373DW SN74AC11373NT SN74AC11374DW SN74AC11374NT	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11520DW SN74AC11520N SN74AC11521DW SN74AC11521N	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11533DW SN74AC11533NT SN74AC11534DW SN74AC11534NT	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-19 3-19	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11620DW SN74AC11620NT SN74AC11623DW SN74AC11623NT	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-15 3-15	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11640DW SN74AC11640NT SN74AC11643DW SN74AC11643NT	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-14 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11646DW SN74AC11646NT SN74AC11648DW SN74AC11648NT	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-14 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11651DW SN74AC11651NT SN74AC11652DW SN74AC11652NT	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-14 3-14	SCAD001 SCAD001 SCAD001 SCAD001
SN74AC11882DW SN74AC11882NT SN74ALS00AD SN74ALS00AFN	32-Bit Look-Ahead Carry Generator 32-Bit Look-Ahead Carry Generator Quad 2-Input NAND Gate Quad 2-Input NAND Gate	3-34 3-34 3-4 3-4	SCAD001 SCAD001 SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS00AN	Quad 2-Input NAND Gate	3-4	SDAD001B
SN74ALS01D	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS01FN	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS01N	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS02D	Quad 2-Input NOR Gate	3-6	SDAD001B
SN74ALS02FN	Quad 2-Input NOR Gate	3-6	SDAD001B
SN74ALS02N	Quad 2-Input NOR Gate	3-6	SDAD001B
SN74ALS03BD	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS03BFN	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS03BN	Quad 2-Input NAND Gate OC	3-5	SDAD001B
SN74ALS04BD	Hex Inverter	3-9	SDAD001B
SN74ALS04BFN	Hex Inverter	3-9	SDAD001B
SN74ALS04BN	Hex Inverter	3-9	SDAD001B
SN74ALS05AD	Hex Inverter OC	3-9	SDAD001B
SN74ALS05AFN	Hex Inverter OC	3-9	SDAD001B
SN74ALS05AN	Hex Inverter OC	3-9	SDAD001B
SN74ALS08D	Quad 2-Input AND Gate	3-5	SDAD001B
SN74ALS08FN	Quad 2-Input AND Gate	3-5	SDAD001B
SN74ALS08N	Quad 2-Input AND Gate	3-5	SDAD001B
SN74ALS09D	Quad 2-Input AND Gate OC	3-5	SDAD001B
SN74ALS09FN	Quad 2-Input AND Gate OC	3-5	SDAD001B
SN74ALS09N	Quad 2-Input AND Gate OC	3-5	SDAD001B
SN74ALS10AD	Triple 3-Input NAND Gate	3-4	SDAD001B
SN74ALS10AFN	Triple 3-Input NAND Gate	3-4	SDAD001B
SN74ALS10AN	Triple 3-Input NAND Gate	3-4	SDAD001B
SN74ALS11AD	Triple 3-Input AND Gate	3-5	SDAD001B
SN74ALS11AFN	Triple 3-Input AND Gate	3-5	SDAD001B
SN74ALS11AN	Triple 3-Input AND Gate	3-5	SDAD001B
SN74ALS12AD	Triple 3-Input NAND Gate OC	3-5	SDAD001B
SN74ALS12AFN	Triple 3-Input NAND Gate OC	3-5	SDAD001B
SN74ALS12AN	Triple 3-Input NAND Gate OC	3-5	SDAD001B
SN74ALS15AD	Triple 3-Input AND Gate OC	3-5	SDAD001B
SN74ALS15AFN	Triple 3-Input AND Gate OC	3-5	SDAD001B
SN74ALS15AN	Triple 3-Input AND Gate OC	3-5	SDAD001B
SN74ALS20AD	Dual 4-Input NAND Gate	3-4	SDAD001B
SN74ALS20AFN	Dual 4-Input NAND Gate	3-4	SDAD001B
SN74ALS20AN	Dual 4-Input NAND Gate	3-4	SDAD001B
SN74ALS21AD	Dual 4-Input AND Gate	3-5	SDAD001B
SN74ALS21AFN	Dual 4-Input AND Gate	3-5	SDAD001B
SN74ALS21AN	Dual 4-Input AND Gate	3-5	SDAD001B
SN74ALS22BD	Dual 4-Input NAND Gate OC	3-5	SDAD001B
SN74ALS22BFN	Dual 4-Input NAND Gate OC	3-5	SDAD001B
SN74ALS22BN	Dual 4-Input NAND Gate OC	3-5	SDAD001B
SN74ALS27D	Triple 3-Input NOR Gate	3-6	SDAD001B
SN74ALS27FN	Triple 3-Input NOR Gate	3-6	SDAD001B
SN74ALS27N	Triple 3-Input NOR Gate	3-6	SDAD001B
SN74ALS28AD	Quad 2-Input NOR Buffer	3-6	SDAD001B
SN74ALS28AFN	Quad 2-Input NOR Buffer	3-6	SDAD001B
SN74ALS28AN	Quad 2-Input NOR Buffer	3-6	SDAD001B
SN74ALS30AD	8-Input NAND Gate	3-4	SDAD001B
SN74ALS30AFN	8-Input NAND Gate	3-4	SDAD001B
SN74ALS30AN	8-Input NAND Gate	3-4	SDAD001B
SN74ALS32D	Quad 2-Input OR Gate	3-6	SDAD001B
SN74ALS32FN	Quad 2-Input OR Gate	3-6	SDAD001B
SN74ALS32N	Quad 2-Input OR Gate	3-6	SDAD001B
SN74ALS33AD	Quad 2-Input NOR Buffer OC	3-6	SDAD001B
SN74ALS33AFN	Quad 2-Input NOR Buffer OC	3-6	SDAD001B
SN74ALS33AN	Quad 2-Input NOR Buffer OC	3-6	SDAD001B
SN74ALS34D	Hex Non-Inverter	3-9	SDAD001B
SN74ALS34FN	Hex Non-Inverter	3-9	SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS34N SN74ALS35AD SN74ALS35AFN SN74ALS35AN	Hex Non-Inverter Hex Non-Inverter OC Hex Non-Inverter OC Hex Non-Inverter OC	3-9 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS37AD SN74ALS37AFN SN74ALS37AN SN74ALS38AD	Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer OC	3-4 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS38AFN SN74ALS38AN SN74ALS40AD SN74ALS40AFN	Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC Dual 4-Input NAND Buffer Dual 4-Input NAND Buffer	3-4 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS40AN SN74ALS74AD SN74ALS74AFN SN74ALS74AN	Dual 4-Input NAND Buffer Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual D-Type Flip-Flop	3-4 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS86D SN74ALS86FN SN74ALS86N SN74ALS109AD	Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Dual J-K Flip-Flop	3-7 3-7 3-7 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS109AFN SN74ALS109AN SN74ALS112AD SN74ALS112AFN	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS112AN SN74ALS113AD SN74ALS113AFN SN74ALS113AN	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS114AD SN74ALS114AFN SN74ALS114AN SN74ALS131D	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop 3-8 Line Decoder/Demultiplexer W/Latch	3-17 3-17 3-17 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS131FN SN74ALS131N SN74ALS133D SN74ALS133FN	3-8 Line Decoder/Demultiplexer W/Latch 3-8 Line Decoder/Demultiplexer W/Latch 13-Input NAND Gate 13-Input NAND Gate	3-30 3-30 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS133N SN74ALS136D SN74ALS136FN SN74ALS136N	13-Input NAND Gate Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate	3-4 3-7 3-7 3-7	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS137D SN74ALS137FN SN74ALS137N SN74ALS138D	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS138FN SN74ALS138N SN74ALS139D SN74ALS139FN	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS139N SN74ALS151D SN74ALS151FN SN74ALS151N	Dual 2-4 Decoder/Demultiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer	3-30 3-29 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS153D SN74ALS153FN SN74ALS153N SN74ALS154NT	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer 4-16 Line Decoder/Demultiplexer	3-28 3-28 3-28 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS156N SN74ALS157D SN74ALS157FN SN74ALS157N	Dual 2-4 Line Decoder/Demultiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-30 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS158D SN74ALS158FN SN74ALS158N SN74ALS160BD	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Decade Counter	3-28 3-28 3-28 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS160BFN SN74ALS160BN SN74ALS161BD SN74ALS161BFN	4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS161BN SN74ALS162BD SN74ALS162BFN SN74ALS162BN	4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS163BD SN74ALS163BFN SN74ALS163BN SN74ALS168BD	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Up/Down Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS168BFN SN74ALS168BN SN74ALS169BD SN74ALS169BFN	4-Bit Up/Down Synchronous Decade Counter 4-Bit Up/Down Synchronous Decade Counter 4-Bit Up/Down Synchronous Binary Counter 4-Bit Up/Down Synchronous Binary Counter	3-25 3-25 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS169BN SN74ALS174D SN74ALS174FN SN74ALS174N	4-Bit Up/Down Synchronous Binary Counter Hex D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop	3-26 3-20 3-20 3-20	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS175D SN74ALS175FN SN74ALS175N SN74ALS190D	Quad D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop Synchronous Up/Down Decade Counter	3-20 3-20 3-20 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS190FN SN74ALS190N SN74ALS191D SN74ALS191FN	Synchronous Up/Down Decade Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter	3-25 3-25 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS191N SN74ALS192D SN74ALS192FN SN74ALS192N	Synchronous Up/Down Binary Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Decade Counter Synchronous Up/Down Decade Counter	3-26 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS193D SN74ALS193FN SN74ALS193N SN74ALS229ADW	Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter FIFO Memory 16 × 5	3-26 3-26 3-26 10-9	SDAD001B SDAD001B SDAD001B SDVD001
SN74ALS229AFN SN74ALS229AN SN74ALS231DW SN74ALS231FN	FIFO Memory 16 × 5 FIFO Memory 16 × 5 Octal Buffer/Line Driver Octal Buffer/Line Driver	10-9 10-9 3-12 3-12	SDVD001 SDVD001 SDAD001B SDAD001B
SN74ALS231N SN74ALS232ADW SN74ALS232AFN SN74ALS232AN	Octal Buffer/Line Driver FIFO Memory 16 × 4 FIFO Memory 16 × 4 FIFO Memory 16 × 4	3-12 10-9 10-9 10-9	SDAD001B SDVD001 SDVD001 SDVD001
SN74ALS233ADW SN74ALS233AFN SN74ALS233AN SN74ALS234N	FIFO Memory 16 × 5 FIFO Memory 16 × 5 FIFO Memory 16 × 5 FIFO Memory 64 × 4	10-9 10-9 10-9 10-9	SDVD001 SDVD001 SDVD001 SDAS106
SN74ALS235N SN74ALS236N SN74ALS240ADW SN74ALS240AFN	FIFO Memory 64 × 5 FIFO Memory 64 × 4 Octal Buffer/Line Driver Octal Buffer/Line Driver	10-9 10-9 3-12 3-12	SDAS108 SDAS107 SDAD001B SDAD001B
SN74ALS240AN SN74ALS240A-1DW SN74ALS240A-1FN SN74ALS240A-1N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS241ADW SN74ALS241AFN SN74ALS241AN SN74ALS241A-1DW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS241A-1FN SN74ALS241A-1N SN74ALS242BD SN74ALS242BFN	Octal Buffer/Line Driver Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver	3-12 3-12 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS242BN SN74ALS242B-1D SN74ALS242B-1FN SN74ALS242B-1N	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-13 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS243AD SN74ALS243AFN SN74ALS243AN SN74ALS243A-1D	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-13 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS243A-1FN SN74ALS243A-1N SN74ALS244ADW SN74ALS244AFN	Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-13 3-13 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS244AN SN74ALS244A-1DW SN74ALS244A-1FN SN74ALS244A-1N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS245ADW SN74ALS245AFN SN74ALS245AN SN74ALS245A-1DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS245A-1FN SN74ALS245A-1N SN74ALS251D SN74ALS251FN	Octal Bus Transceiver Octal Bus Transceiver 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer	3-13 3-13 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS251N SN74ALS253D SN74ALS253FN SN74ALS253N	8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-29 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS257D SN74ALS257FN SN74ALS257N SN74ALS258D	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS258FN SN74ALS258N SN74ALS259D SN74ALS259FN	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer 8-Bit Addressable Latch 8-Bit Addressable Latch	3-28 3-28 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS259N SN74ALS273DW SN74ALS273FN SN74ALS273N	8-Bit Addressable Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS280D SN74ALS280FN SN74ALS280N SN74ALS299DW	9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 8-Bit Shift Register	3-33 3-33 3-33 3-22	SDVD001 SDVD001 SDVD001 SDAD001B
SN74ALS299FN SN74ALS299N SN74ALS323DW SN74ALS323FN	8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift/Storage Register 8-Bit Shift/Storage Register	3-22 3-22 3-22 3-22	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS323N SN74ALS352D SN74ALS352FN SN74ALS352N	8-Bit Shift/Storage Register Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-22 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS353D SN74ALS353FN SN74ALS353N SN74ALS373DW	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Octal D-Type Latch	3-28 3-28 3-28 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS373FN SN74ALS373N SN74ALS374DW SN74ALS374FN	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS374N SN74ALS465ADW SN74ALS465AFN SN74ALS465AN	Octal D-Type Flip-Flop Octal Buffer 3-State Output Octal Buffer 3-State Output Octal Buffer 3-State Output	3-18 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS466ADW SN74ALS466AFN SN74ALS466AN SN74ALS467ADW	Octal Buffer 3-State Output Octal Buffer 3-State Output Octal Buffer 3-State Output Octal Buffer 3-State Output	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS467AFN SN74ALS467AN SN74ALS468ADW SN74ALS468AFN	Octal Buffer 3-State Output Octal Buffer 3-State Output Octal Buffer 3-State Output Octal Buffer 3-State Output	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS468AN SN74ALS518DW SN74ALS518FN SN74ALS518N	Octal Buffer 3-State Output 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-12 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS519DW SN74ALS519FN SN74ALS519N SN74ALS520DW	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS520FN SN74ALS520N SN74ALS521DW SN74ALS521FN	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS521N SN74ALS522DW SN74ALS522FN SN74ALS522N	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS526DW SN74ALS526FN SN74ALS526N SN74ALS527DW	Fuse Programmable Comparator Fuse Programmable Comparator Fuse Programmable Comparator Fuse Programmable Comparator	3-33 3-33 3-33 3-33	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS527FN SN74ALS527N SN74ALS528D SN74ALS528FN	Fuse Programmable Comparator Fuse Programmable Comparator Fuse Programmable Comparator Fuse Programmable Comparator	3-33 3-33 3-33 3-33	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS528N SN74ALS533DW SN74ALS533FN SN74ALS533N	Fuse Programmable Comparator Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch	3-33 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS534DW SN74ALS534FN SN74ALS534N SN74ALS540DW	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal Buffer/Line Driver	3-19 3-19 3-19 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS540FN SN74ALS540N SN74ALS540-1DW SN74ALS540-1FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS540-1N SN74ALS541DW SN74ALS541FN SN74ALS541N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS541-1DW SN74ALS541-1FN SN74ALS541-1N SN74ALS560ADW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Synchronous 4-Bit Counter	3-12 3-12 3-12 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS560AFN SN74ALS560AN SN74ALS561ADW SN74ALS561AFN	Synchronous 4-Bit Counter Synchronous 4-Bit Counter Synchronous 4-Bit Counter Synchronous 4-Bit Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS561AN SN74ALS563ADW SN74ALS563AFN SN74ALS563AN	Synchronous 4-Bit Counter Octal D-Type Transparent Latch Octal D-Type Transparent Latch Octal D-Type Transparent Latch	3-25 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS564ADW SN74ALS564AFN SN74ALS564AN SN74ALS568ADW	Octal Edge-Triggered Flip-Flop Octal Edge-Triggered Flip-Flop Octal Edge-Triggered Flip-Flop 4-Bit Up/Down Decade Counter	3-19 3-19 3-19 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS568AFN SN74ALS568AN SN74ALS569ADW SN74ALS569AFN	4-Bit Up/Down Decade Counter 4-Bit Up/Down Decade Counter 4-Bit Up/Down Binary Counter 4-Bit Up/Down Binary Counter	3-25 3-25 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS569AN SN74ALS573BDW SN74ALS573BFN SN74ALS573BN	4-Bit Up/Down Binary Counter Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch	3-26 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS574ADW SN74ALS574AFN SN74ALS574AN SN74ALS575ADW	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS575AFN SN74ALS575ANT SN74ALS576ADW SN74ALS576AFN	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-18 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS576AN SN74ALS577ADW SN74ALS577ANT SN74ALS580ADW	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Latch	3-19 3-19 3-19 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS580AFN SN74ALS580AN SN74ALS614DW SN74ALS614NT	Octal D-Type Latch Octal D-Type Latch Octal Bus Transceiver/Register Octal Bus Transceiver/Register	3-21 3-21 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS614-1NT SN74ALS615DW SN74ALS615NT SN74ALS615-1NT	Octal Bus Transceiver/Register Octal Bus Transceiver/Register Octal Bus Transceiver/Register Octal Bus Transceiver/Register	3-11 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS616JD SN74ALS620ADW SN74ALS620AFN SN74ALS620AN	Error Detection and Correction Circuit Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-33 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS620A-1DW SN74ALS620A-1FN SN74ALS620A-1N SN74ALS621ADW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-13 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS621AFN SN74ALS621AN SN74ALS621A-1DW SN74ALS621A-1FN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS621A-1N SN74ALS622ADW SN74ALS622AFN SN74ALS622AN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS622A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS622A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS622A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS623ADW	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS623AFN	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS623AN	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS623A-1DW	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS623A-1FN	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS623A-1N	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS632AFN	Error Detection and Correction Circuit	3-33	SDAD001B
SN74ALS632AJD	Error Detection and Correction Circuit	3-33	SDAD001B
SN74ALS632BJD	Error Detection and Correction Circuit	3-33	SDAD001B
SN74ALS634AJD	Error Detection and Correction Circuit	3-33	SDAD001B
SN74ALS638ADW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS638AFN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS638AN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS638A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS638A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS638A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639ADW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639AFN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639AN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS639A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS640ADW	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS640AFN	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS640AN	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS640A-1DW	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS640A-1FN	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS640A-1N	Octal Bus Transceiver	3-13	SDAD001B
SN74ALS641ADW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS641AFN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS641AN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS641A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS641A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS641A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642ADW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642AFN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642AN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS642A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS643ADW	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS643AFN	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS643AN	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS643A-1DW	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS643A-1FN	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS643A-1N	Octal Bus Transceiver	3-14	SDAD001B
SN74ALS644ADW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS644AFN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS644AN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS644A-1DW	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS644A-1FN	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS644A-1N	Octal Bus Transceiver	3-11	SDAD001B
SN74ALS645ADW	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS645AFN	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS645AN	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS645A-1DW	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS645A-1FN	Octal Bus Transceiver	3-15	SDAD001B



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS645A-1N	Octal Bus Transceiver	3-15	SDAD001B
SN74ALS646DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS646FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS646NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS646-1DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS646-1FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS646-1NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS647DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS647FN	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS647NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS647-1DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS647-1FN	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS647-1NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS648DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS648FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS648NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS648-1DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS648-1FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS648-1NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS649DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS649NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS649-1DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS649-1NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS649-1DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS649-1NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS651FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS651NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS651-1DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS651-1FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS651-1NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652-1DW	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652-1FN	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS652-1NT	Octal Bus Transceiver and Register	3-14	SDAD001B
SN74ALS653DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS653FN	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS653NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS653-1DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS653-1FN	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS653-1NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS654DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS654NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS654-1DW	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS654-1NT	Octal Bus Transceiver and Register	3-11	SDAD001B
SN74ALS666DW	Octal D-Type Read-Back Latch	3-20	SDAD001B
SN74ALS666NT	Octal D-Type Read-Back Latch	3-20	SDAD001B
SN74ALS667DW	Octal D-Type Read-Back Latch	3-20	SDAD001B
SN74ALS667NT	Octal D-Type Read-Back Latch	3-20	SDAD001B
SN74ALS677ADW	Address Comparator	3-33	SDAD001B
SN74ALS677AFN	Address Comparator	3-33	SDAD001B
SN74ALS677ANT	Address Comparator	3-33	SDAD001B
SN74ALS678DW	Address Comparator	3-33	SDAD001B
SN74ALS678FN	Address Comparator	3-33	SDAD001B
SN74ALS678NT	Address Comparator	3-33	SDAD001B
SN74ALS679DW	Address Comparator	3-33	SDAD001B
SN74ALS679FN	Address Comparator	3-33	SDAD001B
SN74ALS679NT	Address Comparator	3-33	SDAD001B
SN74ALS680DW	Address Comparator	3-33	SDAD001B
SN74ALS680FN	Address Comparator	3-33	SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS680N SN74ALS688DW SN74ALS688FN SN74ALS688N	Address Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-33 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS689DW SN74ALS689FN SN74ALS689N SN74ALS746DW	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator Octal Buffer/Line Driver	3-32 3-32 3-32 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS746FN SN74ALS746N SN74ALS746-1DW SN74ALS746-1FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS746-1N SN74ALS747DW SN74ALS747FN SN74ALS747N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS747-1DW SN74ALS747-1FN SN74ALS747-1N SN74ALS756DW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-15 3-15 3-15 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS756FN SN74ALS756N SN74ALS756-1DW SN74ALS756-1FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-10 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS756-1N SN74ALS758D SN74ALS758FN SN74ALS758N	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-10 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS763DW SN74ALS763FN SN74ALS763N SN74ALS804ADW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Hex 2-Input NAND Driver	3-10 3-10 3-10 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS804AFN SN74ALS804AN SN74ALS805ADW SN74ALS805AFN	Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NOR Driver Hex 2-Input NOR Driver	3-4 3-4 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS805AN SN74ALS808ADW SN74ALS808AFN SN74ALS808AN	Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input AND Driver Hex 2-Input AND Driver	3-6 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS810D SN74ALS810FN SN74ALS810N SN74ALS811D	Quad Exclusive NOR Gate Quad Exclusive NOR Gate Quad Exclusive NOR Gate Quad Exclusive NOR Gate	3-7 3-7 3-7 3-7	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS811FN SN74ALS811N SN74ALS812NT SN74ALS819NT	Quad Exclusive NOR Gate Quad Exclusive NOR Gate Fuse Prog. Identity Comparator/Decoder 8-Bit Diagnostic/Pipeline Register	3-7 3-7 3-33 3-24	SDAD001B SDAD001B SDAS103 SDAS105
SN74ALS832ADW SN74ALS832AFN SN74ALS832AN SN74ALS841DW	Hex 2-Input OR Driver Hex 2-Input OR Driver Hex 2-Input OR Driver 10-Bit Bus Interface Latch	3-6 3-6 3-6 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS841FN SN74ALS841NT SN74ALS841-1DW SN74ALS842DW	10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS842FN SN74ALS842NT SN74ALS842-1DW SN74ALS843DW	10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 9-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS843FN SN74ALS843NT SN74ALS843-1DW SN74ALS844DW	9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS844FN SN74ALS844NT SN74ALS844-1DW SN74ALS844-1FN	9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS844-1NT SN74ALS845DW SN74ALS845FN SN74ALS845NT	9-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS845-1DW SN74ALS845-1FN SN74ALS845-1NT SN74ALS846DW	8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS846FN SN74ALS846NT SN74ALS846-1DW SN74ALS846-1FN	8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS846-1NT SN74ALS857DW SN74ALS857FN SN74ALS857NT	8-Bit Bus Interface Latch Hex 2-to-1 Multiplexer Hex 2-to-1 Multiplexer Hex 2-to-1 Multiplexer	3-21 3-29 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS867NT SN74ALS869NT SN74ALS873BDW SN74ALS873BFN	8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch	3-26 3-26 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS873BNT SN74ALS874BDW SN74ALS874BFN SN74ALS874BNT	Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop	3-21 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS876ADW SN74ALS876AFN SN74ALS876ANT SN74ALS878ADW	Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop	3-19 3-19 3-19 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS878AFN SN74ALS878ANT SN74ALS879ADW SN74ALS879ANT	Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop Dual 4-Bit D-Type Flip-Flop	3-18 3-18 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS880ADW SN74ALS880ANT SN74ALS990DW SN74ALS990N	Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch 8-Bit D-Type Read-Back Latch 8-Bit D-Type Read-Back Latch	3-21 3-21 3-20 3-20	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS991DW SN74ALS991N SN74ALS992DW SN74ALS992NT	8-Bit D-Type Read-Back Latch 8-Bit D-Type Read-Back Latch 9-Bit D-Type Read-Back Latch 9-Bit D-Type Read-Back Latch	3-20 3-20 3-20 3-20	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS993DW SN74ALS993NT SN74ALS994DW SN74ALS994NT	9-Bit D-Type Read-Back Latch 9-Bit D-Type Read-Back Latch 10-Bit D-Type Read-Back Latch 10-Bit D-Type Read-Back Latch	3-20 3-20 3-20 3-20	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS995DW SN74ALS995NT SN74ALS996DW SN74ALS996NT	10-Bit D-Type Read-Back Latch 10-Bit D-Type Read-Back Latch 8-Bit D-Type Read-Back Latch 8-Bit D-Type Read-Back Latch	3-20 3-20 3-20 3-20	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS996-1NT SN74ALS1000AD SN74ALS1000AFN SN74ALS1000AN	8-Bit D-Type Read-Back Latch Quad NAND Buffer/Driver Quad NAND Buffer/Driver Quad NAND Buffer/Driver	3-20 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS1002AD SN74ALS1002AFN SN74ALS1002AN SN74ALS1003AD	Quad NOR Buffer Quad NOR Buffer Quad NOR Buffer Quad NOR Buffer OC	3-6 3-6 3-6 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1003AFN SN74ALS1003AN SN74ALS1004D SN74ALS1004FN	Quad NOR Buffer OC Quad NOR Buffer OC Hex Inverting Driver Hex Inverting Driver	3-5 3-5 3-9 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1004N SN74ALS1005D SN74ALS1005FN SN74ALS1005N	Hex Inverting Driver Hex Inverting Buffer OC Hex Inverting Buffer OC Hex Inverting Buffer OC	3-9 3-9 3-9 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1008AD SN74ALS1008AFN SN74ALS1008AN SN74ALS1010AD	Quad AND Buffer Quad AND Buffer Quad AND Buffer Triple 3-Input NAND Buffer	3-5 3-5 3-5 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1010AFN SN74ALS1010AN SN74ALS1011AD SN74ALS1011AFN	Triple 3-Input NAND Buffer Triple 3-Input NAND Buffer Triple 3-Input AND Buffer Triple 3-Input AND Buffer	3-4 3-4 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1011AN SN74ALS1020AD SN74ALS1020AFN SN74ALS1020AN	Triple 3-Input AND Buffer Dual 4-Input NAND Buffer Dual 4-Input NAND Buffer Dual 4-Input NAND Buffer	3-5 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1032AD SN74ALS1032AFN SN74ALS1032AN SN74ALS1034D	Quad OR Buffer/Driver Quad OR Buffer/Driver Quad OR Buffer/Driver Hex Driver	3-6 3-6 3-6 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1034FN SN74ALS1034N SN74ALS1035D SN74ALS1035FN	Hex Driver Hex Driver Hex Noninverting Buffer Hex Noninverting Buffer	3-10 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1035N SN74ALS1240DW SN74ALS1240FN SN74ALS1240N	Hex Noninverting Buffer Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-10 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1240-1DW SN74ALS1240-1FN SN74ALS1240-1N SN74ALS1242D	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Quad Bus Transceiver	3-12 3-12 3-12 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1242FN SN74ALS1242N SN74ALS1244ADW SN74ALS1244AFN	Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Driver Octal Buffer/Driver	3-13 3-13 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1244AN SN74ALS1244A-1DW SN74ALS1244A-1FN SN74ALS1244A-1N	Octal Buffer/Driver Octal Buffer/Driver Octal Buffer/Driver Octal Buffer/Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1245ADW SN74ALS1245AFN SN74ALS1245AN SN74ALS1245A-1DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1245A-1FN SN74ALS1245A-1N SN74ALS1640ADW SN74ALS1640AFN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-14 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1640AN SN74ALS1640A-1DW SN74ALS1640A-1FN SN74ALS1640A-1N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS1645ADW SN74ALS1645AFN SN74ALS1645AN SN74ALS1645A-1DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1645A-1FN SN74ALS1645A-1N SN74ALS1804ADW SN74ALS1804AFN	Octal Bus Transceiver Octal Bus Transceiver Hex 2-Input NAND Driver Hex 2-Input NAND Driver	3-15 3-15 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1804AN SN74ALS1805ADW SN74ALS1805AFN SN74ALS1805AN	Hex 2-Input NAND Driver Hex 2-Input NOR Driver Hex 2-Input NOR Driver Hex 2-Input NOR Driver	3-4 3-6 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1808ADW SN74ALS1808AFN SN74ALS1808AN SN74ALS1832ADW	Hex 2-Input AND Driver Hex 2-Input AND Driver Hex 2-Input AND Driver Hex 2-Input OR Driver	3-10 3-10 3-10 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS1832AFN SN74ALS1832AN SN74ALS2240DW SN74ALS2240FN	Hex 2-Input OR Driver Hex 2-Input OR Driver Quad Line Driver Quad Line Driver	3-6 3-6 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS2240N SN74ALS2242D SN74ALS2242FN SN74ALS2242N	Quad Line Driver Quad Bus Transceiver/MOS Driver Quad Bus Transceiver/MOS Driver Quad Bus Transceiver/MOS Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS2540DW SN74ALS2540FN SN74ALS2540N SN74ALS2541DW	Octal Buffer and Line Driver Octal Buffer and Line Driver Octal Buffer and Line Driver Octal Buffer and Line Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS2541FN SN74ALS2541N SN74ALS2967JD SN74ALS2968JD	Octal Buffer and Line Driver Octal Buffer and Line Driver Dynamic Memory Controller Dynamic Memory Controller	3-15 3-15 4-63 4-63	SDAD001B SDAD001B SDAS121A SDAS121A
SN74ALS6301JD SN74ALS6302JD SN74ALS8003AP SN74ALS8161NT	Dynamic Memory Controller Dynamic Memory Controller Dual 2-Input NAND Gate 8-Bit Synchronous Binary Counter	4-65 4-65 3-4 3-25	SDAS120A SDAS120A SDAD001B SDAS116
SN74ALS8163NT SN74ALS8169NT SN74ALS29806DW SN74ALS29806FN	8-Bit Synchronous Binary Counter 8-Bit Synchronous Up/Down Binary Counter 2-to-4 Bit Comparator/Decoder 2-to-4 Bit Comparator/Decoder	3-25 3-26 3-32 3-32	SDAS104 SDAS117 SDAD001B SDAD001B
SN74ALS29806NT SN74ALS29809DW SN74ALS29809FN SN74ALS29809NT	2-to-4 Bit Comparator/Decoder 2-to-4 Bit Comparator/Decoder 2-to-4 Bit Comparator/Decoder 2-to-4 Bit Comparator/Decoder	3-32 3-32 3-32 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74ALS29818FN SN74ALS29818NT SN74ALS29827DW SN74ALS29827NT	8-Bit Diagnostic/Pipeline Register 8-Bit Diagnostic/Pipeline Register 10-Bit Buffer/Driver 10-Bit Buffer/Driver	3-24 3-24 3-13 3-13	SDVD001 SDVD001 SDAD001B SDAD001B
SN74ALS29828DW SN74ALS29828FN SN74ALS29828NT SN74ALS29833NT	10-Bit Buffer/Driver 10-Bit Buffer/Driver 10-Bit Buffer/Driver Bus Transceiver	3-13 3-13 3-13 3-14	SDAD001B SDAD001B SDAD001B SDAS119
SN74ALS29834NT SN74ALS29853NT SN74ALS29854NT SN74ALS29861NT	Bus Transceiver Bus Transceiver Bus Transceiver 10-Bit Transceiver	3-14 3-14 3-14 3-14	SDAS119 SDAS118 SDAS118 SDAD001B
SN74ALS29862DW SN74ALS29862NT SN74ALS29863DW SN74ALS29863FN	10-Bit Transceiver 10-Bit Transceiver 9-Bit Transceiver 9-Bit Transceiver	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDVD001 SDVD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74ALS29863NT SN74ALS29864DW SN74ALS29864FN SN74ALS29864NT	9-Bit Transceiver 9-Bit Transceiver 9-Bit Transceiver 9-Bit Transceiver	3-14 3-14 3-14 3-14	SDVD001 SDVD001 SDVD001 SDVD001
SN74AS-EVM-8 SN74AS00D SN74AS00FN SN74AS00N	Bit-Slice Evaluation Module Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate	4-40 3-4 3-4 3-4	SDBU004 SDAD001B SDAD001B SDAD001B
SN74AS02D SN74AS02FN SN74AS02N SN74AS04D	Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Hex Inverter	3-6 3-6 3-6 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS04FN SN74AS04N SN74AS08D SN74AS08FN	Hex Inverter Hex Inverter Quad 2-Input AND Gate Quad 2-Input AND Gate	3-9 3-9 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS08N SN74AS10D SN74AS10FN SN74AS10N	Quad 2-Input AND Gate Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input NAND Gate	3-5 3-4 3-4 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS11D SN74AS11FN SN74AS11N SN74AS20D	Triple 3-Input AND Gate Triple 3-Input AND Gate Triple 3-Input AND Gate Dual 4-Input NAND Gate	3-5 3-5 3-5 3-4	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS20FN SN74AS20N SN74AS21D SN74AS21FN	Dual 4-Input NAND Gate Dual 4-Input NAND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate	3-4 3-4 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS21N SN74AS27D SN74AS27FN SN74AS27N	Dual 4-Input AND Gate Triple 3-Input NOR Gate Triple 3-Input NOR Gate Triple 3-Input NOR Gate	3-5 3-6 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS30D SN74AS30FN SN74AS30N SN74AS32D	8-Input NAND Gate 8-Input NAND Gate 8-Input NAND Gate Quad 2-Input OR Gate	3-4 3-4 3-4 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS32FN SN74AS32N SN74AS34D SN74AS34FN	Quad 2-Input OR Gate Quad 2-Input OR Gate Hex Non-Inverter Hex Non-Inverter	3-6 3-6 3-9 3-9	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS34N SN74AS74D SN74AS74FN SN74AS74N	Hex Non-Inverter Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual D-Type Flip-Flop	3-9 3-17 3-17 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS95D SN74AS95FN SN74AS95N SN74AS109D	4-Bit Shift Register 4-Bit Shift Register 4-Bit Shift Register Dual J-K Flip-Flop	3-22 3-22 3-22 3-17	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS109FN SN74AS109N SN74AS131AD SN74AS131AFN	Dual J-K Flip-Flop Dual J-K Flip-Flop 3-8 Line Decoder with Latch 3-8 Line Decoder with Latch	3-17 3-17 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS131AN SN74AS137D SN74AS137FN SN74AS137N	3-8 Line Decoder with Latch 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS138D SN74AS138FN SN74AS138N SN74AS151D	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 8-1 Data Selector/Multiplexer	3-30 3-30 3-30 3-29	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS151FN SN74AS151N SN74AS153D SN74AS153FN	8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-29 3-29 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS153N SN74AS157D SN74AS157FN SN74AS157N	Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS158D SN74AS158FN SN74AS158N SN74AS160D	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Decade Counter	3-28 3-28 3-28 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS160FN SN74AS160N SN74AS161D SN74AS161FN	4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS161N SN74AS162D SN74AS162FN SN74AS162N	4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS163D SN74AS163FN SN74AS163N SN74AS168AD	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Up/Down Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS168AFN SN74AS168AN SN74AS169AD SN74AS169AFN	4-Bit Up/Down Synchronous Decade Counter 4-Bit Up/Down Synchronous Decade Counter 4-Bit Up/Down Synchronous Binary Counter 4-Bit Up/Down Synchronous Binary Counter	3-25 3-25 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS169AN SN74AS174D SN74AS174FN SN74AS174N	4-Bit Up/Down Synchronous Binary Counter Hex D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop	3-26 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS175AD SN74AS175AFN SN74AS175AN SN74AS181BDW	Quad D-Type Flip-Flop Quad D-Type Flip-Flop Quad D-Type Flip-Flop 4-Bit Arithmetic Logic Unit	3-18 3-18 3-18 3-34	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS181BN SN74AS181BNT SN74AS194D SN74AS194FN	4-Bit Arithmetic Logic Unit 4-Bit Arithmetic Logic Unit Universal Shift Register Universal Shift Register	3-34 3-34 3-22 3-22	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS194N SN74AS230DW SN74AS230FN SN74AS230N	Universal Shift Register Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-22 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS231DW SN74AS231FN SN74AS231N SN74AS240DW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS240FN SN74AS240N SN74AS241DW SN74AS241FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS241N SN74AS242D SN74AS242FN SN74AS242N	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-12 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS243D SN74AS243FN SN74AS243N SN74AS244DW	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-13 3-13 3-13 3-12	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS244FN SN74AS244N SN74AS245DW SN74AS245FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver	3-12 3-12 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS245N SN74AS250DW SN74AS250FN SN74AS250NT	Octal Bus Transceiver 16-1 Multiplexer 16-1 Multiplexer 16-1 Multiplexer	3-13 3-29 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS253D SN74AS253FN SN74AS253N SN74AS257D	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS257FN SN74AS257N SN74AS258D SN74AS258FN	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS258N SN74AS280D SN74AS280FN SN74AS280N	Quad 2-1 Data Selector/Multiplexer 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker	3-28 3-33 3-33 3-33	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS286D SN74AS286FN SN74AS286N SN74AS298D	9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker Quad 2-Input Multiplexer	3-33 3-33 3-33 3-24	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS298FN SN74AS298N SN74AS352D SN74AS352FN	Quad 2-Input Multiplexer Quad 2-Input Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-24 3-24 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS352N SN74AS353AD SN74AS353AFN SN74AS353AN	Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS373DW SN74AS373FN SN74AS373N SN74AS374DW	Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-21 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS374FN SN74AS374N SN74AS533DW SN74AS533FN	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Latch Octal D-Type Latch	3-18 3-18 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS533N SN74AS534DW SN74AS534FN SN74AS534N	Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS573DW SN74AS573FN SN74AS573N SN74AS574DW	Octal D-Type Latch Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-21 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS574FN SN74AS574N SN74AS575DW SN74AS575FN	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS575NT SN74AS576DW SN74AS576FN SN74AS576N	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-18 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS577DW SN74AS577FN SN74AS577NT SN74AS580DW	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Latch	3-19 3-19 3-19 3-21	SDAD001B SDAD001B SDAD001B SDAD001B



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS580FN SN74AS580N SN74AS620DW SN74AS620FN	Octal D-Type Latch Octal D-Type Latch Octal Bus Transceiver Octal Bus Transceiver	3-21 3-21 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS620N SN74AS621DW SN74AS621FN SN74AS621N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS622DW SN74AS622FN SN74AS622N SN74AS623DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS623FN SN74AS623N SN74AS632JD SN74AS638ADW	Octal Bus Transceiver Octal Bus Transceiver Error Detection and Correction Unit Octal Bus Transceiver	3-15 3-15 3-33 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS638AFN SN74AS638AN SN74AS639DW SN74AS639FN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS639N SN74AS640DW SN74AS640FN SN74AS640N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-13 3-13 3-13	SDAD001B SDAD001B SDAD001B SDAD001B
6N74AS641DW SN74AS641FN SN74AS641N SN74AS642DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS642FN SN74AS642N SN74AS643DW SN74AS643FN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS643N SN74AS644DW SN74AS644FN SN74AS644N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-14 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS645DW SN74AS645FN SN74AS645N SN74AS646DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver and Register	3-15 3-15 3-15 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS646FN SN74AS646NT SN74AS648DW SN74AS648FN	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS648NT SN74AS651DW SN74AS651FN SN74AS651NT	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS652DW SN74AS652FN SN74AS652NT SN74AS756DW	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Buffer/Line Driver	3-14 3-14 3-14 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS756FN SN74AS756N SN74AS757DW SN74AS757FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-10 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS757N SN74AS758D SN74AS758FN SN74AS758N	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-10 3-11 3-11 3-11	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS759D SN74AS759FN SN74AS759N SN74AS760DW	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-11 3-11 3-11 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS760FN SN74AS760N SN74AS762DW SN74AS762FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-10 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS762N SN74AS763DW SN74AS763FN SN74AS763N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-10 3-10 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS804BDW SN74AS804BFN SN74AS804BN SN74AS805BDW	Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NOR Driver	3-4 3-4 3-4 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS805BFN SN74AS805BN SN74AS808BDW SN74AS808BFN	Hex 2-Input NOR Driver Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input AND Driver	3-6 3-6 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS808BN SN74AS821DW SN74AS821FN SN74AS821NT	Hex 2-Input AND Driver 10-Bit Bus Interface Flip-Flop 10-Bit Bus Interface Flip-Flop 10-Bit Bus Interface Flip-Flop	3-10 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS822DW SN74AS822FN SN74AS822NT SN74AS823DW	10-Bit Bus Interface Flip-Flop 10-Bit Bus Interface Flip-Flop 10-Bit Bus Interface Flip-Flop 9-Bit Bus Interface Flip-Flop	3-19 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS823FN SN74AS823NT SN74AS824DW SN74AS824FN	9-Bit Bus Interface Flip-Flop 9-Bit Bus Interface Flip-Flop 9-Bit Bus Interface Flip-Flop 9-Bit Bus Interface Flip-Flop	3-19 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS824NT SN74AS825DW SN74AS825FN SN74AS825NT	9-Bit Bus Interface Flip-Flop 8-Bit Bus Interface Flip-Flop 8-Bit Bus Interface Flip-Flop 8-Bit Bus Interface Flip-Flop	3-19 3-19 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS826DW SN74AS826FN SN74AS826NT SN74AS832BDW	8-Bit Bus Interface Flip-Flop 8-Bit Bus Interface Flip-Flop 8-Bit Bus Interface Flip-Flop Hex 2-Input OR Driver	3-19 3-19 3-19 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS832BFN SN74AS832BN SN74AS841DW SN74AS841FN	Hex 2-Input OR Driver Hex 2-Input OR Driver 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch	3-6 3-6 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS841NT SN74AS842DW SN74AS842FN SN74AS842NT	10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch 10-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS843DW SN74AS843FN SN74AS843NT SN74AS844DW	9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 9-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS844FN SN74AS844NT SN74AS845DW SN74AS845FN	9-Bit Bus Interface Latch 9-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS845NT SN74AS846DW SN74AS846FN SN74AS846NT	8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch 8-Bit Bus Interface Latch	3-21 3-21 3-21 3-21	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS850FN SN74AS850N SN74AS851FN SN74AS851N	1 of 16 Data Selector/Multiplexer 1 of 16 Data Selector/Multiplexer 1 of 16 Data Selector/Multiplexer 1 of 16 Data Selector/Multiplexer	3-29 3-29 3-29 3-29	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS857DW SN74AS857FN SN74AS857NT SN74AS866FN	Hex 2-to-1 Multiplexer Hex 2-to-1 Multiplexer Hex 2-to-1 Multiplexer 8-Bit Magnitude Comparator	3-29 3-29 3-29 3-32	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS866N SN74AS867DW SN74AS867FN SN74AS867NT	8-Bit Magnitude Comparator 8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter	3-32 3-26 3-26 3-26	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS869DW SN74AS869FN SN74AS869NT SN74AS870DW	8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter 8-Bit Synchronous Up/Down Counter Dual 16-BY-4 Register File	3-26 3-26 3-26 3-23	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS870FN SN74AS870NT SN74AS871FN SN74AS871N	Dual 16-BY-4 Register File Dual 16-BY-4 Register File Dual 16-BY-4 Register File Dual 16-BY-4 Register File	3-23 3-23 3-23 3-23	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS873DW SN74AS873FN SN74AS873NT SN74AS874DW	Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch Dual 4-Bit Flip-Flop	3-21 3-21 3-21 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS874FN SN74AS874NT SN74AS876DW SN74AS876FN	Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop	3-18 3-18 3-19 3-19	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS876NT SN74AS878DW SN74AS878FN SN74AS878NT	Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop	3-19 3-18 3-18 3-18	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS879DW SN74AS879FN SN74AS879NT SN74AS880DW	Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit Flip-Flop Dual 4-Bit D-Type Latch	3-19 3-19 3-19 3-21	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS880FN SN74AS880NT SN74AS881ADW SN74AS881AFN	Dual 4-Bit D-Type Latch Dual 4-Bit D-Type Latch Arithmetic Logic Unit/Function Generator Arithmetic Logic Unit/Function Generator	3-21 3-21 3-34 3-34	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS881ANT SN74AS882ADW SN74AS882AFN SN74AS882ANT	Arithmetic Logic Unit/Function Generator 32-Bit Look-Ahead Carry Generator 32-Bit Look-Ahead Carry Generator 32-Bit Look-Ahead Carry Generator	3-34 3-34 3-34 3-34	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS885DW SN74AS885FN SN74AS885NT SN74AS887GB	8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Processor	3-32 3-32 3-32 4-31	SDAD001B SDAD001B SDAD001B SDVD001
SN74AS887-1GB SN74AS888GB SN74AS888-1GB SN74AS890GB	8-Bit Processor 8-Bit Processor Slice 8-Bit Processor Slice Microsequencer	4-31 4-33 4-33 4-35	SDVD001 SDVD001 SDVD001 SDVD001
SN74AS890-1GB SN74AS895GB SN74AS897AGB SN74AS1000AD	Microsequencer 8-Bit Memory Address Generator 16-Bit Parallel/Serial Barrel Shifter Quad NAND Buffer/Driver	4-35 4-36 4-38 3-4	SDVD001 SDVD001 SDVD001 SDAD001B
SN74AS1000AFN SN74AS1000AN SN74AS1004AD SN74AS1004AFN	Quad NAND Buffer/Driver Quad NAND Buffer/Driver Hex Inverting Driver Hex Inverting Driver	3-4 3-4 3-9 3-9	SDAD001B SDAD001B SDAD001B SDAD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74AS1004AN SN74AS1008AD SN74AS1008AFN SN74AS1008AN	Hex Inverting Driver Quad AND Buffer Quad AND Buffer Quad AND Buffer	3-9 3-5 3-5 3-5	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1032AD SN74AS1032AFN SN74AS1032AN SN74AS1034AD	Quad OR Buffer/Driver Quad OR Buffer/Driver Quad OR Buffer/Driver Hex Driver	3-6 3-6 3-6 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1034AFN SN74AS1034AN SN74AS1036AD SN74AS1036AFN	Hex Driver Hex Driver Quad 2-Input NOR Driver Quad 2-Input NOR Driver	3-10 3-10 3-6 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1036AN SN74AS1181DW SN74AS1181FN SN74AS1181NT	Quad 2-Input NOR Driver 4-Bit ALU Function Generator 4-Bit ALU Function Generator 4-Bit ALU Function Generator	3-6 3-34 3-34 3-34	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1804DW SN74AS1804FN SN74AS1804N SN74AS1805DW	Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NOR Driver	3-4 3-4 3-4 3-6	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1805FN SN74AS1805N SN74AS1808DW SN74AS1808FN	Hex 2-Input NOR Driver Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input AND Driver	3-6 3-6 3-10 3-10	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS1808N SN74AS1821NT SN74AS1823NT SN74AS1832DW	Hex 2-Input AND Driver 10-Bit Bus Interface Flip-Flop 9-Bit Bus Interface Flip-Flop Hex 2-Input OR Driver	3-10 3-19 3-19 3-6	SDAD001B SDAS131 SDAS126 SDAD001B
SN74AS1832FN SN74AS1832N SN74AS1841NT SN74AS1843NT	Hex 2-Input OR Driver Hex 2-Input OR Driver 10-Bit Bus Interface Latch 9-Bit Bus Interface Latch	3-6 3-6 3-21 3-21	SDAD001B SDAD001B SDAS130 SDAS127
SN74AS2620DW SN74AS2620FN SN74AS2620N SN74AS2623DW	Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS2623FN SN74AS2623N SN74AS2640DW SN74AS2640FN	Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS2640N SN74AS2645DW SN74AS2645FN SN74AS2645N	Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver Octal Bus Transceiver/MOS Driver	3-15 3-15 3-15 3-15	SDAD001B SDAD001B SDAD001B SDAD001B
SN74AS8833GB SN74AS8834GB SN74AS8838GB SN74AS8839GB	Funnel Shifter 40-Bit Register File 32-Bit Barrel Shifter 32-Bit Shuffle Exchange	4-52 4-55 4-54 4-57	TBA TBA SDVD001 SDAS100
SN74AS8840GB SN74BCT240D SN74BCT240N SN74BCT241D	Digital Crossbar Switch Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	4-59 3-12 3-12 3-12	SDAS114 TBA TBA TBA
SN74BCT241N SN74BCT244D SN74BCT244N SN74BCT245D	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Bus Transceiver	3-12 3-12 3-12 3-13	TBA TBA TBA TBA
SN74BCT245N SN74BCT373DW SN74BCT373N SN74BCT374DW	Octal Bus Transceiver Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-13 3-21 3-21 3-18	TBA TBA TBA TBA

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74BCT374N SN74BCT533DW SN74BCT533N SN74BCT534DW	Octal D-Type Flip-Flop Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-18 3-21 3-21 3-19	TBA TBA TBA TBA
SN74BCT534N SN74BCT819DW SN74BCT819NT SN74BCT819FN	Octal D-Type Flip-Flop Shadow Register Shadow Register Shadow Register	3-19 3-24 3-24 3-24	TBA TBA TBA TBA
SN74BCT1245DW SN74BCT1245N SN74BCT2240DW SN74BCT2240N	Low Power BCT245 Low Power BCT245 Octal MOS Memory Driver Octal MOS Memory Driver	3-14 3-14 3-15 3-15	TBA TBA TBA TBA
SN74BCT2241DW SN74BCT2241N SN74BCT2244DW SN74BCT2244N	Octal MOS Memory Driver Octal MOS Memory Driver Octal MOS Memory Driver Octal MOS Memory Driver	3-15 3-15 3-15 3-15	TBA TBA TBA TBA
SN74BCT2827DW SN74BCT2827NT SN74BCT2827FN SN74BCT2828DW	10-Bit MOS Memory Driver 10-Bit MOS Memory Driver 10-Bit MOS Memory Driver 10-Bit MOS Memory Driver	3-13 3-13 3-13 3-13	SCLS051 SCLS051 SCLS051 SCLS051
SN74BCT2828NT SN74BCT2828FN SN74BCT29818DW SN74BCT29818NT	10-Bit MOS Memory Driver 10-Bit MOS Memory Driver 8-Bit Diagnostic/Pipeline/Register 8-Bit Diagnostic/Pipeline/Register	3-13 3-13 3-24 3-24	SCLS051 SCLS051 TBA TBA
SN74BCT29818FN SN74BCT29827DW SN74BCT29827NT SN74BCT29827FN	8-Bit Diagnostic/Pipeline/Register 10-Bit Bus Driver 10-Bit Bus Driver 10-Bit Bus Driver	3-24 3-13 3-13 3-13	TBA SCLS052 SCLS052 SCLS052
SN74BCT29828DW SN74BCT29828NT SN74BCT29828FN SN74BCT29833DW	10-Bit Bus Driver 10-Bit Bus Driver 10-Bit Bus Driver Parity Bus Transceiver	3-13 3-13 3-13 3-14	SCLS052 SCLS052 SCLS052 TBA
SN74BCT29833NT SN74BCT29833FN SN74BCT29834DW SN74BCT29834NT	Parity Bus Transceiver Parity Bus Transceiver Parity Bus Transceiver Parity Bus Transceiver	3-14 3-14 3-14 3-14	TBA TBA TBA TBA
SN74BCT29834FN SN74BCT29853DW SN74BCT29853NT SN74BCT29853FN	Parity Bus Transceiver Parity Bus Transceiver Parity Bus Transceiver Parity Bus Transceiver	3-14 3-14 3-14 3-14	TBA TBA TBA TBA
SN74BCT29854DW SN74BCT29854NT SN74BCT29854FN SN74BCT29861DW	Parity Bus Transceiver Parity Bus Transceiver Parity Bus Transceiver 10-Bit Transceiver	3-14 3-14 3-14 3-14	TBA TBA TBA SCLS056
SN74BCT29861NT SN74BCT29861FN SN74BCT29862DW SN74BCT29862NT	10-Bit Transceiver 10-Bit Transceiver 10-Bit Transceiver 10-Bit Transceiver	3-14 3-14 3-14 3-14	SCLS056 SCLS056 TBA TBA
SN74BCT29862FN SN74BCT29863DW SN74BCT29863NT SN74BCT29863FN	10-Bit Transceiver 9 -Bit Transceiver 9 -Bit Transceiver 9 -Bit Transceiver	3-14 3-14 3-14 3-14	TBA SCLS055 SCLS055 SCLS055
SN74BCT29864DW SN74BCT29864NT SN74BCT29864FN SN74F00D	9 -Bit Transceiver 9 -Bit Transceiver 9 -Bit Transceiver Quad 2-Input NAND Gate	3-14 3-14 3-14 3-4	TBA TBA TBA SDFD001
SN74F00N SN74F02D SN74F02N SN74F04D	Quad 2-Input NAND Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Hex Inverter	3-4 3-6 3-6 3-9	SDFD001 SDFD001 SDFD001 SDFD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74F04N SN74F08D SN74F08N SN74F09D	Hex Inverter Quad 2-Input AND Gate Quad 2-Input AND Gate Quad 2-Input AND Gate OC	3-9 3-5 3-5 3-5	SDFD001 SDFD001 SDFD001 TBA
SN74F09N SN74F10D SN74F10N SN74F11D	Quad 2-Input AND Gate OC Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input AND Gate	3-5 3-4 3-4 3-5	TBA SDFD001 SDFD001 SDFD001
SN74F11N SN74F20D SN74F20N SN74F21D	Triple 3-Input AND Gate Dual 4-Input NAND Gate Dual 4-Input NAND Gate Dual 4-Input AND Gate	3-5 3-4 3-4 3-5	SDFD001 SDFD001 SDFD001 SDFD001
SN74F21N SN74F27D SN74F27N SN74F30D	Dual 4-Input AND Gate Triple 3-Input NOR Gate Triple 3-Input NOR Gate 8-Input NAND Gate	3-5 3-6 3-6 3-4	SDFD001 SDFD001 SDFD001 SDFD001
SN74F30N SN74F32D SN74F32N SN74F36D	8-Input NAND Gate Quad 2-Input OR Gate Quad 2-Input OR Gate Quad 2-Input NOR Gate	3-4 3-6 3-6 3-6	SDFD001 SDFD001 SDFD001 SDFD001
SN74F36N SN74F74D SN74F74N SN74F109D	Quad 2-Input NOR Gate Dual D-Type Flip-Flop Dual D-Type Flip-Flop Dual J-K Flip-Flop	3-6 3-17 3-17 3-17	SDFD001 SDFD001 SDFD001 SDFD001
SN74F109N SN74F112D SN74F112N SN74F113N	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDFD001 SDFD001 SDFD001 SDFD001
SN74F114N SN74F138D SN74F138N SN74F151D	Dual J-K Flip-Flop 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 8-1 Data Selector/Multiplexer	3-17 3-30 3-30 3-29	SDFD001 SDFD001 SDFD001 SDFD001
SN74F151N SN74F153D SN74F153N SN74F157AD	8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-29 3-28 3-28 3-28	SDFD001 SDFD001 SDFD001 SDFD001
SN74F157AN SN74F158AD SN74F158AN SN74F160AD	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Decade Counter	3-28 3-28 3-28 3-25	SDFD001 SDFD001 SDFD001 SDFD001
SN74F160AN SN74F161AD SN74F161AN SN74F162AD	4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDFD001 SDFD001 SDFD001 SDFD001
SN74F162AN SN74F163AD SN74F163AN SN74F168D	4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDFD001 SDFD001 SDFD001 SDFD001
SN74F168N SN74F169D SN74F169N SN74F174D	4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter Hex D-Type Flip-Flop	3-25 3-26 3-26 3-18	SDFD001 SDFD001 SDFD001 SDFD001
SN74F174N SN74F175D SN74F175N SN74F240DW	Hex D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop Octal Buffer/Line Driver	3-18 3-18 3-18 3-12	SDFD001 SDFD001 SDFD001 SDFD001
SN74F240N SN74F241DW SN74F241N SN74F242D	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Quad Bus Transceiver	3-12 3-12 3-12 3-13	SDFD001 SDFD001 SDFD001 SDFD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74F242N SN74F243D SN74F243N SN74F244DW	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-13 3-13 3-13 3-12	SDFD001 SDFD001 SDFD001 SDFD001
SN74F244N SN74F245DW SN74F245N SN74F251D	Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver 8-1 Data Selector/Multiplexer	3-12 3-13 3-13 3-29	SDFD001 SDFD001 SDFD001 SDFD001
SN74F251N SN74F253D SN74F253N SN74F257D	8-1 Data Selector/Multiplexer Dual 4-Input Multiplexer Dual 4-Input Multiplexer Quad 2-1 Data Selector/Multiplexer	3-29 3-28 3-28 3-28	SDFD001 SDFD001 SDFD001 SDFD001
SN74F257N SN74F258D SN74F258N SN74F273DW	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Octal D-Type Flip-Flop	3-28 3-28 3-28 3-18	SDFD001 SDFD001 SDFD001 SDFD001
SN74F273N SN74F280AD SN74F280AN SN74F283D	Octal D-Type Flip-Flop 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 4-Bit Full Adder	3-18 3-33 3-33 3-34	SDFD001 SDFD001 SDFD001 SDFD001
SN74F283N SN74F299DW SN74F299N SN74F323DW	4-Bit Full Adder 8-Bit Universal Shift/Storage Register 8-Bit Universal Shift/Storage Register 8-Bit Universal Shift/Storage Register	3-34 3-22 3-22 3-22	SDFD001 SDFD001 SDFD001 SDFD001
SN74F323N SN74F350D SN74F350N SN74F352D	8-Bit Universal Shift/Storage Register 4-Bit Shifter 4-Bit Shifter Dual Data Selector/Multiplexer	3-22 3-30 3-30 3-28	SDFD001 SDFD001 SDFD001 SDFD001
SN74F352N SN74F353D SN74F353N SN74F373DW	Dual Data Selector/Multiplexer Dual 4-1 Selector/Multiplexer Dual 4-1 Selector/Multiplexer Octal D-Type Latch	3-28 3-28 3-28 3-21	SDFD001 SDFD001 SDFD001 SDFD001
SN74F373N SN74F374DW SN74F374N SN74F377D	Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-18 3-18 3-18	SDFD001 SDFD001 SDFD001 SDFD001
SN74F377N SN74F378D SN74F378N SN74F379D	Octal D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDFD001 SDFD001 SDFD001 SDFD001
SN74F379N SN74F381DW SN74F381N SN74F382DW	Quad D-Type Flip-Flop ALU Function Generator ALU Function Generator ALU Function Generator	3-18 3-34 3-34 3-34	SDFD001 SDFD001 SDFD001 SDFD001
SN74F382N SN74F518DW SN74F518N SN74F519DW	ALU Function Generator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-34 3-32 3-32 3-32	SDFD001 SDFD001 SDFD001 SDFD001
SN74F519N SN74F520DW SN74F520N SN74F521DW	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDFD001 SDFD001 SDFD001 SDFD001
SN74F521N SN74F533DW SN74F533N SN74F534DW	8-Bit Identity Comparator Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-32 3-21 3-21 3-19	SDFD001 SDFD001 SDFD001 SDFD001
SN74F534N SN74F543DW SN74F543N SN74F544DW	Octal D-Type Flip-Flop Octal Registered Transceiver Octal Registered Transceiver Octal Registered Transceiver	3-19 3-14 3-14 3-14	SDFD001 SDFD001 SDFD001 SDFD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74F544N SN74F563DW SN74F563N SN74F564DW	Octal Registered Transceiver Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-14 3-21 3-21 3-19	SDFD001 TBA TBA TBA
SN74F564N SN74F568DW SN74F568N SN74F569DW	Octal D-Type Flip-Flop 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter	3-19 3-25 3-25 3-26	TBA SDFD001 SDFD001 SDFD001
SN74F569N SN74F573DW SN74F573N SN74F574DW	4-Bit Synchronous Binary Counter Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop	3-26 3-21 3-21 3-18	SDFD001 TBA TBA TBA
SN74F574N SN74F620N SN74F621N SN74F622N	Octal D-Type Flip-Flop Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-18 3-13 3-11 3-11	TBA SDFD001 SDFD001 SDFD001
SN74F623DW SN74F623N SN74HCT137DW SN74HCT137N	Octal Bus Transceiver Octal Bus Transceiver 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-15 3-15 3-30 3-30	SDFD001 SDFD001 SCLD001A SCLD001A
SN74HCT138DW SN74HCT138N SN74HCT237DW SN74HCT237N	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT238DW SN74HCT238N SN74HCT240DW SN74HCT240N	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Octal Buffer/Line Driver Octal Buffer/Line Driver	3-30 3-30 3-12 3-12	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT241DW SN74HCT241N SN74HCT242N SN74HCT243N	Octal Buffer/Line Driver Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver	3-12 3-12 3-13 3-13	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT244DW SN74HCT244N SN74HCT245DW SN74HCT245N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver	3-12 3-12 3-13 3-13	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT373DW SN74HCT373N SN74HCT374DW SN74HCT374N	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT533DW SN74HCT533N SN74HCT534DW SN74HCT534N	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-19 3-19	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT540DW SN74HCT540N SN74HCT541DW SN74HCT541N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT563DW SN74HCT563N SN74HCT564DW SN74HCT564N	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-19 3-19	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT573DW SN74HCT573N SN74HCT574DW SN74HCT574N	Octal D-Type Latch Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-21 3-21 3-18 3-18	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT620DW SN74HCT620N SN74HCT623DW SN74HCT623N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-15 3-15	SCLD001A SCLD001A SCLD001A SCLD001A



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HCT640DW SN74HCT640N SN74HCT643DW SN74HCT643N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT645DW SN74HCT645N SN74HCT646DW SN74HCT646NT	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-15 3-15 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT648DW SN74HCT648NT SN74HCT651DW SN74HCT651NT	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT652DW SN74HCT652NT SN74HCT658DW SN74HCT658NT	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT659DW SN74HCT659NT SN74HCT664DW SN74HCT664NT	Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HCT665DW SN74HCT665NT SN74HCU04D SN74HCU04N	Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Hex Inverter Hex Inverter	3-14 3-14 3-9 3-9	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC00D SN74HC00N SN74HC01D SN74HC01N	Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate O.D. Quad 2-Input NAND Gate O.D.	3-4 3-4 3-5 3-5	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC02D SN74HC02N SN74HC03D SN74HC03N	Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NAND Gate O.D. Quad 2-Input NAND Gate O.D.	3-6 3-6 3-5 3-5	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC04D SN74HC04N SN74HC05D SN74HC05N	Hex Inverter Hex Inverter Hex Inverter O.D. Hex Inverter O.D.	3-9 3-9 3-9 3-9	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC08D SN74HC08N SN74HC09D SN74HC09N	Quad 2-Input AND Gate Quad 2-Input AND Gate Quad 2-Input AND Gate O.D. Quad 2-Input AND Gate O.D.	3-5 3-5 3-5 3-5	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC10D SN74HC10N SN74HC11D SN74HC11N	Triple 3-Input NAND Gate Triple 3-Input NAND Gate Triple 3-Input AND Gate Triple 3-Input AND Gate	3-4 3-4 3-5 3-5	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC14D SN74HC14N SN74HC20D SN74HC20N	Hex Schmitt-Trigger Inverter Hex Schmitt-Trigger Inverter Dual 4-Input NAND Gate Dual 4-Input NAND Gate	3-9 3-9 3-4 3-4	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC21D SN74HC21N SN74HC27D SN74HC27N	Dual 4-Input AND Gate Dual 4-Input AND Gate Triple 3-Input NOR Gate Triple 3-Input NOR Gate	3-5 3-5 3-6 3-6	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC30D SN74HC30N SN74HC32D SN74HC32N	8-Input NAND Gate 8-Input NAND Gate Quad 2-Input OR Gate Quad 2-Input OR Gate	3-4 3-4 3-6 3-6	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC36D SN74HC36N SN74HC42DW SN74HC42N	Quad 2-Input NOR Gate Quad 2-Input NOR Gate 4-of-10 Decoder 4-of-10 Decoder	3-6 3-6 3-30 3-30	SCLD001A SCLD001A SCLD001A SCLD001A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HC51D	Dual AND-OR Invert Gate	3-7	SCLD001A
SN74HC51N	Dual AND-OR Invert Gate	3-7	SCLD001A
SN74HC73D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC73N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC74D	Dual D-Type Flip-Flop	3-17	SCLD001A
SN74HC74N	Dual D-Type Flip-Flop	3-17	SCLD001A
SN74HC75D	4-Bit Bistable Latch	3-20	SCLD001A
SN74HC75N	4-Bit Bistable Latch	3-20	SCLD001A
SN74HC76D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC76N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC78D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC78N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC85ADW	4-Bit Magnitude Comparator	3-32	SCLD001A
SN74HC85AN	4-Bit Magnitude Comparator	3-32	SCLD001A
SN74HC86D	Quad 2-Input Exclusive-OR Gate	3-7	SCLD001A
SN74HC86N	Quad 2-Input Exclusive-OR Gate	3-7	SCLD001A
SN74HC107D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC107N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC109D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC109N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC112D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC112N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC113D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC113N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC114D	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC114N	Dual J-K Flip-Flop	3-17	SCLD001A
SN74HC125N	Quad 3-State Buffer	3-12	SCLD001A
SN74HC126N	Quad 3-State Buffer	3-12	SCLD001A
SN74HC132D	Quad 2-Input NAND Schmitt-Trigger	3-4	SCLD001A
SN74HC132N	Quad 2-Input NAND Schmitt-Trigger	3-4	SCLD001A
SN74HC133D	13-Input NAND Gate	3-4	SCLD001A
SN74HC133N	13-Input NAND Gate	3-4	SCLD001A
SN74HC137DW	3-8 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC137N	3-8 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC138D	3-8 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC138N	3-8 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC139DW	Dual 2-4 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC139N	Dual 2-4 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC147DW	10-to-4 Line Encoder	3-29	SCLD001A
SN74HC147N	10-to-4 Line Encoder	3-29	SCLD001A
SN74HC148DW	8-to-3 Line Encoder	3-29	SCLD001A
SN74HC148N	8-to-3 Line Encoder	3-29	SCLD001A
SN74HC151D	8-1 Data Selector/Multiplexer	3-29	SCLD001A
SN74HC151N	8-1 Data Selector/Multiplexer	3-29	SCLD001A
SN74HC152D	8-1 Data Selector/Multiplexer	3-29	SCLD001A
SN74HC152N	8-1 Data Selector/Multiplexer	3-29	SCLD001A
SN74HC153DW	Dual 4-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC153N	Dual 4-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC154DW	4-16 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC154NT	4-16 Line Decoder/Demultiplexer	3-30	SCLD001A
SN74HC157DW	Quad 2-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC157N	Quad 2-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC158DW	Quad 2-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC158N	Quad 2-1 Data Selector/Multiplexer	3-28	SCLD001A
SN74HC160D	4-Bit Synchronous Decade Counter	3-25	SCLD001A
SN74HC160N	4-Bit Synchronous Decade Counter	3-25	SCLD001A
SN74HC161D	4-Bit Synchronous Binary Counter	3-25	SCLD001A
SN74HC161N	4-Bit Synchronous Binary Counter	3-25	SCLD001A
SN74HC162D	4-Bit Synchronous Decade Counter	3-25	SCLD001A
SN74HC162N	4-Bit Synchronous Decade Counter	3-25	SCLD001A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HC163D SN74HC163N SN74HC164N SN74HC165D	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 8-Bit Shift Register 8-Bit Shift Register	3-25 3-25 3-22 3-22	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC165N SN74HC166D SN74HC166N SN74HC173D	8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register 4-Bit D-Type Register	3-22 3-22 3-22 3-24	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC173N SN74HC174D SN74HC174N SN74HC175D	4-Bit D-Type Register Hex D-Type Flip-Flop Hex D-Type Flip-Flop Quad D-Type Flip-Flop	3-24 3-18 3-18 3-18	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC175N SN74HC180D SN74HC180N SN74HC190DW	Quad D-Type Flip-Flop 9-Bit Odd/Even Parity Generator 9-Bit Odd/Even Parity Generator Synchronous Up/Down Decade Counter	3-18 3-32 3-32 3-25	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC190N SN74HC191DW SN74HC191N SN74HC192DW	Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Decade Counter	3-25 3-26 3-26 3-25	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC192N SN74HC193DW SN74HC193N SN74HC194DW	Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter 4-Bit Universal Shift Register	3-25 3-26 3-26 3-22	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC194N SN74HC195DW SN74HC195N SN74HC237DW	4-Bit Universal Shift Register 4-Bit Shift Register 4-Bit Shift Register 3-8 Line Decoder/Demultiplexer	3-22 3-22 3-22 3-30	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC237N SN74HC238DW SN74HC238N SN74HC239DW	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Dual 2-4 Decoder	3-30 3-30 3-30 3-30	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC239N SN74HC240DW SN74HC240N SN74HC241DW	Dual 2-4 Decoder Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-30 3-12 3-12 3-12	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC241N SN74HC242N SN74HC243N SN74HC244DW	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-12 3-13 3-13 3-12	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC244N SN74HC245DW SN74HC245N SN74HC251D	Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver Data Selector/Multiplexer	3-12 3-13 3-13 3-29	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC251N SN74HC253DW SN74HC253N SN74HC257DW	Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-29 3-28 3-28 3-28	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC257N SN74HC258DW SN74HC258N SN74HC259D	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer 8-Bit Addressable Latch	3-28 3-28 3-28 3-21	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC259N SN74HC266D SN74HC266N SN74HC273DW	8-Bit Addressable Latch Quad 2-Input Exclusive NOR Gate Quad 2-Input Exclusive NOR Gate Octal D-Type Flip-Flop	3-21 3-7 3-7 3-18	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC273N SN74HC280D SN74HC280N SN74HC283D	Octal D-Type Flip-Flop 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 4-Bit Full Adder	3-18 3-33 3-33 3-34	SCLD001A SCLD001A SCLD001A SCLD001A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HC283N SN74HC298DW SN74HC298N SN74HC299DW	4-Bit Full Adder Quad 2-Input Multiplexer Quad 2-Input Multiplexer 8-Bit Shift Register	3-34 3-28 3-28 3-22	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC299N SN74HC352DW SN74HC352N SN74HC353DW	8-Bit Shift Register Dual 4-1 Selector/Multiplexer Dual 4-1 Selector/Multiplexer Dual 4-1 Selector/Multiplexer	3-22 3-28 3-28 3-28	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC353N SN74HC356DW SN74HC356N SN74HC373DW	Dual 4-1 Selector/Multiplexer 8-1 Selector/Multiplexer Register 8-1 Selector/Multiplexer Register Octal D-Type Latch	3-28 3-24 3-24 3-21	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC373N SN74HC374DW SN74HC374N SN74HC375D	Octal D-Type Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop 4-Bit Bistable Latch	3-21 3-18 3-18 3-20	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC375N SN74HC377DW SN74HC377N SN74HC378D	4-Bit Bistable Latch Octal D-Type Flip-Flop Octal D-Type Flip-Flop Hex D-Type Flip-Flops	3-20 3-18 3-18 3-18	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC378N SN74HC379D SN74HC379N SN74HC386D	Hex D-Type Flip-Flops Quad D-Type Flip-Flop Quad D-Type Flip-Flop Quad 2-Input Exclusive OR Gate	3-18 3-18 3-18 3-7	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC386N SN74HC390DW SN74HC390N SN74HC393N	Quad 2-Input Exclusive OR Gate 4-Bit Decade/Binary Counter 4-Bit Decade/Binary Counter 4-Bit Decade/Binary Counter	3-7 3-26 3-26 3-26	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC490DW SN74HC490N SN74HC533DW SN74HC533N	Dual 4-Bit Decade Counter Dual 4-Bit Decade Counter Octal D-Type Latch Octal D-Type Latch	3-26 3-26 3-21 3-21	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC534DW SN74HC534N SN74HC540DW SN74HC540N	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal Buffer/Line Driver Octal Buffer/Line Driver	3-19 3-19 3-12 3-12	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC541DW SN74HC541N SN74HC563DW SN74HC563N	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal D-Type Latch Octal D-Type Latch	3-12 3-12 3-21 3-21	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC564DW SN74HC564N SN74HC573DW SN74HC573N	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Octal D-Type Latch Octal D-Type Latch	3-19 3-19 3-21 3-21	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC574DW SN74HC574N SN74HC590DW SN74HC590N	Octal D-Type Flip-Flop Octal D-Type Flip-Flop Binary Counter With Output Register Binary Counter With Output Register	3-18 3-18 3-27 3-27	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC594D SN74HC594N SN74HC595DW SN74HC595N	Shift Register With Output Register Shift Register with Output Register Shift Register with Output Register Shift Register with Output Register	3-23 3-23 3-23 3-23	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC604N SN74HC620DW SN74HC620N SN74HC623DW	Octal 2-Input Multiplexed Latch Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-28 3-13 3-13 3-15	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC623N SN74HC640DW SN74HC640N SN74HC643DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-15 3-13 3-13 3-14	SCLD001A SCLD001A SCLD001A SCLD001A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HC643N SN74HC645DW SN74HC645N SN74HC646DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver and Register	3-14 3-15 3-15 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC646NT SN74HC648DW SN74HC648NT SN74HC651DW	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC651NT SN74HC652DW SN74HC652NT SN74HC658DW	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver with Parity	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC658NT SN74HC659DW SN74HC659NT SN74HC664DW	Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity	3-14 3-14 3-14 3-14	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC664NT SN74HC665DW SN74HC665NT SN74HC677DW	Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity Octal Bus Transceiver with Parity 16-Bit Address Comparator	3-14 3-14 3-14 3-33	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC677NT SN74HC678DW SN74HC678NT SN74HC679DW	16-Bit Address Comparator 16-Bit Address Comparator 16-Bit Address Comparator 12-Bit Address Comparator	3-33 3-33 3-33 3-33	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC679N SN74HC680DW SN74HC680N SN74HC682DW	12-Bit Address Comparator 12-Bit Address Comparator 12-Bit Address Comparator 8-Bit Magnitude Comparator	3-33 3-33 3-33 3-32	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC682N SN74HC684DW SN74HC684N SN74HC688DW	8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Magnitude Comparator	3-32 3-32 3-32 3-32	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC688N SN74HC804DW SN74HC804N SN74HC805DW	8-Bit Magnitude Comparator Hex 2-Input NAND Driver Hex 2-Input NAND Driver Hex 2-Input NOR Driver	3-32 3-4 3-4 3-6	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC805N SN74HC808DW SN74HC808N SN74HC832DW	Hex 2-Input NOR Driver Hex 2-Input AND Driver Hex 2-Input AND Driver Hex 2-Input OR Driver	3-6 3-10 3-10 3-6	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC832N SN74HC4002D SN74HC4002N SN74HC4017DW	Hex 2-Input OR Driver Dual 4-Input NOR Gate Dual 4-Input NOR Gate Decade Counter/Divider	3-6 3-6 3-6 3-26	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC4017N SN74HC4020DW SN74HC4020N SN74HC4024D	Decade Counter/Divider 14-Stage Binary Counter 14-Stage Binary Counter 7-Bit Binary Counter	3-26 3-26 3-26 3-26	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC4024N SN74HC4040DW SN74HC4040N SN74HC4060DW	7-Bit Binary Counter 12-Bit Binary Counter 12-Bit Binary Counter Asynchronous Binary Counter/Oscillator	3-26 3-26 3-26 3-26	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC4060N SN74HC4061DW SN74HC4061N SN74HC4075D	Asynchronous Binary Counter/Oscillator Asynchronous Binary Counter/Oscillator Asynchronous Binary Counter/Oscillator Triple 3-Input OR Gate	3-26 3-26 3-26 3-6	SCLD001A SCLD001A SCLD001A SCLD001A
SN74HC4075N SN74HC4078AD SN74HC4078AN SN74HC4514DW	Triple 3-Input OR Gate 8-Input OR/NOR Gate 8-Input OR/NOR Gate 4-to-16 Line Decoder/Latch	3-6 3-7 3-7 3-30	SCLD001A SCLD001A SCLD001A SCLD001A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74HC4514NT	4-to-16 Line Decoder/Latch	3-30	SCLD001A
SN74HC4515DW	4-to-16 Line Decoder/Latch	3-30	SCLD001A
SN74HC4515NT	4-to-16 Line Decoder/Latch	3-30	SCLD001A
SN74HC4724DW	8-Bit Addressable Latch	3-21	SCLD001A
SN74HC4724N	8-Bit Addressable Latch	3-21	SCLD001A
SN74HC7001D	Quad AND Gate	3-5	SCLD001A
SN74HC7001N	Quad AND Gate	3-5	SCLD001A
SN74HC7002D	Quad NOR Gate	3-6	SCLD001A
SN74HC7002N	Quad NOR Gate	3-6	SCLD001A
SN74HC7006DW	6-Section Multifunction Circuit	3-8	SCLD001A
SN74HC7006NT	6-Section Multifunction Circuit	3-8	SCLD001A
SN74HC7008DW	6-Section Multifunction Circuit	3-8	SCLD001A
SN74HC7008NT	6-Section Multifunction Circuit	3-8	SCLD001A
SN74HC7022DW	Octal Counter/Divider	3-26	SCLD001A
SN74HC7022N	Octal Counter/Divider	3-26	SCLD001A
SN74HC7032D	Quad OR Gate	3-6	SCLD001A
SN74HC7032N	Quad OR Gate	3-6	SCLD001A
SN74HC7074DW	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7074NT	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7075DW	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7075NT	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7076DW	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7076NT	6-Section Multifunction Circuit	3-17	SCLD001A
SN74HC7266D	Quad 2-Input Exclusive NOR Gate	3-7	SCLD001A
SN74HC7266N	Quad 2-Input Exclusive NOR Gate	3-7	SCLD001A
SN74LS00D	Quad 2-Input NAND Gate	3-4	SDL001
SN74LS00FN	Quad 2-Input NAND Gate	3-4	SDL001
SN74LS00N	Quad 2-Input NAND Gate	3-4	SDL001
SN74LS01D	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS01FN	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS01N	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS02D	Quad 2-Input NOR Gate	3-6	SDL001
SN74LS02FN	Quad 2-Input NOR Gate	3-6	SDL001
SN74LS02N	Quad 2-Input NOR Gate	3-6	SDL001
SN74LS03D	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS03FN	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS03N	Quad 2-Input NAND Gate OC	3-5	SDL001
SN74LS04D	Hex Inverter	3-9	SDL001
SN74LS04FN	Hex Inverter	3-9	SDL001
SN74LS04N	Hex Inverter	3-9	SDL001
SN74LS05D	Hex Inverter OC	3-9	SDL001
SN74LS05FN	Hex Inverter OC	3-9	SDL001
SN74LS05N	Hex Inverter OC	3-9	SDL001
SN74LS08D	Quad 2-Input AND Gate	3-5	SDL001
SN74LS08FN	Quad 2-Input AND Gate	3-5	SDL001
SN74LS08N	Quad 2-Input AND Gate	3-5	SDL001
SN74LS09D	Quad 2-Input AND Gate OC	3-5	SDL001
SN74LS09FN	Quad 2-Input AND Gate OC	3-5	SDL001
SN74LS09N	Quad 2-Input AND Gate OC	3-5	SDL001
SN74LS10D	Triple 3-Input NAND Gate	3-4	SDL001
SN74LS10FN	Triple 3-Input NAND Gate	3-4	SDL001
SN74LS10N	Triple 3-Input NAND Gate	3-4	SDL001
SN74LS11D	Triple 3-Input AND Gate	3-5	SDL001
SN74LS11FN	Triple 3-Input AND Gate	3-5	SDL001
SN74LS11N	Triple 3-Input AND Gate	3-5	SDL001
SN74LS12D	Triple 3-Input NAND Gate OC	3-5	SDL001
SN74LS12FN	Triple 3-Input NAND Gate OC	3-5	SDL001
SN74LS12N	Triple 3-Input NAND Gate OC	3-5	SDL001
SN74LS13D	Dual 4-Input NAND Schmitt-Trigger	3-4	SDL001
SN74LS13FN	Dual 4-Input NAND Schmitt-Trigger	3-4	SDL001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS13N SN74LS14D SN74LS14FN SN74LS14N	Dual 4-Input NAND Schmitt-Trigger Hex Schmitt-Trigger Inverter Hex Schmitt-Trigger Inverter Hex Schmitt-Trigger Inverter	3-4 3-9 3-9 3-9	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS15D SN74LS15FN SN74LS15N SN74LS19AD	Triple 3-Input AND Gate OC Triple 3-Input AND Gate OC Triple 3-Input AND Gate OC Hex Schmitt-Trigger Inverter	3-5 3-5 3-5 3-9	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS19AFN SN74LS19AN SN74LS20D SN74LS20FN	Hex Schmitt-Trigger Inverter Hex Schmitt-Trigger Inverter Dual 4-Input NAND Gate Dual 4-Input NAND Gate	3-9 3-9 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS20N SN74LS21D SN74LS21FN SN74LS21N	Dual 4-Input NAND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate Dual 4-Input AND Gate	3-4 3-5 3-5 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS26D SN74LS26FN SN74LS26N SN74LS27D	Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate Triple 3-Input NOR Gate	3-4 3-4 3-4 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS27FN SN74LS27N SN74LS28D SN74LS28FN	Triple 3-Input NOR Gate Triple 3-Input NOR Gate Quad 2-Input NOR Buffer Quad 2-Input NOR Buffer	3-6 3-6 3-6 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS28N SN74LS30D SN74LS30FN SN74LS30N	Quad 2-Input NOR Buffer 8-Input NAND Gate 8-Input NAND Gate 8-Input NAND Gate	3-6 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS31D SN74LS31FN SN74LS31N SN74LS32D	Delay Element Delay Element Delay Element Quad 2-Input OR Gate	3-8 3-8 3-8 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS32FN SN74LS32N SN74LS33D SN74LS33FN	Quad 2-Input OR Gate Quad 2-Input OR Gate Quad 2-Input NOR Buffer OC Quad 2-Input NOR Buffer OC	3-6 3-6 3-6 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS33N SN74LS37D SN74LS37FN SN74LS37N	Quad 2-Input NOR Buffer OC Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer	3-6 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS38D SN74LS38FN SN74LS38N SN74LS40D	Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC Dual 4-Input NAND Buffer	3-4 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS40FN SN74LS40N SN74LS42D SN74LS42FN	Dual 4-Input NAND Buffer Dual 4-Input NAND Buffer BCD-to-Decimal Decoder BCD-to-Decimal Decoder	3-4 3-4 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS42N SN74LS47D SN74LS47FN SN74LS47N	BCD-to-Decimal Decoder BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver	3-30 3-33 3-33 3-33	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS51D SN74LS51FN SN74LS51N SN74LS54D	Dual AND-OR-Invert Gate Dual AND-OR-Invert Gate Dual AND-OR-Invert Gate AND-OR-Invert Gate	3-7 3-7 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS54FN SN74LS54N SN74LS55D SN74LS55FN	AND-OR-Invert Gate AND-OR-Invert Gate AND-OR-Invert Gate AND-OR-Invert Gate	3-7 3-7 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS55N SN74LS73AD SN74LS73AN SN74LS74AD	AND-OR-Invert Gate Dual J-K Flip-Flop Dual J-K Flip-Flop Dual D-Type Flip-Flop	3-7 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS74AFN SN74LS74AN SN74LS75D SN74LS75FN	Dual D-Type Flip-Flop Dual D-Type Flip-Flop 4-Bit Latch 4-Bit Latch	3-17 3-17 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS75N SN74LS76AD SN74LS76AFN SN74LS76AN	4-Bit Latch Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-20 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS78AD SN74LS78AFN SN74LS78AN SN74LS83AD	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop 4-Bit Binary Adder	3-17 3-17 3-17 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS83AN SN74LS85D SN74LS85FN SN74LS85N	4-Bit Binary Adder 4-Bit Magnitude Comparator 4-Bit Magnitude Comparator 4-Bit Magnitude Comparator	3-34 3-32 3-32 3-32	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS86AD SN74LS86AFN SN74LS86AN SN74LS90D	Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Quad 2-Input Exclusive OR Gate Decade Counter	3-7 3-7 3-7 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS90FN SN74LS90N SN74LS91D SN74LS91FN	Decade Counter Decade Counter 8-Bit Shift Register 8-Bit Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS91N SN74LS92D SN74LS92FN SN74LS92N	8-Bit Shift Register Divide-by-12 Counter Divide-by-12 Counter Divide-by-12 Counter	3-22 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS93D SN74LS93FN SN74LS93N SN74LS95BD	4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Shift Register	3-26 3-26 3-26 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS95BFN SN74LS95BN SN74LS96D SN74LS96N	4-Bit Shift Register 4-Bit Shift Register 5-Bit Shift Register 5-Bit Shift Register	3-22 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS107AD SN74LS107AFN SN74LS107AN SN74LS109AD	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS109AFN SN74LS109AN SN74LS112AD SN74LS112AFN	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS112AN SN74LS113AD SN74LS113AFN SN74LS113AN	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop	3-17 3-17 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS114AD SN74LS114AFN SN74LS114AN SN74LS122D	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual J-K Flip-Flop One Shot Multivibrator	3-17 3-17 3-17 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS122FN SN74LS122N SN74LS123D SN74LS123FN	One Shot Multivibrator One Shot Multivibrator Dual Monostable Multivibrator Dual Monostable Multivibrator	3-20 3-20 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS123N SN74LS125AD SN74LS125AFN SN74LS125AN	Dual Monostable Multivibrator Quad 3-State Buffer Quad 3-State Buffer Quad 3-State Buffer	3-20 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS126AD SN74LS126AFN SN74LS126AN SN74LS132D	Quad 3-State Buffer Quad 3-State Buffer Quad 3-State Buffer Quad 2-Input NAND Schmitt-Trigger	3-12 3-12 3-12 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS132FN SN74LS132N SN74LS136D SN74LS136FN	Quad 2-Input NAND Schmitt-Trigger Quad 2-Input NAND Schmitt-Trigger Quad 2-Input Exclusive OR Gate OC Quad 2-Input Exclusive OR Gate OC	3-4 3-4 3-7 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS136N SN74LS137D SN74LS137FN SN74LS137N	Quad 2-Input Exclusive OR Gate OC 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer	3-7 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS138D SN74LS138FN SN74LS138N SN74LS139AD	3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer 3-8 Line Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer	3-30 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS139AFN SN74LS139AN SN74LS145D SN74LS145FN	Dual 2-4 Decoder/Demultiplexer Dual 2-4 Decoder/Demultiplexer BCD-TO-Decimal Decoder/Driver BCD-TO-Decimal Decoder/Driver	3-30 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS145N SN74LS147D SN74LS147FN SN74LS147N	BCD-TO-Decimal Decoder/Driver 10-4 Line Encoder 10-4 Line Encoder 10-4 Line Encoder	3-30 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS148D SN74LS148FN SN74LS148N SN74LS151D	8-3 Line Encoder 8-3 Line Encoder 8-3 Line Encoder 8-1 Data Selector/Multiplexer	3-29 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS151FN SN74LS151N SN74LS153D SN74LS153FN	8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer	3-29 3-29 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS153N SN74LS155AD SN74LS155AFN SN74LS155AN	Dual 4-1 Data Selector/Multiplexer Dual 1-4 Decoder Dual 1-4 Decoder Dual 1-4 Decoder	3-28 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS156D SN74LS156FN SN74LS156N SN74LS157D	Dual 1-4 Decoder OC Dual 1-4 Decoder OC Dual 1-4 Decoder OC Quad 2-1 Data Selector/Multiplexer	3-30 3-30 3-30 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS157FN SN74LS157N SN74LS158D SN74LS158FN	Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer Quad 2-1 Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS158N SN74LS160AD SN74LS160AFN SN74LS160AN	Quad 2-1 Data Selector/Multiplexer 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter	3-28 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS161AD SN74LS161AFN SN74LS161AN SN74LS162AD	4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Decade Counter	3-25 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS162AFN SN74LS162AN SN74LS163AD SN74LS163AFN	4-Bit Synchronous Decade Counter 4-Bit Synchronous Decade Counter 4-Bit Binary Counter 4-Bit Binary Counter	3-25 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS163AN	4-Bit Binary Counter	3-25	SDLD001
SN74LS164D	8-Bit Shift Register	3-22	SDLD001
SN74LS164FN	8-Bit Shift Register	3-22	SDLD001
SN74LS164N	8-Bit Shift Register	3-22	SDLD001
SN74LS165AD	8-Bit Shift Register	3-22	SDLD001
SN74LS165AFN	8-Bit Shift Register	3-22	SDLD001
SN74LS165AN	8-Bit Shift Register	3-22	SDLD001
SN74LS166AD	8-Bit Shift Register	3-22	SDLD001
SN74LS166AFN	8-Bit Shift Register	3-22	SDLD001
SN74LS166AN	8-Bit Shift Register	3-22	SDLD001
SN74LS169BD	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74LS169BFN	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74LS169BN	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74LS170D	4-by-4 Register File	3-23	SDLD001
SN74LS170FN	4-by-4 Register File	3-23	SDLD001
SN74LS170N	4-by-4 Register File	3-23	SDLD001
SN74LS173AD	Quad D-Type Register	3-24	SDLD001
SN74LS173AFN	Quad D-Type Register	3-24	SDLD001
SN74LS173AN	Quad D-Type Register	3-24	SDLD001
SN74LS174D	Hex D-Type Flip-Flop	3-18	SDLD001
SN74LS174FN	Hex D-Type Flip-Flop	3-18	SDLD001
SN74LS174N	Hex D-Type Flip-Flop	3-18	SDLD001
SN74LS175D	Quad D-Type Flip-Flop	3-18	SDLD001
SN74LS175FN	Quad D-Type Flip-Flop	3-18	SDLD001
SN74LS175N	Quad D-Type Flip-Flop	3-18	SDLD001
SN74LS181DW	4-Bit ALU	3-34	SDLD001
SN74LS181FN	4-Bit ALU	3-34	SDLD001
SN74LS181N	4-Bit ALU	3-34	SDLD001
SN74LS190D	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS190FN	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS190N	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS191D	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS191FN	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS191N	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS192D	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS192FN	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS192N	Synchronous Up/Down Decade Counter	3-25	SDLD001
SN74LS193D	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS193FN	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS193N	Synchronous Up/Down Binary Counter	3-26	SDLD001
SN74LS194AD	4-Bit Universal Shift Register	3-22	SDLD001
SN74LS194AFN	4-Bit Universal Shift Register	3-22	SDLD001
SN74LS194AN	4-Bit Universal Shift Register	3-22	SDLD001
SN74LS195AD	4-Bit Shift Register	3-22	SDLD001
SN74LS195AFN	4-Bit Shift Register	3-22	SDLD001
SN74LS195AN	4-Bit Shift Register	3-22	SDLD001
SN74LS196D	4-Bit BCD Counter	3-26	SDLD001
SN74LS196FN	4-Bit BCD Counter	3-26	SDLD001
SN74LS196N	4-Bit BCD Counter	3-26	SDLD001
SN74LS197D	4-Bit Binary Counter	3-26	SDLD001
SN74LS197FN	4-Bit Binary Counter	3-26	SDLD001
SN74LS197N	4-Bit Binary Counter	3-26	SDLD001
SN74LS221D	Dual Monostable Multivibrator	3-20	SDLD001
SN74LS221FN	Dual Monostable Multivibrator	3-20	SDLD001
SN74LS221N	Dual Monostable Multivibrator	3-20	SDLD001
SN74LS222J	FIFO Memory 16 × 4	10-9	SDVD001
SN74LS222N	FIFO Memory 16 × 4	10-9	SDVD001
SN74LS224J	FIFO Memory 16 × 4	10-9	SDVD001
SN74LS224N	FIFO Memory 16 × 4	10-9	SDVD001
SN74LS227J	FIFO Memory 16 × 4 OC	10-9	SDVD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS227N SN74LS228J SN74LS228N SN74LS240DW	FIFO Memory 16 × 4 OC FIFO Memory 16 × 4 OC FIFO Memory 16 × 4 OC Octal Buffer/Line Driver	10-9 10-9 10-9 3-12	SDVD001 SDVD001 SDVD001 SDLD001
SN74LS240FN SN74LS240N SN74LS241DW SN74LS241FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS241N SN74LS242D SN74LS242FN SN74LS242N	Octal Buffer/Line Driver Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver	3-12 3-13 3-13 3-13	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS243D SN74LS243FN SN74LS243N SN74LS244DW	Quad Bus Transceiver Quad Bus Transceiver Quad Bus Transceiver Octal Buffer/Line Driver	3-13 3-13 3-13 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS244FN SN74LS244N SN74LS245DW SN74LS245FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Bus Transceiver Octal Bus Transceiver	3-12 3-12 3-13 3-13	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS245N SN74LS247D SN74LS247FN SN74LS247N	Octal Bus Transceiver BCD-to-7-Segment Decoder BCD-to-7-Segment Decoder BCD-to-7-Segment Decoder	3-13 3-30 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS251D SN74LS251FN SN74LS251N SN74LS253D	8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 8-1 Data Selector/Multiplexer 4-1 Data Selector/Multiplexer	3-29 3-29 3-29 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS253FN SN74LS253N SN74LS257BD SN74LS257BFN	4-1 Data Selector/Multiplexer 4-1 Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS257BN SN74LS258BD SN74LS258BFN SN74LS258BN	Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer Quad 2-Input Data Selector/Multiplexer	3-28 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS259BD SN74LS259BFN SN74LS259BN SN74LS266D	8-Bit Addressable Latch 8-Bit Addressable Latch 8-Bit Addressable Latch Quad 2-Input Exclusive OR Gate OC	3-21 3-21 3-21 3-7	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS266FN SN74LS266N SN74LS273DW SN74LS273FN	Quad 2-Input Exclusive OR Gate OC Quad 2-Input Exclusive OR Gate OC Octal D-Type Flip-Flop Octal D-Type Flip-Flop	3-7 3-7 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS273N SN74LS279AD SN74LS279AFN SN74LS279AN	Octal D-Type Flip-Flop Quad Set/Reset Latch Quad Set/Reset Latch Quad Set/Reset Latch	3-18 3-20 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS280D SN74LS280FN SN74LS280N SN74LS283D	9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 9-Bit Parity Generator/Checker 4-Bit Full Adder	3-33 3-33 3-33 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS283FN SN74LS283N SN74LS290D SN74LS290FN	4-Bit Full Adder 4-Bit Full Adder Decade Counter Decade Counter	3-34 3-34 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS290N SN74LS292N SN74LS293D SN74LS293FN	Decade Counter 30-Bit Programmable Counter 4-Bit Binary Counter 4-Bit Binary Counter	3-26 3-27 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS293N	4-Bit Binary Counter	3-26	SDLD001
SN74LS294N	16-Bit Programmable Counter	3-27	SDLD001
SN74LS295BD	4-Bit Shift Register	3-22	SDLD001
SN74LS295BFN	4-Bit Shift Register	3-22	SDLD001
SN74LS295BN	4-Bit Shift Register	3-22	SDLD001
SN74LS297N	Digital Phase Lock Loop	3-31	SDLD001
SN74LS298D	Quad 2-Input Multiplexer	3-28	SDLD001
SN74LS298FN	Quad 2-Input Multiplexer	3-28	SDLD001
SN74LS298N	Quad 2-Input Multiplexer	3-28	SDLD001
SN74LS299DW	8-Bit Shift Register	3-22	SDLD001
SN74LS299FN	8-Bit Shift Register	3-22	SDLD001
SN74LS299N	8-Bit Shift Register	3-22	SDLD001
SN74LS321D	Crystal Controlled Oscillator	3-31	SDLD001
SN74LS321FN	Crystal Controlled Oscillator	3-31	SDLD001
SN74LS321N	Crystal Controlled Oscillator	3-31	SDLD001
SN74LS322ADW	8-Bit Shift Register	3-22	SDLD001
SN74LS322AFN	8-Bit Shift Register	3-22	SDLD001
SN74LS322AN	8-Bit Shift Register	3-22	SDLD001
SN74LS323DW	8-Bit Shift/Storage Register	3-22	SDLD001
SN74LS323FN	8-Bit Shift/Storage Register	3-22	SDLD001
SN74LS323N	8-Bit Shift/Storage Register	3-22	SDLD001
SN74LS348D	8-3 Line Encoder	3-29	SDLD001
SN74LS348FN	8-3 Line Encoder	3-29	SDLD001
SN74LS348N	8-3 Line Encoder	3-29	SDLD001
SN74LS352D	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS352FN	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS352N	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS353D	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS353FN	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS353N	Dual Data Selector/Multiplexer	3-28	SDLD001
SN74LS354DW	8-1 Selector/Multiplexer Register	3-29	SDLD001
SN74LS354FN	8-1 Selector/Multiplexer Register	3-29	SDLD001
SN74LS354N	8-1 Selector/Multiplexer Register	3-29	SDLD001
SN74LS356DW	8-1 Selector/Multiplexer Register	3-24	SDLD001
SN74LS356FN	8-1 Selector/Multiplexer Register	3-24	SDLD001
SN74LS356N	8-1 Selector/Multiplexer Register	3-24	SDLD001
SN74LS365AD	Hex Bus Driver	3-10	SDLD001
SN74LS365AFN	Hex Bus Driver	3-10	SDLD001
SN74LS365AN	Hex Bus Driver	3-10	SDLD001
SN74LS366AD	Hex Bus Driver	3-10	SDLD001
SN74LS366AFN	Hex Bus Driver	3-10	SDLD001
SN74LS366AN	Hex Bus Driver	3-10	SDLD001
SN74LS367AD	Hex Bus Driver	3-10	SDLD001
SN74LS367AFN	Hex Bus Driver	3-10	SDLD001
SN74LS367AN	Hex Bus Driver	3-10	SDLD001
SN74LS368AD	Hex Bus Driver	3-10	SDLD001
SN74LS368AFN	Hex Bus Driver	3-10	SDLD001
SN74LS368AN	Hex Bus Driver	3-10	SDLD001
SN74LS373DW	Octal D-Type Latch	3-21	SDLD001
SN74LS373FN	Octal D-Type Latch	3-21	SDLD001
SN74LS373N	Octal D-Type Latch	3-21	SDLD001
SN74LS374DW	Octal D-Type Flip-Flop	3-18	SDLD001
SN74LS374FN	Octal D-Type Flip-Flop	3-18	SDLD001
SN74LS374N	Octal D-Type Flip-Flop	3-18	SDLD001
SN74LS375D	4-Bit Bistable Latch	3-20	SDLD001
SN74LS375FN	4-Bit Bistable Latch	3-20	SDLD001
SN74LS375N	4-Bit Bistable Latch	3-20	SDLD001
SN74LS377DW	Octal D-Type Flip-Flop	3-18	SDLD001
SN74LS377FN	Octal D-Type Flip-Flop	3-18	SDLD001
SN74LS377N	Octal D-Type Flip-Flop	3-18	SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS378D SN74LS378FN SN74LS378N SN74LS379D	Hex D-Type Flip-Flop Hex D-Type Flip-Flop Hex D-Type Flip-Flop Quad D-Type Flip-Flop	3-18 3-18 3-18 3-18	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS379FN SN74LS379N SN74LS381ADW SN74LS381AFN	Quad D-Type Flip-Flop Quad D-Type Flip-Flop ALU/Function Generator ALU/Function Generator	3-18 3-18 3-34 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS381AN SN74LS382ADW SN74LS382AFN SN74LS382AN	ALU/Function Generator ALU/Function Generator ALU/Function Generator ALU/Function Generator	3-34 3-34 3-34 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS390D SN74LS390FN SN74LS390N SN74LS393D	4-Bit Decade Counter 4-Bit Decade Counter 4-Bit Decade Counter 4-Bit Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS393FN SN74LS393N SN74LS395AD SN74LS395AFN	4-Bit Binary Counter 4-Bit Binary Counter 4-Bit Cascadable Shift Register 4-Bit Cascadable Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS395AN SN74LS399D SN74LS399FN SN74LS399N	4-Bit Cascadable Shift Register Quad 2-Input Multiplexer with Storage Quad 2-Input Multiplexer with Storage Quad 2-Input Multiplexer with Storage	3-22 3-28 3-28 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS423D SN74LS423FN SN74LS423N SN74LS442DW	Retriggerable Multivibrator Retriggerable Multivibrator Retriggerable Multivibrator Bus Transceiver	3-20 3-20 3-20 3-13	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS442FN SN74LS442N SN74LS465DW SN74LS465FN	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	3-13 3-13 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS465N SN74LS466DW SN74LS466FN SN74LS466N	Bus Transceiver Octal Buffer Octal Buffer Octal Buffer	3-12 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS540DW SN74LS540FN SN74LS540N SN74LS541DW	Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver Octal Buffer/Line Driver	3-12 3-12 3-12 3-12	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS541FN SN74LS541N SN74LS590D SN74LS590FN	Octal Buffer/Line Driver Octal Buffer/Line Driver Binary Counter with Output Register Binary Counter with Output Register	3-12 3-12 3-27 3-27	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS590N SN74LS592D SN74LS592FN SN74LS592N	Binary Counter with Output Register Binary Counter with Input Register Binary Counter with Input Register Binary Counter with Input Register	3-27 3-27 3-27 3-27	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS593DW SN74LS593FN SN74LS593N SN74LS595D	Binary Counter with Input Register Binary Counter with Input Register Binary Counter with Input Register Shift Register with Output Latch	3-27 3-27 3-27 3-23	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS595FN SN74LS595N SN74LS597D SN74LS597FN	Shift Register with Output Latch Shift Register with Output Latch Shift Register with Input Latch Shift Register with Input Latch	3-23 3-23 3-23 3-23	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS597N SN74LS598DW SN74LS598FN SN74LS598N	Shift Register with Input Latch Shift Register with Input Latch Shift Register with Input Latch Shift Register with Input Latch	3-23 3-23 3-23 3-23	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS599D SN74LS599FN SN74LS599N SN74LS607FN	Shift Register with Output Latch Shift Register with Output Latch Shift Register with Output Latch 16-to-8 Multiplexed Latch	3-23 3-23 3-23 3-28	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS607N SN74LS610FN SN74LS610JD SN74LS610N	16-to-8 Multiplexed Latch Memory Mapper with Latch Memory Mapper with Latch Memory Mapper with Latch	3-28 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS611FN SN74LS611JD SN74LS611N SN74LS612FN	Memory Mapper with Latch Memory Mapper with Latch Memory Mapper with Latch Memory Mapper	3-31 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS612JD SN74LS612N SN74LS613FN SN74LS613JD	Memory Mapper Memory Mapper Memory Mapper Memory Mapper	3-31 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS613N SN74LS623DW SN74LS623FN SN74LS623N	Memory Mapper Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-31 3-16 3-15 3-15	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS624D SN74LS624FN SN74LS624N SN74LS625D	Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator	3-31 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS625FN SN74LS625N SN74LS628D SN74LS628FN	Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator	3-31 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS628N SN74LS629D SN74LS629FN SN74LS629N	Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator Voltage-Controlled Oscillator	3-31 3-31 3-31 3-31	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS630N SN74LS640DW SN74LS640FN SN74LS640N	Error Detection and Correction Circuit Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-33 3-13 3-13 3-13	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS640-1DW SN74LS640-1FN SN74LS640-1N SN74LS641DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-13 3-13 3-13 3-11	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS641FN SN74LS641N SN74LS641-1DW SN74LS641-1FN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS641-1N SN74LS642DW SN74LS642FN SN74LS642N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS642-1DW SN74LS642-1FN SN74LS642-1N SN74LS644DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS644FN SN74LS644N SN74LS644-1DW SN74LS644-1N	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-11 3-11 3-11 3-11	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS645DW SN74LS645FN SN74LS645N SN74LS645-1DW	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	3-15 3-15 3-15 3-15	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74LS645-1FN SN74LS645-1N SN74LS646DW SN74LS646FN	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-15 3-15 3-14 3-14	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS646NT SN74LS648DW SN74LS648FN SN74LS648NT	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS651DW SN74LS651FN SN74LS651NT SN74LS652DW	Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register Octal Bus Transceiver and Register	3-14 3-14 3-14 3-14	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS652FN SN74LS652NT SN74LS669D SN74LS669FN	Octal Bus Transceiver and Register Octal Bus Transceiver and Register 4-Bit UP/Down Counter 4-Bit Up/Down Counter	3-14 3-14 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS669N SN74LS670D SN74LS670FN SN74LS670N	4-Bit Up/Down Counter 4-by-4 Register File 4-by-4 Register File 4-by-4 Register File	3-25 3-23 3-23 3-23	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS674DW SN74LS674FN SN74LS674N SN74LS681DW	16-Bit Shift Register 16-Bit Shift Register 16-Bit Shift Register 4-Bit Binary Accumulator	3-22 3-22 3-22 3-34	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS681FN SN74LS681N SN74LS682DW SN74LS682FN	4-Bit Binary Accumulator 4-Bit Binary Accumulator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-34 3-34 3-32 3-32	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS682N SN74LS684DW SN74LS684FN SN74LS684N	8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator 8-Bit Identity Comparator	3-32 3-32 3-32 3-32	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS688DW SN74LS688FN SN74LS688N SN74LS697DW	8-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Magnitude Comparator Synchronous Up/Down Binary Counter	3-32 3-32 3-32 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS697FN SN74LS697N SN74LS699DW SN74LS699FN	Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter Synchronous Up/Down Binary Counter	3-26 3-26 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74LS699N SN74S00D SN74S00FN SN74S00N	Synchronous Up/Down Binary Counter Quad 2-Input NAND Gate Quad 2-Input NAND Gate Quad 2-Input NAND Gate	3-26 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN74S02D SN74S02FN SN74S02N SN74S03D	Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NOR Gate Quad 2-Input NAND Gate OC	3-6 3-6 3-6 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN74S03FN SN74S03N SN74S04D SN74S04FN	Quad 2-Input NAND Gate OC Quad 2-Input NAND Gate OC Hex Inverter Hex Inverter	3-5 3-5 3-9 3-9	SDLD001 SDLD001 SDLD001 SDLD001
SN74S04N SN74S05D SN74S05FN SN74S05N	Hex Inverter Hex Inverter OC Hex Inverter OC Hex Inverter OC	3-9 3-9 3-9 3-9	SDLD001 SDLD001 SDLD001 SDLD001
SN74S08D SN74S08FN SN74S08N SN74S09D	Quad 2-Input AND Gate Quad 2-Input AND Gate Quad 2-Input AND Gate Quad 2-Input AND Gate OC	3-5 3-5 3-5 3-5	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74S09FN	Quad 2-Input AND Gate OC	3-5	SDLD001
SN74S09N	Quad 2-Input AND Gate OC	3-5	SDLD001
SN74S10D	Triple 3-Input NAND Gate	3-4	SDLD001
SN74S10FN	Triple 3-Input NAND Gate	3-4	SDLD001
SN74S10N	Triple 3-Input NAND Gate	3-4	SDLD001
SN74S11D	Triple 3-Input AND Gate	3-5	SDLD001
SN74S11FN	Triple 3-Input AND Gate	3-5	SDLD001
SN74S11N	Triple 3-Input AND Gate	3-5	SDLD001
SN74S15D	Triple 3-Input AND Gate OC	3-5	SDLD001
SN74S15FN	Triple 3-Input AND Gate OC	3-5	SDLD001
SN74S15N	Triple 3-Input AND Gate OC	3-5	SDLD001
SN74S20D	Dual 4-Input NAND Gate	3-4	SDLD001
SN74S20FN	Dual 4-Input NAND Gate	3-4	SDLD001
SN74S20N	Dual 4-Input NAND Gate	3-4	SDLD001
SN74S22D	Dual 4-Input NAND Gate OC	3-5	SDLD001
SN74S22FN	Dual 4-Input NAND Gate OC	3-5	SDLD001
SN74S22N	Dual 4-Input NAND Gate OC	3-5	SDLD001
SN74S30D	8-Input NAND Gate	3-4	SDLD001
SN74S30FN	8-Input NAND Gate	3-4	SDLD001
SN74S30N	8-Input NAND Gate	3-4	SDLD001
SN74S32D	Quad 2-Input OR Gate	3-6	SDLD001
SN74S32FN	Quad 2-Input OR Gate	3-6	SDLD001
SN74S32N	Quad 2-Input OR Gate	3-6	SDLD001
SN74S37D	Quad 2-Input NAND Buffer	3-4	SDLD001
SN74S37FN	Quad 2-Input NAND Buffer	3-4	SDLD001
SN74S37N	Quad 2-Input NAND Buffer	3-4	SDLD001
SN74S38D	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN74S38FN	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN74S38N	Quad 2-Input NAND Buffer OC	3-4	SDLD001
SN74S40D	Dual 4-Input NAND Buffer	3-4	SDLD001
SN74S40FN	Dual 4-Input NAND Buffer	3-4	SDLD001
SN74S40N	Dual 4-Input NAND Buffer	3-4	SDLD001
SN74S51D	Dual AND-OR-Invert Gate	3-7	SDLD001
SN74S51FN	Dual AND-OR-Invert Gate	3-7	SDLD001
SN74S51N	Dual AND-OR-Invert Gate	3-7	SDLD001
SN74S64D	AND-OR-Invert Gate	3-7	SDLD001
SN74S64FN	AND-OR-Invert Gate	3-7	SDLD001
SN74S64N	AND-OR-Invert Gate	3-7	SDLD001
SN74S65D	AND-OR-Invert Gate OC	3-7	SDLD001
SN74S65FN	AND-OR-Invert Gate OC	3-7	SDLD001
SN74S65N	AND-OR-Invert Gate OC	3-7	SDLD001
SN74S74D	Dual D-Type Flip-Flop	3-17	SDLD001
SN74S74FN	Dual D-Type Flip-Flop	3-17	SDLD001
SN74S74N	Dual D-Type Flip-Flop	3-17	SDLD001
SN74S85D	4-Bit Magnitude Comparator	3-32	SDLD001
SN74S85FN	4-Bit Magnitude Comparator	3-32	SDLD001
SN74S85N	4-Bit Magnitude Comparator	3-32	SDLD001
SN74S86D	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN74S86FN	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN74S86N	Quad 2-Input Exclusive OR Gate	3-7	SDLD001
SN74S112AD	Dual J-K Flip-Flop	3-17	SDLD001
SN74S112AFN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S112AN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S113AD	Dual J-K Flip-Flop	3-17	SDLD001
SN74S113AFN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S113AN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S114AD	Dual J-K Flip-Flop	3-17	SDLD001
SN74S114AFN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S114AN	Dual J-K Flip-Flop	3-17	SDLD001
SN74S124D	Dual Voltage-Controlled Oscillator	3-31	SDLD001



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74S124FN	Dual Voltage-Controlled Oscillator	3-31	SDLD001
SN74S124N	Dual Voltage-Controlled Oscillator	3-31	SDLD001
SN74S132D	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN74S132FN	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN74S132N	Quad 2-Input NAND Schmitt-Trigger	3-4	SDLD001
SN74S133D	13-Input NAND Gate	3-4	SDLD001
SN74S133FN	13-Input NAND Gate	3-4	SDLD001
SN74S133N	13-Input NAND Gate	3-4	SDLD001
SN74S134D	12-Input NAND Gate	3-4	SDLD001
SN74S134FN	12-Input NAND Gate	3-4	SDLD001
SN74S134N	12-Input NAND Gate	3-4	SDLD001
SN74S135D	Quad Exclusive OR/NOR Gate	3-7	SDLD001
SN74S135FN	Quad Exclusive OR/NOR Gate	3-7	SDLD001
SN74S135N	Quad Exclusive OR/NOR Gate	3-7	SDLD001
SN74S138AD	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN74S138AFN	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN74S138AN	3-8 Line Decoder/Demultiplexer	3-30	SDLD001
SN74S139AD	Dual 2-4 Decoder/Demultiplexer	3-30	SDLD001
SN74S139AFN	Dual 2-4 Decoder/Demultiplexer	3-30	SDLD001
SN74S139AN	Dual 2-4 Decoder/Demultiplexer	3-30	SDLD001
SN74S140D	Dual 50 Ohm Line Driver	3-15	SDLD001
SN74S140FN	Dual 50 Ohm Line Driver	3-15	SDLD001
SN74S140N	Dual 50 Ohm Line Driver	3-15	SDLD001
SN74S151D	8-1 Data Select/Multiplexer	3-29	SDLD001
SN74S151FN	8-1 Data Select/Multiplexer	3-29	SDLD001
SN74S151N	8-1 Data Select/Multiplexer	3-29	SDLD001
SN74S153D	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S153FN	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S153N	Dual 4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S157D	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S157FN	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S157N	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S158D	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S158FN	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S158N	Quad 2-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S162D	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN74S162FN	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN74S162N	4-Bit Synchronous Decade Counter	3-25	SDLD001
SN74S163D	4-Bit Synchronous Binary Counter	3-25	SDLD001
SN74S163FN	4-Bit Synchronous Binary Counter	3-25	SDLD001
SN74S163N	4-Bit Synchronous Binary Counter	3-25	SDLD001
SN74S169D	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74S169FN	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74S169N	4-Bit Synchronous Binary Counter	3-26	SDLD001
SN74S174D	Hex D-Type Flip-Flop	3-18	SDLD001
SN74S174FN	Hex D-Type Flip-Flop	3-18	SDLD001
SN74S174N	Hex D-Type Flip-Flop	3-18	SDLD001
SN74S175D	Quad D-Type Flip-Flop	3-18	SDLD001
SN74S175FN	Quad D-Type Flip-Flop	3-18	SDLD001
SN74S175N	Quad D-Type Flip-Flop	3-18	SDLD001
SN74S181DW	4-Bit ALU	3-34	SDLD001
SN74S181FN	4-Bit ALU	3-34	SDLD001
SN74S181N	4-Bit ALU	3-34	SDLD001
SN74S182D	Look-Ahead Carry Generator	3-34	SDLD001
SN74S182FN	Look-Ahead Carry Generator	3-34	SDLD001
SN74S182N	Look-Ahead Carry Generator	3-34	SDLD001
SN74S194D	4-Bit Universal Shift Register	3-22	SDLD001
SN74S194FN	4-Bit Universal Shift Register	3-22	SDLD001
SN74S194N	4-Bit Universal Shift Register	3-22	SDLD001
SN74S195D	4-Bit Shift Register	3-22	SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74S195FN	4-Bit Shift Register	3-22	SDLD001
SN74S195N	4-Bit Shift Register	3-22	SDLD001
SN74S196D	4-Bit BCD Counter	3-26	SDLD001
SN74S196FN	4-Bit BCD Counter	3-26	SDLD001
SN74S196N	4-Bit BCD Counter	3-26	SDLD001
SN74S197D	4-Bit Binary Counter	3-26	SDLD001
SN74S197FN	4-Bit Binary Counter	3-26	SDLD001
SN74S197N	4-Bit Binary Counter	3-26	SDLD001
SN74S225J	FIFO 16 × 5	10-9	SDVD001
SN74S225N	FIFO 16 × 5	10-9	SDVD001
SN74S240DW	Octal Buffer/Line Driver	3-12	SDLD001
SN74S240FN	Octal Buffer/Line Driver	3-12	SDLD001
SN74S240N	Octal Buffer/Line Driver	3-12	SDLD001
SN74S241DW	Octal Buffer/Line Driver	3-12	SDLD001
SN74S241FN	Octal Buffer/Line Driver	3-12	SDLD001
SN74S241N	Octal Buffer/Line Driver	3-12	SDLD001
SN74S244DW	Octal Buffer/Line Driver	3-12	SDLD001
SN74S244FN	Octal Buffer/Line Driver	3-12	SDLD001
SN74S244N	Octal Buffer/Line Driver	3-12	SDLD001
SN74S251D	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN74S251FN	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN74S251N	8-1 Data Selector/Multiplexer	3-29	SDLD001
SN74S253D	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S253FN	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S253N	4-1 Data Selector/Multiplexer	3-28	SDLD001
SN74S257D	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN74S257FN	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN74S257N	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN74S258D	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN74S258FN	Quad 2-Input Data Selector/Multiplexer	3-28	SDLD001
SN74S258N	Quad 2-Input Multiplexer	3-28	SDLD001
SN74S260D	Dual 5-Input NOR Gate	3-6	SDLD001
SN74S260FN	Dual 5-Input NOR Gate	3-6	SDLD001
SN74S260N	Dual 5-Input NOR Gate	3-6	SDLD001
SN74S280D	9-Bit Parity Generator/Checker	3-33	SDLD001
SN74S280FN	9-Bit Parity Generator/Checker	3-33	SDLD001
SN74S280N	9-Bit Parity Generator/Checker	3-33	SDLD001
SN74S283D	4-Bit Full Adder	3-34	SDLD001
SN74S283FN	4-Bit Full Adder	3-34	SDLD001
SN74S283N	4-Bit Full Adder	3-34	SDLD001
SN74S299DW	8-Bit Shift Register	3-22	SDLD001
SN74S299FN	8-Bit Shift Register	3-22	SDLD001
SN74S299N	8-Bit Shift Register	3-22	SDLD001
SN74S373DW	Octal D-Type Latch	3-21	SDLD001
SN74S373FN	Octal D-Type Latch	3-21	SDLD001
SN74S373N	Octal D-Type Latch	3-21	SDLD001
SN74S374DW	Octal D-Type Flip-Flop	3-18	SDLD001
SN74S374FN	Octal D-Type Flip-Flop	3-18	SDLD001
SN74S374N	Octal D-Type Flip-Flop	3-18	SDLD001
SN74S381DW	ALU/Function Generator	3-34	SDLD001
SN74S381FN	ALU/Function Generator	3-34	SDLD001
SN74S381N	ALU/Function Generator	3-34	SDLD001
SN7400D	Quad 2-Input NAND Gate	3-4	SDLD001
SN7400FN	Quad 2-Input NAND Gate	3-4	SDLD001
SN7400N	Quad 2-Input NAND Gate	3-4	SDLD001
SN7401N	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN7402N	Quad 2-Input NOR Gate	3-6	SDLD001
SN7403N	Quad 2-Input NAND Gate OC	3-5	SDLD001
SN7404N	Hex Inverter	3-9	SDLD001
SN7405N	Hex Inverter OC	3-9	SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN7406D SN7406FN SN7406N SN7407D	Hex Inverter OC Hex Inverter OC Hex Inverter OC Hex Buffer/Driver OC	3-9 3-9 3-9 3-10	SDLD001 SDLD001 SDLD001 SDLD001
SN7407FN SN7407N SN7408N SN7409N	Hex Buffer/Driver OC Hex Buffer/Driver OC Quad 2-Input AND Gate Quad 2-Input AND Gate OC	3-10 3-10 3-5 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN7410N SN7412N SN7413N SN7414D	Triple 3-Input NAND Gate Triple 3-Input NAND Gate OC Dual 4-Input NAND Schmitt-Trigger Hex Schmitt-Trigger Inverter	3-4 3-5 3-4 3-9	SDLD001 SDLD001 SDLD001 SDLD001
SN7414N SN7416D SN7416N SN7417D	Hex Schmitt-Trigger Inverter Hex Inverter/Driver Hex Inverter/Driver Hex Buffer/Driver OC	3-9 3-9 3-9 3-10	SDLD001 SDLD001 SDLD001 SDLD001
SN7417FN SN7417N SN7420N SN7422N	Hex Buffer/Driver OC Hex Buffer/Driver OC Dual 4-Input NAND Gate Dual 4-Input NAND Gate OC	3-10 3-10 3-4 3-5	SDLD001 SDLD001 SDLD001 SDLD001
SN7423N SN7425D SN7425N SN7426N	Dual 4-Input NOR Gate with Strobe Dual 4-Input NOR Gate Dual 4-Input NOR Gate Quad 2-Input NAND Gate	3-8 3-6 3-6 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN7427N SN7428N SN7430N SN7432N	Triple 3-Input NOR Gate Quad 2-Input NOR Buffer 8-Input NAND Gate Quad 2-Input OR Gate	3-6 3-6 3-4 3-6	SDLD001 SDLD001 SDLD001 SDLD001
SN7433N SN7437N SN7438D SN7438N	Quad 2-Input NOR Buffer OC Quad 2-Input NAND Buffer Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC	3-6 3-4 3-4 3-4	SDLD001 SDLD001 SDLD001 SDLD001
SN7439D SN7439N SN7440N SN7442AN	Quad 2-Input NAND Buffer OC Quad 2-Input NAND Buffer OC Dual 4-Input NAND Buffer BCD-to-Decimal Decoder	3-4 3-4 3-4 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN7445N SN7446AN SN7447AN SN7450N	BCD-to-Decimal Decoder/Driver BCD-7-Segment Decoder/Driver BCD-7-Segment Decoder/Driver Dual AND-OR-Invert Gate	3-30 3-30 3-30 3-8	SDLD001 SDLD001 SDLD001 SDLD001
SN7451N SN7454N SN7470N SN7473N	Dual AND-OR-Invert Gate AND-OR-Invert Gate AND-Gated J-K Flip-Flop Dual J-K Flip-Flop	3-7 3-7 3-17 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN7474D SN7474N SN7475N SN7476N	Dual D-Type Flip-Flop Dual D-Type Flip-Flop 4-Bit Latch Dual J-K Flip-Flop	3-17 3-17 3-20 3-17	SDLD001 SDLD001 SDLD001 SDLD001
SN7483AN SN7485N SN7486N SN7492AN	4-Bit Binary Adder 4-Bit Magnitude Comparator Quad 2-Input Exclusive OR Gate Divide-by-12 Counter	3-34 3-32 3-7 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN7493AN SN7495AN SN7496N SN7497N	4-Bit Binary Counter 4-Bit Shift Register 5-Bit Shift Register Binary Rate Multiplier	3-26 3-22 3-22 3-27	SDLD001 SDLD001 SDLD001 SDLD001
SN74107N SN74109N SN74116N SN74120N	Dual J-K Flip-Flop Dual J-K Flip-Flop Dual 4-Bit Latch Dual Pulse Synchronizer/Driver	3-17 3-17 3-21 3-16	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74121D SN74121N SN74122N SN74123N	One-Shot Multivibrator One-Shot Multivibrator One-Shot Multivibrator Dual Monostable Multivibrator	3-20 3-20 3-20 3-20	SDLD001 SDLD001 SDLD001 SDLD001
SN74125N SN74126N SN74128D SN74128N	Quad 3-State Buffer Quad 3-State Buffer 50 Ohm Line Driver 50 Ohm Line Driver	3-12 3-12 3-16 3-16	SDLD001 SDLD001 SDLD001 SDLD001
SN74132N SN74136N SN74143N SN74145N	Quad 2-Input NAND Schmitt-Trigger Quad 2-Input Exclusive OR Gate OC 4-Bit Counter/Latch/Lamp Driver BCD-to-Decimal Decoder/Driver	3-4 3-7 3-31 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74147N SN74148N SN74150DW SN74150N	10-to-4 Line Encoder 8-to-3 Line Encoder Data Selector/Multiplexer Data Selector/Multiplexer	3-29 3-29 3-29 3-29	SDLD001 SDLD001 SDLD001 SDLD001
SN74151AN SN74153N SN74154DW SN74154N	8-1 Data Selector/Multiplexer Dual 4-1 Data Selector/Multiplexer 4-to-16 Line Decoder 4-to-16 Line Decoder	3-29 3-28 3-30 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74155N SN74156N SN74157N SN74159N	Dual 1-4 Decoder Dual 1-4 Decoder OC Quad 2-1 Data Selector/Multiplexer 4-16 Line Decoder/Demultiplexer	3-30 3-30 3-28 3-30	SDLD001 SDLD001 SDLD001 SDLD001
SN74160N SN74161D SN74161FN SN74161N	4-Bit Synchronous Decade Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter 4-Bit Synchronous Binary Counter	3-25 3-25 3-25 3-25	SDLD001 SDLD001 SDLD001 SDLD001
SN74163N SN74164N SN74165N SN74166N	4-Bit Binary Counter 8-Bit Shift Register 8-Bit Shift Register 8-Bit Shift Register	3-25 3-22 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74167N SN74170N SN74172N SN74173N	Synchronous Rate Multiplexer 4-BY-4 Register File 16-Bit Register File 4-Bit D-Type Register	3-27 3-23 3-23 3-24	SDLD001 SDLD001 SDLD001 SDLD001
SN74174N SN74175N SN74176N SN74177N	Hex D-Type Flip-Flop Quad D-Type Flip-Flop 4-Bit BCD Counter 4-Bit Binary Counter	3-18 3-18 3-26 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74180D SN74180N SN74190N SN74191N	Parity Generator/Checker Parity Generator/Checker Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter	3-33 3-33 3-25 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74192N SN74193N SN74194N SN74195N	Synchronous Up/Down Decade Counter Synchronous Up/Down Binary Counter 4-Bit Universal Shift Register 4-Bit Shift Register	3-25 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74196N SN74197N SN74198N SN74199N	4-Bit BCD Counter 4-Bit Binary Counter 8-Bit Shift Register 8-Bit Shift Register	3-26 3-26 3-22 3-22	SDLD001 SDLD001 SDLD001 SDLD001
SN74221N SN74251N SN74259N SN74265N	Dual Monostable Multivibrator 8-1 Data Selector/Multiplexer 8-Bit Addressable Latch Quad AND/NAND Gate	3-20 3-29 3-21 3-8	SDLD001 SDLD001 SDLD001 SDLD001
SN74273N SN74276N SN74279N SN74283N	Octal D-Type Flip-Flop Quad J-K Flip-Flop Quad Set/Reset Latch 4-Bit Full Adder	3-18 3-18 3-20 3-34	SDLD001 SDLD001 SDLD001 SDLD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN74293N SN74298N SN74365AN SN74366AN	4-Bit Binary Counter Quad 2-Input Multiplexer Hex Bus Driver Hex Bus Driver	3-26 3-28 3-10 3-10	SDLD001 SDLD001 SDLD001 SDLD001
SN74367AN SN74368AN SN74376N SN74390N	Hex Bus Driver Hex Bus Driver Quad J-K Flip-Flop 4-Bit Decade Counter	3-10 3-10 3-18 3-26	SDLD001 SDLD001 SDLD001 SDLD001
SN74393N SN75ALS056DW SN75ALS056N SN75ALS057DW	4-Bit Binary Counter Bus Transceiver Bus Transceiver Bus Transceiver	3-26 6-5 6-5 6-5	SDLD001 SLLS028A SLLS028A SLLS028A
SN75ALS057N SN75ALS121D SN75ALS121J SN75ALS121N	Bus Transceiver Line Driver Line Driver Line Driver	6-5 6-2 6-2 6-2	SLLS028A SLLS030 SLLS030 SLLS030
SN75ALS123D SN75ALS123J SN75ALS123N SN75ALS126D	Line Receiver Line Receiver Line Receiver Line Driver	6-3 6-3 6-3 6-2	SLLS031 SLLS031 SLLS031 SLYD002
SN75ALS126N SN75ALS127D SN75ALS127J SN75ALS127N	Line Driver Line Receiver Line Receiver Line Receiver	6-2 6-3 6-3 6-3	SLYD002 SLLS027 SLLS027 SLLS027
SN75ALS130D SN75ALS130N SN75ALS160 SN75ALS161DW	Line Driver Line Driver Bus Transceiver Bus Transceiver	6-2 6-2 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75ALS161J SN75ALS161N SN75ALS162DW SN75ALS162N	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75ALS163DW SN75ALS163J SN75ALS163N SN75ALS164DW	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75ALS164N SN75ALS165DW SN75ALS165J SN75ALS165N	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75ALS192D SN75ALS192J SN75ALS192N SN75ALS193J	Line Driver Line Driver Line Driver Line Receiver	6-2 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75ALS194D SN75ALS194J SN75ALS194N SN75ALS195J	Line Driver Line Driver Line Driver Line Receiver	6-2 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN28827 SN28828 SN55107AFK SN55107AJ	Sonar Ranging Module Sonar Ranging Module Line Receiver Line Receiver	7-22 7-22 6-4,6-11 6-4,6-11	SLYD001 SLSS001 SLYD002 SLYD002
SN55107BFK SN55107BJ SN55108AFK SN55108AJ	Line Receiver Line Receiver Line Receiver Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN55108BFK SN55108BJ SN55109AFK SN55109AJ	Line Receiver Line Receiver Line Driver Line Driver	6-4,6-11 6-4,6-11 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN55110AFK SN55110AJ SN55113FK SN55113J	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN55113W SN55114FK SN55114J SN55114W	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002* SLYD002 SLYD002 SLYD002*
SN55115FK SN55115J SN55115W SN55116FK	Line Receiver Line Receiver Line Receiver Line Transceiver	6-4 6-4 6-4 6-5	SLYD002 SLYD002 SLYD002* SLYD002
SN55116J SN55117FK SN55117JG SN55118FK	Line Transceiver Line Transceiver Line Transceiver Line Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN55118J SN55119FK SN55119JG SN55121FK	Line Transceiver Line Transceiver Line Transceiver Line Driver	6-5 6-5 6-5 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN55121J SN55122FK SN55122J SN55138FK	Line Driver Line Receiver Line Receiver Bus Transceiver	6-2 6-3 6-3 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN55138J SN55150FK SN55150JG SN55152FK	Bus Transceiver Line Driver Line Driver Line Receiver	6-5 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN55152J SN55154FK SN55154J SN55157FK	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002*
SN55157JG SN55173FK SN55173J SN55182FK	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-4	SLYD002 SLYD002* SLYD002* SLYD002
SN55182J SN55182W SN55183FK SN55183J	Line Receiver Line Receiver Line Driver Line Driver	6-4 6-4 6-2 6-2	SLYD002 SLYD002* SLYD002 SLYD002
SN55183W SN55188FK SN55188J SN55189AFK	Line Driver Line Driver Line Driver Line Receiver	6-2 6-2 6-2 6-3	SLYD002* SLYD002 SLYD002 SLYD002
SN55189AJ SN55189FK SN55189J SN55234J	Line Receiver Line Receiver Line Receiver Sense Amplifier	6-3 6-3 6-3 —	SLYD002 SLYD002 SLYD002 SLYD002
SN55234W SN55325J SN55325W SN55326J	Sense Amplifier Memory Core Driver Memory Core Driver Memory Core Driver	— — — —	SLYD002* SLYD002 SLYD002* SLYD002
SN55326W SN55327J SN55327W SN55365FK	Memory Core Driver Memory Core Driver Memory Core Driver Quad NAND TTL-to-MOS Driver	— — — —	SLYD002* SLYD002 SLYD002* LCC5921
SN55365J SN55426BJ SN55427BJ SN55450BFK	Quad NAND TTL-to-MOS Driver AC Plasma Display Driver AC Plasma Display Driver Actuator/Driver	— — — —	LCC5921 SLYD002 SLYD002 SLYD002

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN55450BJ SN55451BFK SN55451BJG SN55452BFK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	— 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN55452BJG SN55453BFK SN55453BJG SN55454BFK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN55454BJG SN55461FK SN55461JG SN55462FK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN55462JG SN55463FK SN55463JG SN55464FK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 —	SLYD002 SLYD002 SLYD002 SLYD002
SN55464JG SN55471FK SN55471JG SN55472FK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	— 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN55472JG SN55473FK SN55473JG SN55474FK	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 —	SLYD002 SLYD002 SLYD002 SLYD002
SN55474JG SN55500EFD SN55500EJD SN55501EFD	Actuator/Driver AC Plasma Display Driver AC Plasma Display Driver AC Plasma Display Driver	— 6-8 6-8 6-8	SLYD002 SLYD002 SLYD002 SLYD002
SN55501EJD SN55551FD SN55552FD SN55553FD	AC Plasma Display Driver Display Driver Display Driver Display Driver	6-8 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN55554FD SN65176BD SN65176BP SN65500EN	Display Driver Bus Transceiver Bus Transceiver Display Driver	6-6 6-5 6-5 6-8	SLYD002 SLYD002 SLYD002 SLYD002
SN65500FN SN65501EFN SN65501EN SN65508FN	Display Driver Display Driver Display Driver Display Driver	6-8 6-8 6-8 —	SLYD002 SLYD002 SLYD002 SLYD002
SN65509FN SN65512BN SN65513BN SN65518FN	Display Driver Display Driver Display Driver Display Driver	— 6-7 6-7 6-7	SLYD002 SLYD002 SLYD002 SLYD002
SN65518N SN65551FN SN65551N SN65552FN	Display Driver Display Driver Display Driver Display Driver	6-7 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN65552N SN65553FN SN65553N SN65554FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN65554N SN65555FN SN65555N SN65556FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN65556N SN65563FN SN65564FN SN65567FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN65568FN SN75061DW SN75061N SN75062DW	Display Driver Driver/Receiver Pair with Squelch Driver/Receiver Pair with Squelch Driver/Receiver Pair with Squelch	6-6 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLLS029
SN75062N SN75064NE SN75065NE SN75066NE	Driver/Receiver Pair with Squelch Actuator/Driver Actuator/Driver Actuator/Driver	6-5 6-9 6-9 6-9	SLLS029 SLYD002 SLYD002 SLYD002
SN75067NE SN75068NE SN75069NE SN75107AD	Actuator/Driver Actuator/Driver Actuator/Driver Line Receiver	6-9 6-9 6-9 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75107AJ SN75107AN SN75107BD SN75107BJ	Line Receiver Line Receiver Line Receiver Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75107BN SN75108AD SN75108AJ SN75108AN	Line Receiver Line Receiver Line Receiver Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75108BD SN75108BJ SN75108BN SN75109AD	Line Receiver Line Receiver Line Receiver Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75109AJ SN75109AN SN75110AD SN75110AJ	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75110AN SN75111D SN75111J SN75111N	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75112D SN75112J SN75112N SN75113D	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75113J SN75113N SN75114FK SN75114J	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75114N SN75115D SN75115J SN75115N	Line Driver Line Receiver Line Receiver Line Receiver	6-2 6-4 6-4 6-4	SLYD002 SLYD002 SLYD002 SLYD002
SN75116D SN75116J SN75116N SN75117D	Line Transceiver Line Transceiver Line Transceiver Line Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75117JG SN75117P SN75118D SN75118J	Line Transceiver Line Transceiver Line Transceiver Line Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75118N SN75119D SN75119JG SN75119P	Line Transceiver Line Transceiver Line Transceiver Line Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75121D SN75121J SN75121N SN75122D	Line Driver Line Driver Line Driver Line Receiver	6-2 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN75122J SN75122N SN75123D SN75123J	Line Receiver Line Receiver Line Driver Line Driver	6-3 6-3 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75123N SN75124D SN75124J SN75124N	Line Driver Line Receiver Line Receiver Line Receiver	6-2 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75125D SN75125J SN75125N SN75127D	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75127J SN75127N SN75128J SN75128N	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75129J SN75129N SN75136D SN75136J	Line Receiver Line Receiver Bus Transceiver Bus Transceiver	6-3 6-3 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75136N SN75138D SN75138J SN75138N	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75140D SN75140JG SN75140P SN75141D	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75141JG SN75141P SN75146D SN75146P	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75150D SN75150JG SN75150P SN75151J	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75151N SN75152D SN75152J SN75152N	Line Driver Line Receiver Line Receiver Line Receiver	6-2 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75153J SN75153N SN75154D SN75154J	Line Driver Line Driver Line Receiver Line Receiver	6-2 6-2 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75154N SN75155D SN75155P SN75157D	Line Receiver Line Driver and Receiver Line Driver and Receiver Line Receiver	6-3 6-5 6-5 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75157JG SN75157P SN75158D SN75158JG	Line Receiver Line Receiver Line Driver Line Driver	6-3 6-3 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75158P SN75159D SN75159J SN75159N	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75160AN SN75160BN SN75161AN SN75161BDW	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN75161BJ SN75161BN SN75162AN SN75162BN	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75163AN SN75163BDW SN75163BJ SN75163BN	Bus Transceiver Bus Transceiver Bus Transceiver Bus Transceiver	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75164BN SN75172J SN75172N SN75173D	Bus Transceiver Line Driver Line Driver Line Receiver	6-5 6-2 6-2 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75173J SN75173N SN75174J SN75174N	Line Receiver Line Receiver Line Driver Line Driver	6-3 6-3 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75175D SN75175J SN75175N SN75176BD	Line Receiver Line Receiver Line Receiver Bus Transceiver	6-3 6-3 6-3 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75176BP SN75177BD SN75177BP SN75178BD	Bus Transceiver Bus Repeater Bus Repeater Bus Repeater	6-5 6-5 6-5 6-5	SLYD002 SLYD002 SLYD002 SLYD002
SN75178BP SN75179BD SN75179BP SN75182D	Bus Repeater Line Driver and Receiver Pair Line Driver and Receiver Pair Line Receiver	6-5 6-5 6-5 6-4	SLYD002 SLYD002 SLYD002 SLYD002
SN75182J SN75182N SN75183D SN75183J	Line Receiver Line Receiver Line Driver Line Driver	6-4 6-4 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75183N SN75188D SN75188J SN75188N	Line Driver Line Driver Line Driver Line Driver	6-2 6-2 6-2 6-2	SLYD002 SLYD002 SLYD002 SLYD002
SN75189AD SN75189AJ SN75189AN SN75189D	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-3 6-3	SLYD002 SLYD002 SLYD002 SLYD002
SN75189J SN75189N SN75207BD SN75207BJ	Line Receiver Line Receiver Line Receiver Line Receiver	6-3 6-3 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75207BN SN75207D SN75207J SN75207N	Line Receiver Line Receiver Line Receiver Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75208BD SN75208BJ SN75208BN SN75208D	Sense Amp or Line Receiver Sense Amp or Line Receiver Sense Amp or Line Receiver Sense Amp or Line Receiver	6-4,6-11 6-4,6-11 6-4,6-11 6-4,6-11	SLYD002 SLYD002 SLYD002 SLYD002
SN75208J SN75208N SN75372D SN75372P	Sense Amp or Line Receiver Sense Amp or Line Receiver MOSFET Driver MOSFET Driver	6-4,6-11 6-4,6-11 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75374D SN75374N SN75407P SN75408P	MOSFET Driver MOSFET Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN75512BDW SN75512BN SN75513BDW SN75513BN	Display Driver Display Driver Display Driver Display Driver	6-7 6-7 6-7 6-7	SLYD002 SLYD002 SLYD002 SLYD002
SN75514N SN75518FN SN75518N SN75551FN	Display Driver Display Driver Display Driver Display Driver	6-7 6-7 6-7 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN75551N SN75552FN SN75552N SN75553FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN75553N SN75554FN SN75554N SN75555FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN75555N SN75556FN SN75556N SN75557FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN75558FN SN75563FN SN75564FN SN75567FN	Display Driver Display Driver Display Driver Display Driver	6-6 6-6 6-6 6-6	SLYD002 SLYD002 SLYD002 SLYD002
SN75568FN SN75581J SN75581N SN75603KC	Display Driver Display Driver Display Driver Motor Driver	6-6 6-8 6-8 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75603KH SN75603KV SN75604KC SN75604KH	Motor Driver Motor Driver Motor Driver Motor Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75604KV SN75605KC SN75605KH SN75605KV	Motor Driver Motor Driver Motor Driver Motor Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75608KV SN75609KV SN76494N SN76496N	Flux-Regulating Actuator Flux-Regulating Actuator Sound Generator Sound Generator	6-10 6-10 7-22 7-22	SLYD002 SLYD002 SLFS013 SLFS013
SN95160BFB SN95160BJ SN95161BFB SN95161BJ	Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver Octal Bus Transceiver	— — — —	SGLS014 SGLS014 SGLS015 SGLS015
SN751506FT SN751508FT SN751516FT SN751518FT	Display Driver Display Driver Display Driver Display Driver	6-8 6-8 6-8 6-8	SLYD002 SLYD001 SLYD002 SLYD002
SN754410NE SN754411NE TACT1010-65JD TACT2150-20JD	Motor Driver Motor Driver 16 × 16 Multiplier/Accumulator Cache Address Comparator 512 × 9	6-10 6-10 3-34 4-61	SLYD002 SLYD002 SCSS002 SCSS003B
TACT2150-30JD TCK102 TCK103 TCK104	Cache Address Comparator 512 × 9 TC102 Evaluation Kit TC103 Evaluation Kit TC104 Evaluation Kit	4-61 8-2 8-2 8-2	SCSS003B SOYD002 SOYD002 SOYD002
TCK106-1 TCM29C13DW TCM29C13J TCM29C14DW	Image Sensor Evaluation Kit PCM CODEC and Filter PCM CODEC and Filter PCM CODEC and Filter	8-2 9-4 9-4 9-4	SOYD002 SCTD001 SCTD001 SCTD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
SN75435NE SN75436NE SN75437ANE SN75438NE	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75440NE SN75446D SN75446P SN75447D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75447P SN75448D SN75448P SN75449D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75449P SN75451BD SN75451BP SN75452BD	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75452BP SN75453BD SN75453BP SN75454BD	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75454BP SN75461D SN75461P SN75462D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-9	SLYD002 SLYD002 SLYD002 SLYD002
SN75462P SN75463D SN75463P SN75465D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-9 6-9 6-9 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75465J SN75465N SN75466D SN75466J	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75466N SN75467D SN75467N SN75468D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75468N SN75469D SN75469N SN75471D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75471P SN75472D SN75472P SN75473D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75473P SN75476D SN75476P SN75477D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75477P SN75478D SN75478P SN75479D	Actuator/Driver Actuator/Driver Actuator/Driver Actuator/Driver	6-10 6-10 6-10 6-10	SLYD002 SLYD002 SLYD002 SLYD002
SN75479P SN75494N SN75500EFN SN75500EN	Actuator/Driver Display Driver Display Driver Display Driver	6-10 6-7 6-8 6-8	SLYD002 SLYD002 SLYD002 SLYD002
SN75501EFN SN75501EN SN75508FN SN75509FN	Display Driver Display Driver Display Driver Display Driver	6-8 6-8 6-8 6-8	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TCM29C14J TCM29C16J TCM29C16N TCM29C17J	PCM CODEC and Filter PCM CODEC and Filter PCM CODEC and Filter PCM CODEC and Filter	9-4 9-4 9-4 9-4	SCTD001 SCTD001 SCTD001 SCTD001
TCM29C17N TCM29C18 TCM29C19 TCM1501BP	PCM CODEC and Filter Digital Signal Processor Digital Signal Processor Telephone Ringer Driver	9-4 7-15,9-4 7-15,9-4 9-5	SCTD001 SCTS021 SCTS021 SCTS020
TCM1506BP TCM1512B TCM1520AP TCM1531P	Telephone Ringer Driver Ring Detector Ring Detector Tone Ringer Driver	9-5 9-5 9-5 9-5	SCTD001 SCTD001 SCTD001 SCTS020
TCM1532P TCM1536P TCM1539P TCM2202J	Tone Ringer Driver Tone Ringer Driver Tone Ringer Driver Encoder/Decoder AMI/HDB3	9-5 9-5 9-5 9-2	SCTS020 SCTS020 SCTD001 SCTD001
TCM2203J TCM2222J TCM2909 TCM2910AJ	Equipment Line Interface Encoder/Decoder, AMI/HDB3 PCM CODEC PCM CODEC	9-2 9-2 9-3 9-3	SCTD001 SCTD001 SCTD001 SCTD001
TCM2910AN TCM2912BJ TCM2912CJ TCM2913J	PCM CODEC PCM Line Filter PCM Line Filter PCM CODEC and Filter	9-3 9-3 9-3 9-3	SCTD001 SCTD001 SCTD001 SCTD001
TCM2913J-3 TCM2914J TCM2916J TCM2917J	PCM CODEC and Filter PCM CODEC and Filter PCM CODEC and Filter PCM CODEC and Filter	9-3 9-3 9-3 9-3	SCTD001 SCTD001 SCTD001 SCTD001
TCM3105JE TCM3105JL TCM4204AJ TCM4204J	FSK Modem FSK Modem Subscriber-Line Control Circuit Subscriber-Line Control Circuit	9-4 9-4 9-5 9-5	SCTD001 SCTD001 SCTD001 SCTD001
TCM4205AJ TCM4205J TCM4207AJ TCM4207J	Subscriber-Line Control Circuit Subscriber-Line Control Circuit Subscriber-Line Control Circuit Subscriber-Line Control Circuit	9-5 9-5 9-5 9-5	SCTD001 SCTD001 SCTD001 SCTD001
TCM4208 TCM5087N TCM5089N TCM78808FN	Subscriber-Line Interface Circuit Tone Encoder Tone Encoder Asynchronous Receiver/Transmitter	9-5 9-5 9-5 9-4	SCTD001 SCTD001 SCTD001 SCTS022
TCM78808HA TCM78808HB TC102 TC102-1	Asynchronous Receiver/Transmitter Asynchronous Receiver/Transmitter Image Sensor, Line Array Image Sensor, Line Array	9-4 9-4 8-2 8-2	SCTS022 SCTS022 SOYD002 SOYD002
TC103 TC103-1 TC104 TC104-1	Image Sensor, Line Array Image Sensor, Line Array Image Sensor, Line Array Image Sensor, Line Array	8-2 8-2 8-2 8-2	SOYD002 SOYD002 SOYD002 SOYD002
TC106-1 TC210 TC211 TC240	Image Sensor, Line Array Area Image Sensor Image Sensor, Area array Image Sensor, Area array	8-2 8-2 8-2 8-2	SOYD002 SOYD002 SOYD002 SOYD002
TC241 THCT1010-100JD THCT1010-140JDE THCT2000N	Image Sensor, Area array 16 × 16 Multiplier/Accumulator 16 × 16 Multiplier/Accumulator Direction Discriminator	8-2 3-34 3-34 —	SOYD002 SCSS001 SCSS001 SCLS044
THCT4502BFN THCT4502BJD THCT4502BN TIBPALR19L8CFN	256K Dynamic RAM Controller 256K Dynamic RAM Controller 256K Dynamic RAM Controller High Performance PAL Circuit	3-31 3-31 3-31 3-37	SCCS005B SCCS005B SCCS005B SDZD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TIBPALR19L8CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R4CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R4CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R6CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R6CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R8CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALR19R8CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19L8CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19L8CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19R4CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19R6CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19R6CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19R8CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPALT19R8CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL16L8-10CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-10CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-12CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-12CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-15CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-15FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-15J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-15W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL16L8-20J	High Performance PAL Circuit	—	SDZD001B
TIBPAL16L8-20W	High Performance PAL Circuit	—	SDZD001B
TIBPAL16L8-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-25CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-30FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-30J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16L8-30W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-10CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-10CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-12CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-12CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-15CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-15FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-15J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-15W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R4-20J	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R4-20W	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R4-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-25CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-30FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-30J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R4-30W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-10CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-10CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-12CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-12CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-15CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-15FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-15J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-15W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R6-20J	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R6-20W	High Performance PAL Circuit	—	SDZD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TIBPAL16R6-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-25CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-30FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-30J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R6-30W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-10CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-10CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-12CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-12CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-15CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-15FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-15J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-15W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R8-20J	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R8-20W	High Performance PAL Circuit	—	SDZD001B
TIBPAL16R8-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-25CN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-30FK	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-30J	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL16R8-30W	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L8-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L8-15CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L8-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20L8-20JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20L8-25CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L10-20CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L10-20CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20L10-25FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20L10-25JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20L10-30CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R4-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R4-15CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R4-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R4-20JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R4-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R4-25CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R6-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R6-15CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R6-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R6-20JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R6-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R6-25CNT	High Performance PAL Circuit	3-36	SDPS020
TIBPAL20R8-15CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R8-15CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R8-20FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R8-20JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20R8-25CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20R8-25CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X4-20CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X4-20CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X4-25FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20X4-25JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20X4-30CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X4-30CNT	High Performance PAL Circuit	3-36	SDZD001A
TIBPAL20X8-20CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X8-20CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X8-25FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20X8-25JT	High Performance PAL Circuit	—	SDZD001B

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TIBPAL20X8-30CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X8-30CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X10-20CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X10-20CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X10-25FK	High Performance PAL Circuit	—	SDZD001B
TIBPAL20X10-25JT	High Performance PAL Circuit	—	SDZD001B
TIBPAL20X10-30CFN	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL20X10-30CNT	High Performance PAL Circuit	3-36	SDZD001B
TIBPAL22VP10-20CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22VP10-20CNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10ACFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10ACNT	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10AFK	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10AJT	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10AW	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10CFN	High Performance PAL Circuit	3-37	SDZD001B
TIBPAL22V10CNT	High Performance PAL Circuit	3-37	SDZD001B
TIB82S105BCFN	High Performance PAL Circuit	3-37	SDZD001B
TIB82S105BCN	High Performance PAL Circuit	3-37	SDZD001B
TIB82S167BCFN	High Performance PAL Circuit	3-37	SDZD001B
TIB82S167BCNT	High Performance PAL Circuit	3-37	SDZD001B
TICPAL16L8-55JL	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16L8-55N	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R4-55JL	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R4-55N	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R6-55JL	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R6-55N	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R8-55JL	High Performance CMOS PAL Circuit	3-37	TBA
TICPAL16R8-55N	High Performance CMOS PAL Circuit	3-37	TBA
TIEPAL10H16P8-6CJT	High Performance ECL PAL Circuit	—	SDPS018
TIFPLA839CFN	Field Programmable Logic Array	3-37	SDZD001B
TIFPLA839CNT	Field Programmable Logic Array	3-37	SDZD001B
TIFPLA840CFN	Field Programmable Logic Array	3-37	SDZD001B
TIFPLA840CNT	Field Programmable Logic Array	3-37	SDZD001B
TIL23	Infrared-Emitting Diode	8-7	SOYD002
TIL24	Infrared-Emitting Diode	8-7	SOYD002
TIL24HR2	Infrared-Emitting Diode	8-7	SOYD002
TIL25	Infrared-Emitting Diode	8-7	SOYD002
TIL102	Optocoupler	8-4	SOYD002
TIL103	Optocoupler	8-4	SOYD002
TIL111	Optocoupler	8-4	SOYD002
TIL112	Optocoupler	8-4	SOYD002
TIL113	Optocoupler	8-4	SOYD002
TIL114	Optocoupler	8-4	SOYD002
TIL115	Optocoupler	8-4	SOYD002
TIL116	Optocoupler	8-4	SOYD002
TIL117	Optocoupler	8-4	SOYD002
TIL118	Optocoupler	8-4	SOYD002
TIL119	Optocoupler	8-4	SOYD002
TIL119A	Optocoupler	8-4	SOYD002
TIL120	Optocoupler	8-4	SOYD002
TIL121	Optocoupler	8-4	SOYD002
TIL124	Optocoupler	8-4	SOYD002
TIL125	Optocoupler	8-4	SOYD002
TIL126	Optocoupler	8-4	SOYD002
TIL127	Optocoupler	8-5	SOYD002
TIL128	Optocoupler	8-5	SOYD002
TIL128A	Optocoupler	8-5	SOYD002
TIL153	Optocoupler	8-5	SOYD002
TIL154	Optocoupler	8-5	SOYD002



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TIL155	Optocoupler	8-5	SOYD002
TIL156	Optocoupler	8-5	SOYD002
TIL157	Optocoupler	8-5	SOYD002
TIL157A	Optocoupler	8-5	SOYD002
TIL181	Optocoupler	8-5	SOYD002
TIL186	Optocoupler	8-5	SOYD002
TIL187	Optocoupler	8-5	SOYD002
TIL188	Optocoupler	8-5	SOYD002
TIL189	Optocoupler	8-5	SOYD002
TIL190	Optocoupler	8-5	SOYD002
TIL302	Numeric Display, LED	8-7	SOYD002
TIL302A	Numeric Display, LED	8-7	SOYD002
TIL303	Numeric Display, LED	8-7	SOYD002
TIL303A	Numeric Display, LED	8-7	SOYD002
TIL304	Numeric Display, LED	8-7	SOYD002
TIL304A	Numeric Display, LED	8-7	SOYD002
TIL305	Alphanumeric Display, LED	8-7	SOYD002
TIL306	Numeric Display, LED	8-7	SOYD002
TIL306A	Numeric Display, LED	8-7	SOYD002
TIL307	Numeric Display, LED	8-7	SOYD002
TIL307A	Numeric Display, LED	8-7	SOYD002
TIL308	Numeric Display, LED	8-7	SOYD002
TIL308A	Numeric Display, LED	8-7	SOYD002
TIL309	Numeric Display, LED	8-7	SOYD002
TIL309A	Numeric Display, LED	8-7	SOYD002
TIL311	Hexadecimal Display, LED	8-7	SOYD002
TIL311A	Hexadecimal Display, LED	8-7	SOYD002
TIL601	Phototransistor	8-7	SOYD002
TIL602	Phototransistor	8-7	SOYD002
TIL603	Phototransistor	8-7	SOYD002
TIL604	Phototransistor	8-7	SOYD002
TIL604HR2	Phototransistor	8-7	SOYD002
TLC04D	Switched-Capacitance Filter	7-15	SLYD002
TLC04N	Switched-Capacitance Filter	7-15	SLYD002
TLC04P	Switched-Capacitance Filter	7-15	SLYD002
TLC10CFN	Switched-Capacitance Filter	7-15	SLYD002
TLC10CN	Switched-Capacitance Filter	7-15	SLYD002
TLC14D	Switched-Capacitance Filter	7-15	SLYD002
TLC14N	Switched-Capacitance Filter	7-15	SLYD002
TLC20CN	Switched-Capacitance Filter	7-15	SLYD002
TLC25L2ACD	Operational Amplifier	7-7	SLYD001
TLC25L2ACP	Operational Amplifier	7-7	SLYD001
TLC25L2BCD	Operational Amplifier	7-7	SLYD001
TLC25L2BCP	Operational Amplifier	7-7	SLYD001
TLC25L2CD	Operational Amplifier	7-7	SLYD001
TLC25L2CP	Operational Amplifier	7-7	SLYD001
TLC25L4ACD	Operational Amplifier	7-9	SLYD001
TLC25L4ACN	Operational Amplifier	7-9	SLYD001
TLC25L4BCD	Operational Amplifier	7-9	SLYD001
TLC25L4BCN	Operational Amplifier	7-9	SLYD001
TLC25L4CD	Operational Amplifier	7-9	SLYD001
TLC25L4CN	Operational Amplifier	7-9	SLYD001
TLC25M2ACD	Operational Amplifier	7-7	SLYD001
TLC25M2ACP	Operational Amplifier	7-7	SLYD001
TLC25M2BCD	Operational Amplifier	7-7	SLYD001
TLC25M2BCP	Operational Amplifier	7-7	SLYD001
TLC25M2CD	Operational Amplifier	7-7	SLYD001
TLC25M2CP	Operational Amplifier	7-7	SLYD001
TLC25M4ACD	Operational Amplifier	7-9	SLYD001
TLC25M4ACN	Operational Amplifier	7-9	SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TLC25M4BCD TLC25M4BCN TLC25M4CD TLC25M4CN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-10 7-10 7-10 7-10	SLYD001 SLYD001 SLYD001 SLYD001
TLC27L2ACD TLC27L2ACP TLC27L2AID TLC27L2AIP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-7 7-7 7-5 7-5	SLO3006 SLO3006 SLO3006 SLO3006
TLC27L2AMFK TLC27L2AMJG TLC27L2BCD TLC27L2BCP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-7 7-7	SLO3006* SLO3006* SLO3006 SLO3006
TLC27L2BID TLC27L2BIP TLC27L2CD TLC27L2CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-7 7-7	SLO3006 SLO3006 SLO3006 SLO3006
TLC27L2ID TLC27L2IP TLC27L2MFK TLC27L2MJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-5 7-5	SLO3006 SLO3006 SLO3006* SLO3006*
TLC27L4ACD TLC27L4ACN TLC27L4AID TLC27L4AIN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-10 7-10 7-8 7-8	SLO3002 SLO3002 SLO3002 SLO3002
TLC27L4AMFK TLC27L4AMJ TLC27L4BCD TLC27L4BCN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-8 7-10 7-10	SLO3002* SLO3002* SLO3002 SLO3002
TLC27L4BID TLC27L4BIN TLC27L4CD TLC27L4CN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-8 7-10 7-10	SLO3002 SLO3002 SLO3002 SLO3002
TLC27L4ID TLC27L4IN TLC27L4MFK TLC27L4MJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-8 7-8 7-8	SLO3002 SLO3002 SLO3002* SLO3002*
TLC27L7CD TLC27L7CP TLC27L7ID TLC27L7IP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-7 7-7 7-5 7-5	SLO3006 SLO3006 SLO3006 SLO3006
TLC27L7MFK TLC27L7MJG TLC27L9CD TLC27L9CJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-10 7-10	SLO3006* SLO3006* SLO3002 SLO3002
TLC27L9ID TLC27L9IN TLC27M2ACD TLC27M2ACP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-8 7-7 7-7	SLO3002 SLO3002 SLO3005 SLO3005
TLC27M2AID TLC27M2AIP TLC27M2AMFK TLC27M2AMJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-5 7-5	SLO3005 SLO3005 SLO3005* SLO3005*
TLC27M2BCD TLC27M2BCP TLC27M2BID TLC27M2BIP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-7 7-7 7-5 7-5	SLO3005 SLO3005 SLO3005 SLO3005
TLC27M2CD TLC27M2CP TLC27M2ID TLC27M2IP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-7 7-7 7-5 7-5	SLO3005 SLO3005 SLO3005 SLO3005

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TLC27M2MFK TLC27M2MJG TLC27M4ACD TLC27M4ACN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-10 7-10	SLO3005* SLO3005* SLO3003 SLO3003
TLC27M4AID TLC27M4AIN TLC27M4AMFK TLC27M4AMJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-8 7-10 7-10	SLO3003 SLO3003 SLO3003* SLO3003*
TLC27M4BCD TLC27M4BCN TLC27M4BID TLC27M4BIN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-10 7-10 7-8 7-8	SLO3003 SLO3003 SLO3003 SLO3003
TLC27M4CD TLC27M4CN TLC27M4ID TLC27M4IN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-10 7-10 7-8 7-8	SLO3003 SLO3003 SLO3003 SLO3003
TLC27M4MFK TLC27M4MJ TLC27M7CD TLC27M7CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-10 7-10 7-7 7-7	SLO3003* SLO3003* SLO3005 SLO3005
TLC27M7ID TLC27M7IP TLC27M7MFK TLC27M7MJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-7 7-7	SLO3005 SLO3005 SLO3005* SLO3005*
TLC27M9D TLC27M9J TLC27M9N TLC251ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8,7-10 7-8,7-10 7-8,7-10 7-5	SLO3003 SLO3003 SLO3003 SLYD001
TLC251ACP TLC251BCD TLC251BCP TLC251CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-5 7-5 7-5	SLYD001 SLYD001 SLYD001 SLYD001
TLC251CP TLC252ACD TLC252ACP TLC252BCD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-7 7-7 7-7	SLYD001 SLYD001 SLYD001 SLYD001
TLC252BCP TLC252CD TLC252CP TLC254ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-7 7-7 7-7 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TLC254ACN TLC254BCD TLC254BCN TLC254CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TLC254CN TLC271ACD TLC271ACP TLC271AID	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-5 7-5 7-3	SLYD001 SLO3007 SLO3007 SLO3007
TLC271AIP TLC271AMFK TLC271AMJG TLC271BCD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-3 7-5 7-5 7-5	SLO3007 SLO3007 SLO3007 SLO3007
TLC271BCP TLC271BID TLC271BIP TLC271CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-3 7-3 7-5	SLO3007 SLO3007 SLO3007 SLO3007
TLC271CP TLC271ID TLC271IP TLC271MFK	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-5 7-3 7-3 7-5	SLO3007 SLO3007 SLO3007 SLO3007

\*Use TI Reference Document for Electrical Parameters.

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TLC271MJG	Operational Amplifier	7-5	SLO3007
TLC272ACD	Operational Amplifier	7-7	SLO3004
TLC272ACP	Operational Amplifier	7-7	SLO3004
TLC272AID	Operational Amplifier	7-5	SLO3004
TLC272AIP	Operational Amplifier	7-5	SLO3004
TLC272AMFK	Operational Amplifier	7-7	SLO3004
TLC272AMJ	Operational Amplifier	7-7	SLO3004
TLC272AMJG	Operational Amplifier	7-7	SLO3004
TLC272BCD	Operational Amplifier	7-7	SLO3004
TLC272BCP	Operational Amplifier	7-7	SLO3004
TLC272BID	Operational Amplifier	7-5	SLO3004
TLC272BIP	Operational Amplifier	7-5	SLO3004
TLC272CD	Operational Amplifier	7-7	SLO3004
TLC272CP	Operational Amplifier	7-7	SLO3004
TLC272ID	Operational Amplifier	7-5	SLO3004
TLC272IP	Operational Amplifier	7-5	SLO3004
TLC272MFK	Operational Amplifier	7-7	SLO3004
TLC272MJ	Operational Amplifier	7-7	SLO3004
TLC272MJG	Operational Amplifier	7-7	SLO3004
TLC274ACD	Operational Amplifier	7-9	SLO3001
TLC274ACN	Operational Amplifier	7-9	SLO3001
TLC274AID	Operational Amplifier	7-8	SLO3001
TLC274AIN	Operational Amplifier	7-8	SLO3001
TLC274AMFK	Operational Amplifier	7-9	SLO3001
TLC274AMJ	Operational Amplifier	7-9	SLO3001
TLC274BCD	Operational Amplifier	7-9	SLO3001
TLC274BCN	Operational Amplifier	7-9	SLO3001
TLC274BID	Operational Amplifier	7-8	SLO3001
TLC274BIN	Operational Amplifier	7-8	SLO3001
TLC274CD	Operational Amplifier	7-9	SLO3001
TLC274CN	Operational Amplifier	7-9	SLO3001
TLC274ID	Operational Amplifier	7-8	SLO3001
TLC274IN	Operational Amplifier	7-8	SLO3001
TLC274MFK	Operational Amplifier	7-9	SLO3001
TLC274MJ	Operational Amplifier	7-9	SLO3001
TLC277CD	Operational Amplifier	7-7	SLO3004
TLC277CP	Operational Amplifier	7-7	SLO3004
TLC277ID	Operational Amplifier	7-5	SLO3004
TLC277IP	Operational Amplifier	7-5	SLO3004
TLC277MFK	Operational Amplifier	7-7	SLO3004
TLC277MJG	Operational Amplifier	7-7	SLO3004
TLC279CD	Operational Amplifier	7-9	SLO3001
TLC279CJ	Operational Amplifier	7-9	SLO3001
TLC279CN	Operational Amplifier	7-9	SLO3001
TLC279ID	Operational Amplifier	7-8	SLO3001
TLC279IJ	Operational Amplifier	7-8	SLO3001
TLC279IN	Operational Amplifier	7-8	SLO3001
TLC339CD	Voltage Comparator	7-12	SLNS018
TLC339CN	Voltage Comparator	7-12	SLNS018
TLC339ID	Voltage Comparator	7-11	SLNS018
TLC339IN	Voltage Comparator	7-11	SLNS018
TLC352CD	Voltage Comparator	7-12	SLOS007
TLC352CP	Voltage Comparator	7-12	SLOS007
TLC354CD	Voltage Comparator	7-12	SLOS008
TLC354CN	Voltage Comparator	7-12	SLOS008
TLC372CD	Voltage Comparator	7-12	SLNS002A
TLC372CP	Voltage Comparator	7-12	SLNS002A
TLC372ID	Voltage Comparator	7-12	SLNS002A
TLC372IP	Voltage Comparator	7-12	SLNS002A
TLC372MFK	Voltage Comparator	7-12	SLNS002A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TLC372MJG TLC374CD TLC374CN TLC374ID	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-12 7-11,7-12 7-11,7-12 7-11,7-12	SLNS002A SLNS003A SLNS003A SLNS003A
TLC374IN TLC374MFK TLC374MJ TLC393CD	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-11,7-12 7-11,7-12 7-11,7-12 7-12	SLNS003A SLNS003A SLNS003A SLNS017
TLC393CP TLC393ID TLC393IP TLC532AIN	Voltage Comparator Voltage Comparator Voltage Comparator A/D Converter Peripheral	7-12 7-11 7-11 7-14	SLNS017 SLNS017 SLNS017 SLYD002
TLC532AMN TLC533AIN TLC533AMN TLC540IFN	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
TLC540IN TLC541FN TLC541IN TLC545IFN	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
TLC545IN TLC546FN TLC546IN TLC548CD	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral	7-14 7-14 7-14 7-14	SLYD002 SLYD002 SLYD002 SLYD002
TLC548IP TLC549CD TLC549IP TLC551CD	A/D Converter Peripheral A/D Converter Peripheral A/D Converter Peripheral LinCMOS Timers	7-14 7-14 7-14 7-20	SLYD002 SLYD002 SLYD002 SLYD001
TLC551CP TLC552CD TLC552CN TLC555CD	LinCMOS Timers LinCMOS Timers LinCMOS Timers LinCMOS Timers	7-20 7-20 7-20 7-20	SLYD001 SLYD001 SLYD001 SLYD001
TLC555CP TLC555ID TLC555IP TLC555MFK	LinCMOS Timers LinCMOS Timers LinCMOS Timers Dual Timer	7-20 7-20 7-20 7-20	SLYD001 SLYD001 SLYD001 SLNS001A
TLC555MJG TLC556CD TLC556CN TLC556ID	Dual Timer LinCMOS Timers LinCMOS Timers LinCMOS Timers	7-20 7-20 7-20 7-20	SLNS001A SLNS008 SLNS008 SLNS008
TLC556IN TLC556MFK TLC556MJ TLC0820ACN	LinCMOS Timers Quad Timer Quad Timer A/D Converter	7-20 7-20 7-20 7-14,7-15	SLNS008 SLNS008 SLNS008 SLYD002
TLC0820AFN TLC0820AIN TLC0820AMN TLC0820BCFN	A/D Converter A/D Converter A/D Converter A/D Converter	7-14,7-15 7-14,7-15 7-14,7-15 7-14,7-15	SLYD002 SLYD002 SLYD002 SLYD002
TLC0820BCN TLC0820BIFN TLC0820BIN TLC1541FN	A/D Converter A/D Converter A/D Converter A/D Converter Peripheral	7-14,7-15 7-14,7-15 7-14,7-15 7-14	SLYD002 SLYD002 SLYD002 SLYD002
TLC1541IN TLC3702CD TLC3702CP TLC3702ID	A/D Converter Peripheral Voltage Comparator Voltage Comparator Voltage Comparator	7-14 7-12 7-12 7-11	SLYD002 SLNS015 SLNS015 SLNS015
TLC3702IP TLC3704CD TLC3704CN TLC3704ID	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-11 7-12 7-12 7-11	SLNS015 SLNS016 SLNS016 SLNS016

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TLC3704IN TLC4016IN TLC4066ID TLC4066IN	Voltage Comparator Analog Switch Analog Switch Analog Switch	7-11 7-15 7-15 7-15	SLNS016 SLYD002 SLYD002 SLYD002
TLC7524CD TLC7524CN TLC7524ID TLC7524IN	D/A Converter D/A Converter D/A Converter D/A Converter	7-14,7-15 7-14,7-15 7-14,7-15 7-14,7-15	SLYD002 SLYD002 SLYD002 SLYD002
TLC7528CN TLC7528IN TLC32040MN TLC32040IN	D/A Converter D/A Converter Analog Interface Circuit Analog Interface Circuit	7-14 7-14 7-15 7-15	SLYD002 SLYD002 SLYD002 SLYD002
TLP298KV TL010CP TL010IP TL011CLP	Motor Driver Current Mirror Current Mirror Current Mirror	— 7-21 7-21 7-21	SLRS012 SLYD001 SLYD001 SLYD001
TL011ILP TL012CLP TL012ILP TL014CLP	Current Mirror Current Mirror Current Mirror Current Mirror	7-21 7-21 7-21 7-21	SLYD001 SLYD001 SLYD001 SLYD001
TL014ILP TL021CLP TL021ILP TL022CJG	Current Mirror Current Mirror Current Mirror Operational Amplifier	7-21 7-21 7-21 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL022CP TL022MJG TL026CD TL026CP	Operational Amplifier Operational Amplifier Video Amplifier Video Amplifier	7-6 7-6 7-10 7-10	SLYD001 SLYD001 SLFS007 SLFS007
TL027CD TL027CN TL040CD TL040CN	Video Amplifier Video Amplifier Video Amplifier Video Amplifier	7-10 7-10 7-10 7-10	SLFS008 SLFS008 SLFS012 SLFS012
TL041CDW TL041CNT TL044CD TL044CN	Read/Write Control, Streaming Tape Read/Write Control, Streaming Tape Operational Amplifier Operational Amplifier	7-10 7-10 7-9 7-9	SLFS015 SLFS015 SLYD001 SLYD001
TL044MJG TL060ACP TL060BCP TL060BD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-2 7-2 7-2	SLYD001 SLYD001 SLYD001 SLYD001
TL060CD TL060CP TL060IP TL061ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-2 7-2 7-2 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL061ACJG TL061ACP TL061BCJG TL061BCP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL061CD TL061CJG TL061CP TL061IJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-3	SLYD001 SLYD001 SLYD001 SLYD001
TL061IP TL061MFK TL061MJG TL062ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-3 7-3 7-3 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL062ACJG TL062ACP TL062BCD TL062BCJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TL062BCP TL062CD TL062CJG TL062CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL062ID TL062IJG TL062IP TL062MFK	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL062MJG TL064ACD TL064ACJ TL064ACN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TL064BCD TL064BCJ TL064BCN TL064CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TL064CJ TL064CN TL064ID TL064IJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-8 7-8	SLYD001 SLYD001 SLYD001 SLYD001
TL064IN TL064MFK TL064MJ TL066ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-9 7-9 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL066ACJG TL066ACP TL066BCD TL066BCJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL066BCP TL066CJG TL066CP TL066ID	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-3	SLYD001 SLYD001 SLYD001 SLYD001
TL066IJG TL066IP TL070ACP TL070CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-3 7-3 7-2 7-2	SLYD001 SLYD001 SLYD001 SLYD001
TL070IP TL071ACD TL071ACJG TL071ACP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-2 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL071BCD TL071BCJG TL071BCP TL071CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL071CJG TL071CP TL071ID TL071IJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-3 7-3	SLYD001 SLYD001 SLYD001 SLYD001
TL071IP TL071MFK TL071MJG TL072ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-3 7-4 7-4 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL072ACJG TL072ACP TL072BCD TL072BCJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL072BCP TL072CD TL072CJG TL072CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TL072ID TL072JG TL072IP TL072MFK	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL072MJG TL074ACD TL074ACJ TL074ACN	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TL074BCD TL074BCJ TL074BCN TL074CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TL074CJ TL074CN TL074ID TL074IJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-9 7-8 7-8	SLYD001 SLYD001 SLYD001 SLYD001
TL074IN TL074MFK TL074MJ TL075CJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-8 7-9 7-9 7-9	SLYD001 SLYD001 SLYD001 SLYD001
TL075CN TL080ACJG TL080ACP TL080CJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-9 7-2 7-2 7-2	SLYD001 SLYD001 SLYD001 SLYD001
TL080CP TL080JG TL080IP TL081ACD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-2 7-2 7-2 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL081ACJG TL081ACP TL081BCD TL081BCJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL081BCP TL081CD TL081CJG TL081CP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-4 7-4 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL081ID TL081IJG TL081IP TL081MFK	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-3 7-3 7-3 7-4	SLYD001 SLYD001 SLYD001 SLYD001
TL081MJG TL082ACD TL082ACJG TL082ACP	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-4 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL082BCD TL082BCJG TL082BCP TL082CD	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL082CJG TL082CP TL082ID TL082IJG	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL082IP TL082MFK TL082MJG TL083ACJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001
TL083ACN TL083CJ TL083CN TL083IJ	Operational Amplifier Operational Amplifier Operational Amplifier Operational Amplifier	7-6 7-6 7-6 7-6	SLYD001 SLYD001 SLYD001 SLYD001



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TL083IN	Operational Amplifier	7-6	SLYD001
TL084ACD	Operational Amplifier	7-9	SLYD001
TL084ACJ	Operational Amplifier	7-9	SLYD001
TL084ACN	Operational Amplifier	7-9	SLYD001
TL084BCD	Operational Amplifier	7-9	SLYD001
TL084BCJ	Operational Amplifier	7-9	SLYD001
TL084BCN	Operational Amplifier	7-9	SLYD001
TL084CD	Operational Amplifier	7-9	SLYD001
TL084CJ	Operational Amplifier	7-9	SLYD001
TL084CN	Operational Amplifier	7-9	SLYD001
TL084ID	Operational Amplifier	7-8	SLYD001
TL084IJ	Operational Amplifier	7-8	SLYD001
TL084IN	Operational Amplifier	7-8	SLYD001
TL084MFK	Operational Amplifier	7-9	SLYD001
TL084MJ	Operational Amplifier	7-9	SLYD001
TL085CN	Operational Amplifier	7-9	SLYD001
TL087CD	Operational Amplifier	7-4,7-6	SLYD001
TL087CJG	Operational Amplifier	7-4,7-6	SLYD001
TL087CP	Operational Amplifier	7-4,7-6	SLYD001
TL087ID	Operational Amplifier	7-3,7-6	SLYD001
TL087IJG	Operational Amplifier	7-3,7-6	SLYD001
TL087IP	Operational Amplifier	7-3,7-6	SLYD001
TL088CD	Operational Amplifier	7-4,7-6	SLYD001
TL088CJG	Operational Amplifier	7-4,7-6	SLYD001
TL088CP	Operational Amplifier	7-4,7-6	SLYD001
TL088ID	Operational Amplifier	7-3,7-6	SLYD001
TL088IJG	Operational Amplifier	7-3,7-6	SLYD001
TL088IP	Operational Amplifier	7-3,7-6	SLYD001
TL136CJ	Operational Amplifier	7-9	SLYD001
TL136CN	Operational Amplifier	7-9	SLYD001
TL170CLP	Hall-Effect Device	7-21	SLYD001
TL172CLP	Hall-Effect Device	7-21	SLYD001
TL173CLP	Hall-Effect Device	7-21	SLYD001
TL182CN	Analog Switch	7-15	SLYD002
TL182IN	Analog Switch	7-15	SLYD002
TL185CN	Analog Switch	7-15	SLYD002
TL185IN	Analog Switch	7-15	SLYD002
TL188CN	Analog Switch	7-15	SLYD002
TL188IN	Analog Switch	7-15	SLYD002
TL191CN	Analog Switch	7-15	SLYD002
TL191IN	Analog Switch	7-15	SLYD002
TL287CJG	Operational Amplifier	7-6	SLYD001
TL287CP	Operational Amplifier	7-6	SLYD001
TL287IJG	Operational Amplifier	7-6	SLYD001
TL287IP	Operational Amplifier	7-6	SLYD001
TL288CD	Operational Amplifier	7-6	SLYD001
TL288CJG	Operational Amplifier	7-6	SLYD001
TL288CP	Operational Amplifier	7-6	SLYD001
TL288ID	Operational Amplifier	7-6	SLYD001
TL288IP	Operational Amplifier	7-6	SLYD001
TL317CD	Voltage Regulator	7-16	SLVS004
TL317LP	Voltage Regulator	7-16	SLVS004
TL321CJG	Operational Amplifier	7-4	SLYD001
TL321CP	Operational Amplifier	7-4	SLYD001
TL321ID	Operational Amplifier	7-4	SLYD001
TL321IP	Operational Amplifier	7-4	SLYD001
TL322CD	Operational Amplifier	7-7	SLYD001
TL322CP	Operational Amplifier	7-7	SLYD001
TL322ID	Operational Amplifier	7-5	SLYD001
TL322IP	Operational Amplifier	7-5	SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TL331CP TL331IP TL376CD TL376CNE	Voltage Comparator Voltage Comparator Motor Driver Motor Driver	7-12 7-3,7-11 6-10 6-10	SLYD001 SLYD001 SLYD002 SLYD002
TL430CD TL430CLP TL431CD TL431CLP	Voltage Regulator Voltage Regulator Voltage Regulator Voltage Regulator	7-16 7-16 7-16 7-16	SLYD001 SLYD001 SLVS005 SLYD001
TL431CP TL431ILP TL431IP TL431MJG	Voltage Regulator Voltage Regulator Voltage Regulator Voltage Regulator	7-16 7-16 7-16 7-16	SLYD001 SLYD001 SLYD001 SLYD001
TL441AMJ TL441CJ TL441CN TL493CN	Logarithmic Amplifier Logarithmic Amplifier Logarithmic Amplifier PWM Controller	— 7-10 7-10 7-19	SLAS010 SLAS010 SLAS010 SLYD001
TL494CD TL494CJ TL494CN TL494IJ	PWM Controller PWM Controller PWM Controller PWM Controller	7-19 7-19 7-19 7-19	SLYD001 SLYD001 SLYD001 SLYD001
TL494IN TL494MJ TL495CN TL496CP	PWM Controller PWM Controller PWM Controller Power Supply Controller, 9 V	7-19 7-19 7-19 7-19	SLYD001 SLYD001 SLYD001 SLVS012
TL497ACD TL497ACJ TL497ACN TL497AIJ	Switching Voltage Regulator Switching Voltage Regulator Switching Voltage Regulator Switching Voltage Regulator	7-19 7-19 7-19 7-19	SLVS009 SLVS009 SLVS009 SLVS009
TL497AIN TL500CJ TL501CJ TL502CN	Switching Voltage Regulator A/D Converter Circuit A/D Converter Circuit A/D Converter Circuit	7-19 7-13 7-13 7-13	SLVS009 SLYD002 SLYD002 SLYD002
TL503CN TL505CN TL506J TL506N	A/D Converter Circuit A/D Converter Operational Amplifier Operational Amplifier	7-13 7-13 7-12 7-12	SLYD002 SLYD002 SLYD001 SLYD001
TL507CP TL507IP TL510CJG TL510CP	A/D Converter A/D Converter Voltage Comparator Voltage Comparator	7-13 7-13 7-12 7-12	SLYD002 SLYD002 SLYD001 SLYD001
TL514CN TL514MFK TL514MJ TL592AD	Voltage Comparator Voltage Comparator Voltage Comparator Video Amplifier	7-12 7-12 7-12 7-10	SLYD001 SLYD001 SLYD001 SLOS015
TL592AP TL592BN TL592BP TL592B-8D	Video Amplifier Video Amplifier Video Amplifier Video Amplifier	7-10 7-10 7-10 7-10	SLOS015 SLFS001 SLFS001 SLFS001
TL592B-14D TL592D TL592P TL594CJ	Video Amplifier Video Amplifier Video Amplifier PWM Controller	7-10 7-10 7-10 7-19	SLFS001 SLFS001 SLFS001 SLYD001
TL594CN TL594IJ TL594IN TL595CN	PWM Controller PWM Controller PWM Controller PWM Controller	7-19 7-19 7-19 7-19	SLYD001 SLYD001 SLYD001 SLYD001
TL601CP TL601IP TL604CP TL604IP	Analog Switch Analog Switch Analog Switch Analog Switch	7-15 7-15 7-15 7-15	SLYD002 SLYD002 SLYD002 SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TL607CP TL607IP TL610CP TL610IP	Analog Switch Analog Switch Analog Switch Analog Switch	7-15 7-15 7-15 7-15	SLYD002 SLYD002 SLYD002 SLYD002
TL710CJ TL710CJG TL710CN TL710CP	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-12 7-12 7-12 7-12	SLYD001 SLYD001 SLYD001 SLYD001
TL710MJ TL710MJG TL712CD TL712CP	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-12 7-12 7-10,7-12 7-10,7-12	SLYD001 SLYD001 SLCS002 SLCS002
TL721CD TL721CP TL780-05CKC TL780-12CKC	Voltage Comparator Voltage Comparator Voltage Regulator Voltage Regulator	7-10,7-12 7-10,7-12 7-17 7-17	SLCS001 SLCS001 SLYD001 SLYD001
TL780-15CKC TL783CKC TL0808FN TL0808N	Voltage Regulator Voltage Regulator A/D Converter A/D Converter	7-17 7-16 7-14 7-14	SLYD001 SLYD001 SLYD002 SLYD002
TL0809FN TL0809N TL810CJG TL810CP	A/D Converter A/D Converter Voltage Comparator Voltage Comparator	7-14 7-14 7-12 7-12	SLYD002 SLYD002 SLYD001 SLYD001
TL811CJ TL811CN TL820CJ TL820CN	Voltage Comparator Voltage Comparator Voltage Comparator Voltage Comparator	7-12 7-12 7-12 7-12	SLYD001 SLYD001 SLYD001 SLYD001
TL820MJ TL851CN TL852CN TL853CN	Voltage Comparator Sonar Circuit Sonar Circuit Sonar Circuit	7-12 7-22 7-22 7-22	SLYD001 SLYD001 SLYD001 SLSS002
TL1593E TL3013CLU TL3019CLU TL3020CLU	Image Sensor Support Function Hall-Effect Device Hall-Effect Device Hall-Effect Device	8-3 7-21 7-21 7-21	SOYD002 SLFS004 SLFS005 SLFS006
TL3101CLU TL3103CLP TL3103CLU TL4810BDW	Hall-Effect Device Hall-Effect Device Hall-Effect Device Display Driver	7-21 7-21 7-21 6-7	SLFS003 SLFS003 SLFS003 SLYD002
TL4810BIN TL4810BN TL5812IFN TL5812IN	Display Driver Display Driver Display Driver Display Driver	6-7 6-7 6-7 6-7	SLYD002 SLYD002 SLYD002 SLYD002
TL5812N TL7702ACD TL7702ACP TL7702AIP	Display Driver Supply Supervisor Supply Supervisor Supply Supervisor	6-7 7-16 7-16 7-16	SLYD002 SLYD001 SLYD001 SLYD001
TL7705ACD TL7705ACP TL7705AIP TL7709ACD	Supply Supervisor Supply Supervisor Supply Supervisor Supply Supervisor	7-16 7-16 7-16 7-16	SLYD001 SLYD001 SLYD001 SLYD001
TL7709ACP TL7709AIP TL7712ACD TL7712ACP	Supply Supervisor Supply Supervisor Supply Supervisor Supply Supervisor	7-16 7-16 7-16 7-16	SLYD001 SLYD001 SLYD001 SLYD001
TL7712AIP TL7715ACD TL7715ACP TL7715AIP	Supply Supervisor Supply Supervisor Supply Supervisor Supply Supervisor	7-16 7-16 7-16 7-16	SLYD001 SLYD001 SLYD001 SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMDP380ASIC TMDSF2400PK TMDS380LLC TMDS380PC	TMS380 ASIC-LAN Tool Kit DSP2400 Prototype Kit TMS380 802.2 LLC Evaluation Kit IBM PC Token Ring Evaluation Board	4-25,12-2 12-2 4-25,12-2 4-25	SPWT018A SPRT033 SPWT018A SPWT018A
TMDS7040210-08 TMDS7040810-02 TMDS7062220 TMDS3411804420	DEC VAX VMS Assembler Linker PC/MS-DOS Assembler Linker CMOS XDS TMS34010 Software Development Board	4-29 4-29 4-28,4-29 4-14	SND001B SND001B SND001B SPPU002A
TMDS3411804420 TMDS3440200059 TMDS3440200069 TMDS3440200089	TMS34010 Software Development Board VAX Assembler Package, VMS VAX Assembler Package, DEC ULTRIX VAX Assembler Package, UNIX System V	4-14 4-14 4-14 4-14	SPVU003 SPVU004 SPVU004 SPVU004
TMDS3440202208 TMDS3440202308 TMDS3440205059 TMDS3440205069	VAX Graphics/Math Function Library VAX Font Library VAX "C" Compiler Package, VMS VAX "C" Compiler Package, DEC ULTRIX	4-14 4-14 4-14 4-14	SPVB066 SPVU007 SPVU005 SPVU005
TMDS3440205089 TMDS3440802202 TMDS3440802302 TMDS3440805002	VAX "C" Compiler Package, UNIX System V PC Graphics/Math Function Library PC Font Library PC "C" Compiler Package, MS-DOS 2.11 +	4-14 4-14,4-18 4-14,4-18 4-14,4-18	SPVU005 SPVB066 SPVU007 SPVU005
TMDS3440806002 TMDS3440806003 TMDS3440808002 TMDS3469910000	PC Debugger Dev Pkg (Not for Resale) PC Debugger Dev Pkg (for Resale) PC Assembler Package, MS-DOS 2.11 + TMS34010 XDS-22 Real-Time Emulator (US)	4-14,4-18 4-14,4-18 4-14,4-18 4-14	SPVB066A SPVB066A SPVU004 SPVB066A
TMDS3469981000 TMDS3471804000 TMDX380BMP TMD380TWC-1	TMS34010 XDS-22 Real-Time Emulator (EU) TMS34061 Color Graphics Controller Board TMS380 Bridge Design Kit Token Ring Test Wiring Concentrator	4-14 4-14 4-25,12-2 4-25	SPVB066A SPPU019A SPWT018A SPWT018A
TMS27C292-3JL TMS27C292-45JL TMS27C292-50JL TMS27C292JL	16K 35 ns CMOS EPROM, 600-MIL, 5% 16K 45 ns CMOS EPROM, 600-MIL, 10% 16K 50 ns CMOS EPROM, 600-MIL, 10% 16K 45 ns CMOS EPROM, 600-MIL, 5%	10-2 10-2 10-2 10-2	SMLS291A SMLS291A SMLS291A SMLS291A
TMS2732A-17JL TMS2732A-20JL TMS2732A-25JL TMS2732A-45JL	32K NMOS EPROM, 170 ns, JEDEC Pinout 32K NMOS EPROM, 200 ns, JEDEC Pinout 32K NMOS EPROM, 250 ns, JEDEC Pinout 32K NMOS EPROM, 450 ns, JEDEC Pinout	10-2 10-2 10-2 10-2	SMYD006 SMYD006 SMYD006 SMYD006
TMS2764-17JL TMS2764-20JL TMS2764-25JL TMS2764-45JL	64K NMOS EPROM, 170 ns, JEDEC Pinout 64K NMOS EPROM, 200 ns, JEDEC Pinout 64K NMOS EPROM, 250 ns, JEDEC Pinout 64K NMOS EPROM, 450 ns, JEDEC Pinout	10-2 10-2 10-2 10-2	SMYD006 SMYD006 SMYD006 SMYD006
TMS27C64-1JL TMS27C64-2JL TMS27C64-3JL TMS27C64-4JL TMS27C64-15JL TMS27C64-20JL TMS27C64-25JL TMS27C64-30JL TMS27C64-45JL TMS27C64JL	64K CMOS EPROM, 150 ns, 5% VCC 64K CMOS EPROM, 200 ns, 5% VCC 64K CMOS EPROM, 300 ns, 5% VCC 64K CMOS EPROM, 450 ns, 5% VCC 64K CMOS EPROM, 150 ns, 10% VCC 64K CMOS EPROM, 200 ns, 10% VCC 64K CMOS EPROM, 250 ns, 10% VCC 64K CMOS EPROM, 300 ns, 10% VCC 64K CMOS EPROM, 450 ns, 10% VCC 64K CMOS EPROM, 250 ns, 5% VCC	10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2	SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006
TMS27C128-1JL TMS27C128-2JL TMS27C128-3JL TMS27C128-4JL TMS27C128-15JL TMS27C128-20JL TMS27C128-25JL TMS27C128-30JL TMS27C128-45JL TMS27C128JL	128K CMOS EPROM, 150 ns, 5% VCC 128K CMOS EPROM, 200 ns, 5% VCC 128K CMOS EPROM, 300 ns, 5% VCC 128K CMOS EPROM, 450 ns, 5% VCC 128K CMOS EPROM, 150 ns, 10% VCC 128K CMOS EPROM, 200 ns, 10% VCC 128K CMOS EPROM, 250 ns, 10% VCC 128K CMOS EPROM, 300 ns, 10% VCC 128K CMOS EPROM, 450 ns, 10% VCC 128K CMOS EPROM, 250 ns, 5% VCC	10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2 10-2	SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006 SMYD006

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMS27C256-1JL	256K CMOS EPROM, 170 ns, 5% VCC	10-2	SMYD006
TMS27C256-2JL	256K CMOS EPROM, 200 ns, 5% VCC	10-2	SMYD006
TMS27C256-3JL	256K CMOS EPROM, 300 ns, 5% VCC	10-2	SMYD006
TMS27C256-4JL	256K CMOS EPROM, 450 ns, 5% VCC	10-2	SMYD006
TMS27C256-17JL	256K CMOS EPROM, 170 ns, 10% VCC	10-2	SMYD006
TMS27C256-20JL	256K CMOS EPROM, 200 ns, 10% VCC	10-2	SMYD006
TMS27C256-25JL	256K CMOS EPROM, 250 ns, 10% VCC	10-2	SMYD006
TMS27C256-30JL	256K CMOS EPROM, 300 ns, 10% VCC	10-2	SMYD006
TMS27C256-45JL	256K CMOS EPROM, 450 ns, 10% VCC	10-2	SMYD006
TMS27C256-150JL	256K CMOS EPROM, 150 ns, 5% VCC	10-2	SMYD006
TMS27C256JL	256K CMOS EPROM, 250 ns, 5% VCC	10-2	SMYD006
TMS27C512-2JL	512K CMOS EPROM, 200 ns, 5% VCC	10-2	SMLS512A
TMS27C512-3JL	512K CMOS EPROM, 300 ns, 5% VCC	10-2	SMLS512A
TMS27C512-4JL	512K CMOS EPROM, 450 ns, 5% VCC	10-2	SMLS512A
TMS27C512-20JL	512K CMOS EPROM, 200 ns, 10% VCC	10-2	SMLS512A
TMS27C512-25JL	512K CMOS EPROM, 250 ns, 10% VCC	10-2	SMLS512A
TMS27C512-30JL	512K CMOS EPROM, 300 ns, 10% VCC	10-2	SMLS512A
TMS27C512-45JL	512K CMOS EPROM, 450 ns, 10% VCC	10-2	SMLS512A
TMS27C512JL	512K CMOS EPROM, 250 ns, 5% VCC	10-2	SMLS512A
TMX27C010-20JL	1M, 128K × 8 CMOS EPROM, 200 ns, 5% VCC	10-3	SMLS010
TMX27C010-25JL	1M, 128K × 8 CMOS EPROM, 250 ns, 5% VCC	10-3	SMLS010
TMX27C010-30JL	1M, 128K × 8 CMOS EPROM, 300 ns, 5% VCC	10-3	SMLS010
TMX27C010-200JL	1M, 128K × 8 CMOS EPROM, 200 ns, 10% VCC	10-3	SMLS010
TMX27C010-250JL	1M, 128K × 8 CMOS EPROM, 250 ns, 10% VCC	10-3	SMLS010
TMX27C010-300JL	1M, 128K × 8 CMOS EPROM, 300 ns, 10% VCC	10-3	SMLS010
TMX27C210-20JL	1M, 16K × 16 CMOS EPROM, 200 ns, 10% VCC	10-3	SMLS210
TMX27C210-25JL	1M, 16K × 16 CMOS EPROM, 250 ns, 10% VCC	10-3	SMLS210
TMX27C210-30JL	1M, 16K × 16 CMOS EPROM, 300 ns, 10% VCC	10-3	SMLS210
TMX27C210-200JL	1M, 16K × 16 CMOS EPROM, 200 ns, 5% VCC	10-3	SMLS210
TMX27C210-250JL	1M, 16K × 16 CMOS EPROM, 250 ns, 5% VCC	10-3	SMLS210
TMX27C210-300JL	1M, 16K × 16 CMOS EPROM, 300 ns, 5% VCC	10-3	SMLS210
TMS27PC291-3FNL	16K 35 ns CMOS PROM, PLCC, 5%	—	SMLS291A
TMS27PC291-45FNL	16K 45 ns CMOS PROM, PLCC, 10%	—	SMLS291A
TMS27PC291-50FNL	16K 50 ns CMOS PROM, PLCC, 10%	—	SMLS291A
TMS27PC291FNL	16K 45 ns CMOS PROM, PLCC, 5%	—	SMLS291A
TMS27PC64-1NL	64K CMOS PROM, 150 ns, 5% VCC	10-3	SMLS064
TMS27PC64-2NL	64K CMOS PROM, 200 ns, 5% VCC	10-3	SMLS064
TMS27PC64-3NL	64K CMOS PROM, 300 ns, 5% VCC	10-3	SMLS064
TMS27PC64-4NL	64K CMOS PROM, 450 ns, 5% VCC	10-3	SMLS064
TMS27PC64-15NL	64K CMOS PROM, 150 ns, 10% VCC	10-3	SMLS064
TMS27PC64-20NL	64K CMOS PROM, 200 ns, 10% VCC	10-3	SMLS064
TMS27PC64-25NL	64K CMOS PROM, 250 ns, 10% VCC	10-3	SMLS064
TMS27PC64-30NL	64K CMOS PROM, 300 ns, 10% VCC	10-3	SMLS064
TMS27PC64-45NL	64K CMOS PROM, 450 ns, 10% VCC	10-3	SMLS064
TMS27PC64NL	64K CMOS PROM, 250 ns, 5% VCC	10-3	SMLS064
TMS27PC128-1NL	128K CMOS PROM, 170 ns, 5% VCC	10-3	SMPS128A
TMS27PC128-2NL	128K CMOS PROM, 200 ns, 5% VCC	10-3	SMPS128A
TMS27PC128-3NL	128K CMOS PROM, 300 ns, 5% VCC	10-3	SMPS128A
TMS27PC128-4NL	128K CMOS PROM, 450 ns, 5% VCC	10-3	SMPS128A
TMS27PC128-20NL	128K CMOS PROM, 200 ns, 10% VCC	10-3	SMPS128A
TMS27PC128-25NL	128K CMOS PROM, 250 ns, 10% VCC	10-3	SMPS128A
TMS27PC128-30NL	128K CMOS PROM, 300 ns, 10% VCC	10-3	SMPS128A
TMS27PC128-45NL	128K CMOS PROM, 450 ns, 10% VCC	10-3	SMPS128A
TMS27PC128NL	128K CMOS PROM, 250 ns, 5% VCC	10-3	SMPS128A
TMS27PC128-1FML	128K CMOS PROM, 170 ns, 5% VCC, PLCC	10-3	SMPS128A
TMS27PC128-2FML	128K CMOS PROM, 200 ns, 5% VCC, PLCC	10-3	SMPS128A
TMS27PC128-3FML	128K CMOS PROM, 300 ns, 5% VCC, PLCC	10-3	SMPS128A
TMS27PC128-4FML	128K CMOS PROM, 450 ns, 5% VCC, PLCC	10-3	SMPS128A
TMS27PC128-20FML	128K CMOS PROM, 200 ns, 10% VCC, PLCC	10-3	SMPS128A
TMS27PC128-25FML	128K CMOS PROM, 250 ns, 10% VCC, PLCC	10-3	SMPS128A
TMS27PC128-30FML	128K CMOS PROM, 300 ns, 10% VCC, PLCC	10-3	SMPS128A
TMS27PC128-45FML	128K CMOS PROM, 450 ns, 10% VCC, PLCC	10-3	SMPS128A
TMS27PC128FML	128K CMOS PROM, 250 ns, 5% VCC, PLCC	10-3	SMPS128A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMS27PC256-2NL	256K CMOS PROM, 200 ns, 5% VCC	10-3	SMPS256A
TMS27PC256-3NL	256K CMOS PROM, 300 ns, 5% VCC	10-3	SMPS256A
TMS27PC256-4NL	256K CMOS PROM, 450 ns, 5% VCC	10-3	SMPS256A
TMS27PC256-20NL	256K CMOS PROM, 200 ns, 10% VCC	10-3	SMPS256A
TMS27PC256-25NL	256K CMOS PROM, 250 ns, 10% VCC	10-3	SMPS256A
TMS27PC256-30NL	256K CMOS PROM, 300 ns, 10% VCC	10-3	SMPS256A
TMS27PC256-45NL	256K CMOS PROM, 450 ns, 10% VCC	10-3	SMPS256A
TMS27PC256NL	256K CMOS PROM, 250 ns, 5% VCC	10-3	SMPS256A
TMS27PC256-2FML	256K CMOS PROM, 200 ns, 5% VCC, PLCC	10-3	SMPS256A
TMS27PC256-3FML	256K CMOS PROM, 300 ns, 5% VCC, PLCC	10-3	SMPS256A
TMS27PC256-4FML	256K CMOS PROM, 450 ns, 5% VCC, PLCC	10-3	SMPS256A
TMS27PC256-20FML	256K CMOS PROM, 200 ns, 10% VCC, PLCC	10-3	SMPS256A
TMS27PC256-25FML	256K CMOS PROM, 250 ns, 10% VCC, PLCC	10-3	SMPS256A
TMS27PC256-30FML	256K CMOS PROM, 300 ns, 10% VCC, PLCC	10-3	SMPS256A
TMS27PC256-45FML	256K CMOS PROM, 450 ns, 10% VCC, PLCC	10-3	SMPS256A
TMS27PC256FML	256K CMOS PROM, 250 ns, 5% VCC, PLCC	10-3	SMPS256A
TMS27PC512-2NL	512K CMOS PROM, 200 ns, 5% VCC	10-3	SMPS512
TMS27PC512-3NL	512K CMOS PROM, 300 ns, 5% VCC	10-3	SMPS512
TMS27PC512-4NL	512K CMOS PROM, 450 ns, 5% VCC	10-3	SMPS512
TMS27PC512-20NL	512K CMOS PROM, 200 ns, 10% VCC	10-3	SMPS512
TMS27PC512-25NL	512K CMOS PROM, 250 ns, 10% VCC	10-3	SMPS512
TMS27PC512-30NL	512K CMOS PROM, 300 ns, 10% VCC	10-3	SMPS512
TMS27PC512-45NL	512K CMOS PROM, 450 ns, 10% VCC	10-3	SMPS512
TMS27PC512NL	512K CMOS PROM, 250 ns, 5% VCC	10-3	SMPS512
TMS27PC512-2FML	512K CMOS PROM, 200 ns, 5% VCC, PLCC	10-3	SMPS512
TMS27PC512-3FML	512K CMOS PROM, 300 ns, 5% VCC, PLCC	10-3	SMPS512
TMS27PC512-4FML	512K CMOS PROM, 450 ns, 5% VCC, PLCC	10-3	SMPS512
TMS27PC512-20FML	512K CMOS PROM, 200 ns, 10% VCC, PLCC	10-3	SMPS512
TMS27PC512-25FML	512K CMOS PROM, 250 ns, 10% VCC, PLCC	10-3	SMPS512
TMS27PC512-30FML	512K CMOS PROM, 300 ns, 10% VCC, PLCC	10-3	SMPS512
TMS27PC512-45FML	512K CMOS PROM, 450 ns, 10% VCC, PLCC	10-3	SMPS512
TMS27PC512FML	512K CMOS PROM, 250 ns, 5% VCC, PLCC	10-3	SMPS512
TMS70A2400	DSP2400 V.22bis Modem Controller	4-6	SPRT033
TMS70C00AFN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C00AN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C02FN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C02N	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C20AFN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C20AN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C20AN2	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C40AFN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C40AN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C40AN2	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C42FN	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS70C42N	8-Bit CMOS Microcontroller	4-28	SPNT020
TMS77C82JD	8-Bit CMOS EPROM Microcontroller	4-28	SPNT020
TMS320A2400	DSP2400 V.22bis Modem Chip-Set DSP	4-6	SPRT033
TMS320C10FN	CMOS 1st-Generation DSP (20 MHz)	4-5	SPRS009
TMS320C10FN-25	CMOS 1st-Generation DSP (25 MHz)	4-5	SPRS009
TMS320C10N	CMOS 1st-Generation DSP (20 MHz)	4-5	SPRS009
TMS320C10N-25	CMOS 1st-Generation DSP (25 MHz)	4-5	SPRS009
TMS320C15FN	320C10 DSP (20 MHz) with more RAM and ROM	4-5	SPRS009
TMS320C15FN-25	320C15 DSP (25 MHz)	4-5	SPRS009
TMS320C15N	320C10 DSP (20 MHz) with more RAM and ROM	4-5	SPRS009
TMS320C15N-25	320C15 DSP (25 MHz)	4-5	SPRS009
TMS320C17FN	320C15 DSP with Serial Port and Coproc.I/F	4-5	SPRS009
TMS320C17FN-25	320C17 DSP (25 MHz)	4-5	SPRS009
TMS320C17N	320C15 DSP with Serial Port and Coproc.I/F	4-5	SPRS009
TMS320C17N-25	320C17 DSP (25 MHz)	4-5	SPRS009
TMS320C25FN	CMOS 2nd-Generation DSP (40 MHz)	4-5	SPRS010
TMS320C30	CMOS 3rd-Generation DSP (33 Mflop)	4-5	SPRT036

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMS320DDK TMS320 Dev Tools TMS320E15JD TMS320E17JD	TMS320 DSP Design Kit TMS320 Development Tools 320C15 DSP (20 MHz) with 4K-Words EPROM 320C17 DSP (20 MHz) with 4K-Words EPROM	12-2 4-6 4-5 4-5	SPRV011 SPRU011 SPRS009 SPRS009
TMS320SA32N TMS320 Workshops " " " " " "	32Kbps ADPCM Transcoder (320C10-based) See RTCWS-320DSP1 " RTCWS-320DSP1A " RTCWS-320DSP1B	4-6	SPRS011 SSRC007 SSRC007 SSRC007
" " " " " " TMS340GDK TMS340 Workshops	" RTCWS-320DSP2 " RTCWS-320DSP2A TMS340 Graphics Design Kit See RTCWS-34010	4-14,12-3 12-5	SSRC007 SSRC007 SPVZ001 SSRC007
" " " TMS380LDK-1 TMS380 Workshops " " "	" RTCWS-34061 TMS380 Design-In Accelerator Kit See RTCWS-380LAN1 " RCTWS-380LAN1A	12-5 4-25,12-2	SSRC007 SPWT018A SSRC007 SSRC007
TMS2150-35DW TMS2150-35JD TMS2150-35NT TMS2150-45DW	Cache Address Comparator Cache Address Comparator Cache Address Comparator Cache Address Comparator	4-61 4-61 4-61 4-61	SDVD001 SDVD001 SDVD001 SDVD001
TMS2150-45JD TMS2150-45NT TMS2150-55JD TMS3471C	Cache Address Comparator Cache Address Comparator Cache Address Comparator Image Sensor Support Function	4-61 4-61 4-61 8-3	SDVD001 SDVD001 SDVD001 SOYD002
TMS3472A TMS3473B	Image Sensor Support Function Image Sensor Support Function	8-3 8-3	SOYD002 SOYD002
TMS4256-10FML TMS4256-10NL	256K × 1 DRAM 100 ns Page Mode, PLCC 256K × 1 DRAM 100 ns Page Mode, DIP	10-4 10-4	SMQS256B SMQS256B
TMS4256-12FML TMS4256-12FMLR TMS4256-12NL	256K × 1 DRAM 120 ns Page Mode, PLCC 256K × 1 DRAM 120 ns Page Mode, Tape and Reel 256K × 1 DRAM 120 ns Page Mode, DIP	10-4 10-4 10-4	SMQS256B SMQS256B SMQS256B
TMS4256-15FML TMS4256-15FMLR TMS4256-15NL TMS4256FML	256K × 1 DRAM 150 ns Page Mode, PLCC 256K × 1 DRAM 150 ns Page Mode, Tape & Reel 256K × 1 DRAM 150 ns Page Mode, DIP 256K × 1 DRAM Page Mode, PLCC	10-4 10-4 10-4 10-4	SMQS256B SMQS256B SMQS256B SMQS256B
TMS4256NL TMS4257-10FML TMS4257-10NL	256K × 1 DRAM Page Mode, DIP 256K × 1 DRAM 100 ns Nibble Mode, PLCC 256K × 1 DRAM 100 ns Nibble Mode, DIP	10-4 10-4 10-4	SMQS256B SMQS256B SMQS256B
TMS4257-12FML TMS4257-12FMLR TMS4257-12NL	256K × 1 DRAM 120 ns Nibble Mode, PLCC 256K × 1 DRAM 120 ns Nibble, PLCC Tape/Reel 256K × 1 DRAM 120 ns Nibble Mode, DIP	10-4 10-4 10-4	SMQS256B SMQS256B SMQS256B
TMS4257-15FML TMS4257-15FMLR TMS4257-15NL	256K × 1 DRAM 150 ns Nibble Mode, PLCC Pkg 256K × 1 DRAM 150 ns Nibble, PLCC Tape/Reel 256K × 1 DRAM 150 ns Nibble Mode, DIP	10-4 10-4 10-4	SMQS256B SMQS256B SMQS256B
TMS4257FML TMS4257NL	256K × 1 DRAM Nibble Mode, PLCC 256K × 1 DRAM Nibble Mode, DIP	10-4 10-4	SMQS256B SMQS256B
TMS4C1024-10DJ TMS4C1024-10N	1M × 1 DRAM 100 ns Page Mode, SOJ 1M × 1 DRAM 100 ns Page Mode, DIP	10-4 10-4	SMGS024A SMGS024A
TMS4C1024-12DJ TMS4C1024-12N	1M × 1 DRAM 120 ns Page Mode, SOJ 1M × 1 DRAM 120 ns Page Mode, DIP	10-4 10-4	SMGS024A SMGS024A
TMS4C1024-15DJ TMS4C1024-15N	1M × 1 DRAM 150 ns Page Mode, SOJ 1M × 1 DRAM 150 ns Page Mode, DIP	10-4 10-4	SMGS024A SMGS024A
TMS4C1024DJ TMS4C1024N	1M × 1 DRAM Page Mode, SOJ 1M × 1 DRAM Page Mode, DIP	10-4 10-4	SMGS024A SMGS024A
TMS4C1025-10DJ TMS4C1025-10N	1M × 1 DRAM 100 ns Nibble Mode, SOJ 1M × 1 DRAM 100 ns Nibble Mode, DIP	10-4 10-4	SMGS025A SMGS025A

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMS4C1025-12DJ TMS4C1025-12N	1M × 1 DRAM 120 ns Nibble Mode, SOJ 1M × 1 DRAM 120 ns Nibble Mode, DIP	10-4 10-4	SMGS025A SMGS025A
TMS4C1025-15DJ TMS4C1025-15N	1M × 1 DRAM 150 ns Nibble Mode, SOJ 1M × 1 DRAM 150 ns Nibble Mode, DIP	10-4 10-4	SMGS025A SMGS025A
TMS4C1025DJ TMS4C1025N	1M × 1 DRAM Nibble Mode, SOJ 1M × 1 DRAM Nibble Mode, DIP	10-4 10-4	SMGS025A SMGS025A
TMS4C1027-10DJ TMS4C1027-10N	1M × 1 DRAM 100 ns Static Column Decode 1M × 1 DRAM 100 ns Static Column Decode	10-4 10-4	SMGS027 SMGS027
TMS4C1027-12DJ TMS4C1027-12N	1M × 1 DRAM 120 ns Static Column Decode 1M × 1 DRAM 120 ns Static Column Decode	10-4 10-4	SMGS027 SMGS027
TMS4C1027-15DJ TMS4C1027-15N	1M × 1 DRAM 150 ns Static Column Decode 1M × 1 DRAM 150 ns Static Column Decode	10-4 10-4	SMGS027 SMGS027
TMS4C1027DJ TMS4C1027N	1M × 1 DRAM Static Column Decode, SOJ 1M × 1 DRAM Static Column Decode, DIP	10-4 10-4	SMGS027 SMGS027
TMS4461-12NL TMS4461-15NL TMS4461-12SDL TMS4461-15SDL	256K Multiport Video RAM, 120 ns DIP 256K Multiport Video RAM, 150 ns DIP 256K Multiport Video RAM, 120 ns ZIP 256K Multiport Video RAM, 150 ns ZIP	10-4 10-4 10-4 10-4	SMVS011A SMVS011A SMVS011A SMVS011A
TMS4464-10FML TMS4464-10NL	64K × 4 DRAM 100 ns, PLCC 64K × 4 DRAM 100 ns, DIP	10-4 10-4	SMBS464B SMBS464B
TMS4464-12FML TMS4464-12NL	64K × 4 DRAM 120 ns, PLCC 64K × 4 DRAM 120 ns, DIP	10-4 10-4	SMBS464B SMBS464B
TMS4464-15FML TMS4464-15NL	64K × 4 DRAM 150 ns, PLCC 64K × 4 DRAM 150 ns, DIP	10-4 10-4	SMBS464B SMBS464B
TMS4464FML TMS4464NL	64K × 4 DRAM, PLCC 64K × 4 DRAM, DIP	10-4 10-4	SMBS464B SMBS464B
TMS44C256-10DJ TMS44C256-10N	256K × 4 DRAM 100 ns Page Mode, SOJ 256K × 4 DRAM 100 ns Page Mode, DIP	10-4 10-4	SMGS256 SMGS256
TMS44C256-12DJ TMS44C256-12N	256K × 4 DRAM 120 ns Page Mode, SOJ 256K × 4 DRAM 120 ns Page Mode, DIP	10-4 10-4	SMGS256 SMGS256
TMS44C256-15DJ TMS44C256-15N	256K × 4 DRAM 150 ns Page Mode, SOJ 256K × 4 DRAM 150 ns Page Mode, DIP	10-4 10-4	SMGS256 SMGS256
TMS44C256DJ TMS44C256N	256K × 4 DRAM Page Mode, SOJ 256K × 4 DRAM Page Mode, DIP	10-4 10-4	SMGS256 SMGS256
TMS44C257-10DJ TMS44C257-10N	256K × 4 DRAM 100 ns Static Column Decode 256K × 4 DRAM 100 ns Static Column Decode	10-4 10-4	SMGS257 SMGS257
TMS44C257-12DJ TMS44C257-12N	256K × 4 DRAM 120 ns Static Column Decode 256K × 4 DRAM 120 ns Static Column Decode	10-4 10-4	SMGS257 SMGS257
TMS44C257-15DJ TMS44C257-15N	256K × 4 DRAM 150 ns Static Column Decode 256K × 4 DRAM 150 ns Static Column Decode	10-4 10-4	SMGS257 SMGS257
TMS44C257DJ TMS44C257N	256K × 4 DRAM, Static Column Decode, SOJ 256K × 4 DRAM, Static Column Decode, DIP	10-4 10-4	SMGS257 SMGS257
TMS4500A-150FN TMS4500A-150N TMS4500A-200FN TMS4500A-200N TMS9914A	DRAM Controller DRAM Controller DRAM Controller DRAM Controller General Purpose Interface Bus (GPIB)	3-31 3-31 3-31 3-31 4-28	SDVD001 SDVD001 SDVD001 SDVD001 SPPU013
TMS32010N TMS32010N-14 TMS32010N-25 TMS32011N TMS32020GB	NMOS 1st-Generation DSP (20 MHz) NMOS 1st-Generation DSP (14 MHz) NMOS 1st-Generation DSP (25 MHz) NMOS 32010 DSP (20 MHz) with Serial Port NMOS 2nd-Generation DSP (20 MHz)	4-5 4-5 4-5 4-5 4-5	SPRS009 SPRS009 SPRS009 SPRS009 SPRS010
TMS34010FNL-40 TMS34010FNL-50 TMS34010GDK TMS34061FNL TMS34061FNL-12 TMS34070NL TMS34070NL-20 TMS34070NL-66	Graphics System Processor (40 MHz) Graphics System Processor(50 MHz) TMS34010 Graphics Design Kit Video System Controller (10 MHz) Video System Controller (12.5 MHz) Color Palette (36 MHz) Color Palette (20 MHz) Color Palette (66 MHz)	4-9,4-14 4-9,4-14 4-14,12-3 4-11,4-14 4-11,4-14 4-13,4-14 4-13,4-14 4-13,4-14	SPVU001 SPVU001 SPVB061 SPPU014A SPPU014A SPPU016A SPPU016A SPPU016A



PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
TMS38010JDL TMS38020JDL TMS38030GBL TMS38051NL TMS38052NL	Token Ring Communications Processor Token Ring Protocol Handler Token Ring System Interface Token Ring Interface Controller Token Ring Interface Transceiver	4-21,4-22 4-21,4-22 4-21,4-22 4-21,4-22 4-21,4-22	SPWU001D SPWU001D SPWU001D SPWU001D SPWU001D
TMS99531N TMS99532	Dual Tone Pulse Dialer 300 Baud Modem (Bell 103)	4-28 4-28	SPSS003 SPSS004
TM4256EC4-10L TM4256EC4-12L TM4256EC4-15L	256K × 4 SIP 100 ns Page Mode, Pinned 256K × 4 SIP 120 ns Page Mode, Pinned 256K × 4 SIP 150 ns Page Mode, Pinned	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM4256EL9-10L TM4256EL9-12L TM4256EL9-15L	256K × 9 SIP 100 ns Page Mode, Pinned 256K × 9 SIP 120 ns Page Mode, Pinned 256K × 9 SIP 150 ns Page Mode, Pinned	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM4256FC1-10L TM4256FC1-12L TM4256FC1-15L	1M × 1 SIP 100 ns Page Mode, Pinned 1M × 1 SIP 120 ns Page Mode, Pinned 1M × 1 SIP 150 ns Page Mode, Pinned	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM4256FL8-10L TM4256FL8-12L TM4256FL8-15L	256K × 8 SIP 100 ns Page Mode, Pinned 256K × 8 SIP 120 ns Page Mode, Pinned 256K × 8 SIP 150 ns Page Mode, Pinned	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM4256GU8-10L TM4256GU8-12L TM4256GU8-15L	256K × 8 SIP 100 ns Page Mode, Leadless 256K × 8 SIP 120 ns Page Mode, Leadless 256K × 8 SIP 150 ns Page Mode, Leadless	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM4256GU9-10L TM4256GU9-12L TM4256GU9-15L	256K × 9 SIP 100 ns Page Mode, Leadless 256K × 9 SIP 120 ns Page Mode, Leadless 256K × 9 SIP 150 ns Page Mode, Leadless	10-5 10-5 10-5	SMYD006 SMYD006 SMYD006
TM024EAD9-10L TM024EAD9-12L TM024EAD9-15L	1M × 9 SIP 100ns Page Mode, Leadless 1M × 9 SIP 120ns Page Mode, Leadless 1M × 9 SIP 150ns Page Mode, Leadless	10-5 10-5 10-5	SMMS102B SMMS102B SMMS102B
TM024GAD8-10L TM024GAD8-12L TM024GAD8-15L	1M × 8 SIP 100ns Page Mode, Leadless 1M × 8 SIP 120ns Page Mode, Leadless 1M × 8 SIP 150ns Page Mode, Leadless	10-5 10-5 10-5	SMMS102B SMMS102B SMMS102B
TM024HAC4-10L TM024HAC4-12L TM024HAC4-15L	1M × 4 SIP 100 ns Page Mode, Leaded 1M × 4 SIP 120 ns Page Mode, Leaded 1M × 4 SIP 150 ns Page Mode, Leaded	10-5 10-5 10-5	SMMS104 SMMS104 SMMS104
TSP50C40A TSP50C50 TSP60C20 TSP5110ANL	Speech Synthesizer Speech Processor Speech ROM Voice Synthesis Processor	9-6 9-6 9-6 9-6	SPSS007 SLYD002 SLYD002 SPSS004
TSP5110AN2L TSP5220CNL TSP5220CNS TSP6100	Voice Synthesis Processor Voice Synthesis Processor Voice Synthesis Processor Custom Speech ROM	9-6 9-6 9-6 9-6	SPSS004 SPSS009 SPSS009 SPSS008
μA78L02ACD μA78L02ACLP μA78L02CD μA78L02CLP	Voltage Regulator Voltage Regulator Voltage Regulator Voltage Regulator	7-17 7-17 7-17 7-17	SLVS010 SLVS010 SLVS010 SLVS010
μA78L05ACD μA78L05ACLP μA78L05CD μA78L05CLP	Voltage Regulator Voltage Regulator Voltage Regulator Voltage Regulator	7-17 7-17 7-17 7-17	SLVS010 SLVS010 SLVS010 SLVS010
μA78L06ACLP μA78L06CLP μA78L08ACD μA78L08ACLP	Voltage Regulator Voltage Regulator Voltage Regulator Voltage Regulator	7-17 7-17 7-17 7-17	SLVS010 SLVS010 SLVS010 SLVS010

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
$\mu$ A78L08CD	Voltage Regulator	7-17	SLVS010
$\mu$ A78L08CLP	Voltage Regulator	7-17	SLVS010
$\mu$ A78L09ACL	Voltage Regulator	7-17	SLYD001
$\mu$ A78L09CLP	Voltage Regulator	7-17	SLYD001
$\mu$ A78L10ACD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L10ACL	Voltage Regulator	7-17	SLYD001
$\mu$ A78L10CD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L10CLP	Voltage Regulator	7-17	SLYD001
$\mu$ A78L12ACD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L12ACL	Voltage Regulator	7-17	SLYD001
$\mu$ A78L12CD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L12CLP	Voltage Regulator	7-17	SLYD001
$\mu$ A78L15ACD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L15ACL	Voltage Regulator	7-17	SLYD001
$\mu$ A78L15CD	Voltage Regulator	7-17	SLYD001
$\mu$ A78L15CLP	Voltage Regulator	7-17	SLYD001
$\mu$ A78M05CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M05MFK	Voltage Regulator	7-17	SLYD001
$\mu$ A78M05MJG	Voltage Regulator	7-17	SLYD001
$\mu$ A78M06CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M08CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M10CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M12CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M12MFK	Voltage Regulator	7-17	SLYD001
$\mu$ A78M12MJG	Voltage Regulator	7-17	SLYD001
$\mu$ A78M15CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A78M20CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A78M24CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M05CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M05MFK	Voltage Regulator	7-18	SLYD001
$\mu$ A79M05MJG	Voltage Regulator	7-18	SLYD001
$\mu$ A79M06CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M08CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M12CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M12MFK	Voltage Regulator	7-18	SLYD001
$\mu$ A79M12MJG	Voltage Regulator	7-18	SLYD001
$\mu$ A79M15CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M20CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A79M24CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A709CD	Operational Amplifier	7-2	SLYD001
$\mu$ A709CP	Operational Amplifier	7-2	SLYD001
$\mu$ A710MJ	Voltage Comparator	—	SLYD001
$\mu$ A710MJG	Voltage Comparator	—	SLYD001
$\mu$ A723CD	Voltage Regulator	7-16	SLVS007
$\mu$ A723CJ	Voltage Regulator	7-16	SLYD001
$\mu$ A723CN	Voltage Regulator	7-16	SLYD001
$\mu$ A723MFK	Voltage Regulator	7-16	SLYD001
$\mu$ A723MJ	Voltage Regulator	7-16	SLYD001
$\mu$ A733CD	Video Amplifier	7-10	SLYD001
$\mu$ A733CJ	Video Amplifier	7-10	SLYD001
$\mu$ A733CN	Video Amplifier	7-10	SLYD001
$\mu$ A733MJ	Video Amplifier	7-10	SLYD001
$\mu$ A741CD	Operational Amplifier	7-5	SLYD001
$\mu$ A741CJG	Operational Amplifier	7-5	SLYD001
$\mu$ A741CP	Operational Amplifier	7-5	SLYD001
$\mu$ A741FK	Operational Amplifier	7-5	SLYD001
$\mu$ A741IP	Operational Amplifier	7-5	SLYD001
$\mu$ A741J	Operational Amplifier	7-5	SLYD001
$\mu$ A741JG	Operational Amplifier	7-5	SLYD001
$\mu$ A747CD	Operational Amplifier	7-7	SLYD001

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
$\mu$ A747CJ	Operational Amplifier	7-7	SLYD001
$\mu$ A747CN	Operational Amplifier	7-7	SLYD001
$\mu$ A747FK	Operational Amplifier	7-7	LCC4781
$\mu$ A747J	Operational Amplifier	7-7	SLYD001
$\mu$ A747W	Operational Amplifier	7-7	LCC4781
$\mu$ A747-1FK	Operational Amplifier	7-7	LCC4781
$\mu$ A747-1J	Operational Amplifier	7-7	LCC4781
$\mu$ A747-1W	Operational Amplifier	7-7	LCC4781
$\mu$ A748CD	Operational Amplifier	7-2	SLYD001
$\mu$ A748CJG	Operational Amplifier	7-2	SLYD001
$\mu$ A748CP	Operational Amplifier	7-2	SLYD001
$\mu$ A2240CN	Counter/Timer	7-20	SLYD001
$\mu$ A7805CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7806CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7808CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7810CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7812CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7815CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7818CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7824CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7885CKC	Voltage Regulator	7-17	SLYD001
$\mu$ A7905CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7906CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7908CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7912CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7915CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7918CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7924CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A7952CKC	Voltage Regulator	7-18	SLYD001
$\mu$ A9636ACD	Line Driver	6-2	SLYD002
$\mu$ A9636ACJG	Line Driver	6-2	SLYD002
$\mu$ A9636ACP	Line Driver	6-2	SLYD002
$\mu$ A9637ACD	Line Receiver	6-3	SLYD002
$\mu$ A9637ACJG	Line Receiver	6-3	SLYD002
$\mu$ A9637ACP	Line Receiver	6-3	SLYD002
$\mu$ A9638CD	Line Driver	6-2	SLYD002
$\mu$ A9638CJG	Line Driver	6-2	SLYD002
$\mu$ A9638CP	Line Driver	6-2	SLYD002
$\mu$ A9639CD	Line Receiver	6-3	SLYD002
$\mu$ A9639CP	Line Receiver	6-3	SLYD002
UCN4810AN	Display Driver	6-7	SLYD002
UC3846	PWM Controller	7-19	SLVS016
UC3847	PWM Controller	7-19	SLVS016
UDN2841NE	Motor Driver	6-9	SLYD002
UDN2845NE	Motor Driver	6-9	SLYD002
ULN2001AD	Actuator/Driver	6-9	SLYD002
ULN2001AN	Actuator/Driver	6-9	SLYD002
ULN2002AD	Actuator/Driver	6-9	SLYD002
ULN2002AN	Actuator/Driver	6-9	SLYD002
ULN2003AD	Actuator/Driver	6-9	SLYD002
ULN2003AN	Actuator/Driver	6-9	SLYD002
ULN2004AD	Actuator/Driver	6-9	SLYD002
ULN2004AN	Actuator/Driver	6-9	SLYD002
ULN2005AD	Actuator/Driver	6-9	SLYD002
ULN2005AN	Actuator/Driver	6-9	SLYD002
ULN2064NE	Actuator/Driver	6-9	SLYD002
ULN2065NE	Actuator/Driver	6-9	SLYD002
ULN2066NE	Actuator/Driver	6-9	SLYD002
ULN2067NE	Actuator/Driver	6-9	SLYD002
ULN2068NE	Actuator/Driver	6-9	SLYD002

PRODUCT NUMBER	GENERAL DESCRIPTION	SECTION/ PAGE	TI REFERENCE DOCUMENT
ULN2069NE ULN2074NE ULN2075NE 1N5722	Actuator/Driver Actuator/Driver Actuator/Driver Phototransistor	6-9 6-9 6-9 8-7	SLYD002 SLYD002 SLYD002 SOYD002
1N5723 1N5724 1N5725 3N261	Phototransistor Phototransistor Phototransistor Optocoupler	8-7 8-7 8-7 8-4	SOYD002 SOYD002 SOYD002 SOYD002
3N262 3N263 4N22 4N23	Optocoupler Optocoupler Optocoupler Optocoupler	8-4 8-4 8-4 8-4	SOYD002 SOYD002 SOYD002 SOYD002
4N24 4N25 4N26 4N27	Optocoupler Optocoupler Optocoupler Optocoupler	8-4 8-4 8-4 8-4	SOYD002 SOYD002 SOYD002 SOYD002
4N28 4N35 4N36 4N37	Optocoupler Optocoupler Optocoupler Optocoupler	8-4 8-4 8-4 8-4	SOYD002 SOYD002 SOYD002 SOYD002
4N47 4N48 4N49 6N135	Optocoupler Optocoupler Optocoupler Optocoupler	8-4 8-4 8-4 8-5	SOYD002 SOYD002 SOYD002 SOYD002
6N136 6N137 6N138 6N139	Optocoupler Optocoupler Optocoupler Optocoupler	8-5 8-6 8-6 8-6	SOYD002 SOYD002 SOYD002 SOYD002

# FUNCTIONAL INDEXES

## Application Specific Integrated Circuits (ASIC) Functional Index USING THE FUNCTIONAL INDEXES

The ASIC Functional Index begins with an explanation of TI's ASIC naming convention and an index of logic function prefixes. It is grouped into three categories:

- 1- $\mu$ m TGC100 Series CMOS Gate Arrays
- 1- $\mu$ m TSC500 Series CMOS Standard Cells
- 2- $\mu$ m SystemCell Series CMOS Standard Cells

and matches macros and cells, within each category, to the appropriate function per the following example:

### TGC100 SERIES 1- $\mu$ m CMOS GATE ARRAYS

#### AND Gates

Macro Name	Functional Description
AN210LJ	2-Input AND Gate
AN220LJ	2-Input AND Gate, 2X Drive
AN310LJ	3-Input AND Gate
AN320LJ	3-Input AND Gate, 2X Drive

#### Comparators (Software Macros)

Macro Name	Functional Description
S085LJ	4-Bit Magnitude Comparator
S686LJ	8-Bit Magnitude Comparator
S688LJ	8-Bit Identity Comparator

The TI reference document, containing the most current technical data, is cited at the beginning of each category.

The naming convention for TI's gate array and standard cell functions is shown in Figure 1. An index of logic function prefixes is listed in Table 1.

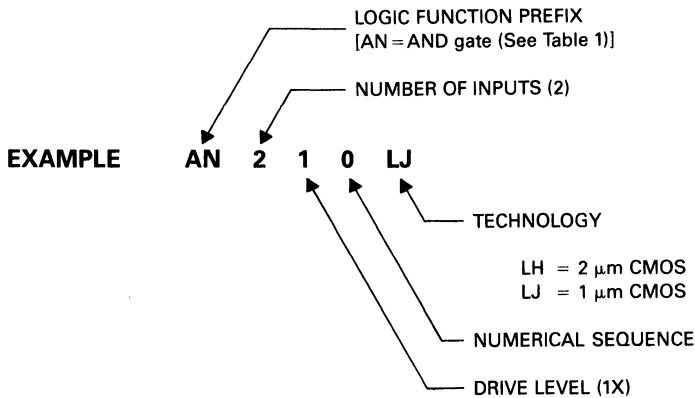


Figure 1. ASIC Naming Convention

Table 1. Index to Function Prefixes

PREFIX	DESCRIPTION	PREFIX	DESCRIPTION
AN	AND Gates	M	Microprocessor Bit-Slice Elements
AD	AND-OR Gates	MU	Multiplexers
BF	Multi-stage AND,NAND,NOR,OR Gates	MV	Multivibrator (One-Shot)
BU	Buffers	NA	NAND Gates
CO	Comparators	NO	NOR Gates
DE	Decoders/Demultiplexers	OP	Output Buffers
DF/DT	Flip-Flops, D-Type	OR	OR Gates
EN	Exclusive-NOR Gates	OS	Oscillators
EX	Exclusive-OR Gates	PD/PR	Pulldown/Pullup Terminators
FI	First-In, First-Out Memories	R	Shift Registers
GM/GS	S-R Latches, Gated Type	RA	Hardwired RAM Macro Cells
IO	Bidirectional I/O Buffers	RF	Register Files
IP	Input Buffers	S	Software Macros
IV	Inverters	TA	Flip-Flops, Toggle Type
JK	Flip-Flops, J-K Type	TD	Scan Flip-Flops
LA	Latches, D-Type and S-R	TO	Tie-Off Gate
LH	Bus Holder Latch		

## 1- $\mu$ m TGC100 SERIES CMOS GATE ARRAYS\*

\*Technical data is contained in the TGC100 Series Family Data Sheet (SRGS006).

### AND Gates

MACRO NAME	FUNCTIONAL DESCRIPTION
AN210LJ	2-Input AND Gate
AN220LJ	2-Input AND Gate, 2X Drive
AN310LJ	3-Input AND Gate
AN320LJ	3-Input AND Gate, 2X Drive
AN410LJ	4-Input AND Gate
AN420LJ	4-Input AND Gate, 2X Drive
AN510LJ	5-Input AND Gate
AN810LJ	8-Input AND Gate

### AND-OR Gates

MACRO NAME	FUNCTIONAL DESCRIPTION
AO220LJ	AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$
AO221LJ	AND-NOR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$
AO241LJ	2-Wide, 2-Input AND-OR Gate

### Arithmetic Operators (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S181LJ	Arithmetic Logic Unit/Function Generator
S182LJ	4-Bit Look-Ahead Carry Generator
S283LJ	4-Bit Binary Full Adder Fast Carry

### Boolean Functions

MACRO NAME	FUNCTIONAL DESCRIPTION
BF001LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2)}$
BF011LJ	AND-NOR Gate $Y = \overline{(A1 \cdot A2) + (B1 \cdot B2) + (C1 \cdot C2)}$
BF022LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot B2 \cdot (C1 + C2)]}$
BF051LJ	OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2)}$
BF053LJ	OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2)}$

### Comparators (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S085LJ	4-Bit Magnitude Comparator
S686LJ	8-Bit Magnitude Comparator
S688LJ	8-Bit Identity Comparator

### Counters (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S161ALJ	Synchronous 4-Bit Binary Counter with Clear
S163ALJ	Synchronous 4-Bit Binary Counter
S191LJ	Synchronous Up/Down Bin Counter with Down/Up Mode Control
S193LJ	Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear)

### Decoders/Demultiplexers (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S138LJ	3-Line to 8-Line Decoder/Demultiplexer
S139LJ	Dual 2-Line to 4-Line Decoder

1

Product Identification and Information

## D-Type Flip-Flops

MACRO NAME	FUNCTIONAL DESCRIPTION
DFB20LJ DTB00LJ DTB10LJ DTB20LJ	D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Preset, Clear D-Type Flip-Flop with Preset, Clear, 1X Drive D-Type Flip-Flop with Preset, Clear, 2X Drive
DTC00LJ DTC10LJ DTC20LJ DTN00LJ	D-Type Flip-Flop with Clear D-Type Flip-Flop with Clear, 1X Drive D-Type Flip-Flop with Clear, 2X Drive D-Type Flip-Flop
DTN10LJ DTN20LJ DTP00LJ DTP10LJ	D-Type Flip-Flop, 1X Drive D-Type Flip-Flop, 2X Drive D-Type Flip-Flop with Preset D-Type Flip-Flop with Preset, 1X Drive
DTP20LJ R2405LJ R2406LJ	D-Type Flip-Flop with Preset, 2X Drive 4-Bit Flip-Flops with Asynchronous Clear 4-Bit Flip-Flops with Complementary Outputs

## D-Type Flip-Flop (Software Macro)

MACRO NAME	FUNCTIONAL DESCRIPTION
S173LJ S175LJ S273LJ S374LJ	4-Bit D-Type Register with 3-State Outputs Quad D-Type Flip-Flop with Complementary Outputs Octal D-Type Flip-Flop 8-Bit D-Type Flip-Flop with 3-State Outputs

## Exclusive-OR/NOR Gates

MACRO NAME	FUNCTIONAL DESCRIPTION
EN210LJ EX210LJ EX220LJ	2-Input Exclusive-NOR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate, 2X Drive

## Inputs/Outputs, Bidirectionals

MACRO NAME	FUNCTIONAL DESCRIPTION
IO#21LJ IO#24LJ IO#41LJ IO#44LJ	2-mA, 3-State I/O Buffer with CMOS Input 2-mA, 3-State I/O Buffer with TTL Input 4-mA, 3-State I/O Buffer with CMOS Input 4-mA, 3-State I/O Buffer with TTL Input
IO#81LJ IO#84LJ IO#21LJ IO#24LJ	8-mA, 3-State I/O Buffer with CMOS Input 8-mA, 3-State I/O Buffer with TTL Input 2-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 2-mA, 3-State I/O Buffer with TTL Input with Pull-Up
IO#41LJ IO#44LJ IO#81LJ IO#84LJ	4-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 4-mA, 3-State I/O Buffer with TTL Input with Pull-Up 8-mA, 3-State I/O Buffer with CMOS Input with Pull-Up 8-mA, 3-State I/O Buffer with TTL Input with Pull-Up
IO#21LJ IO#24LJ IO#41LJ IO#44LJ	2-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 2-mA, 3-State I/O Buffer with TTL Input with Pull-Down 4-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 4-mA, 3-State I/O Buffer with TTL Input with Pull-Down
IO#81LJ IO#84LJ	8-mA, 3-State I/O Buffer with CMOS Input with Pull-Down 8-mA, 3-State I/O Buffer with TTL Input with Pull-Down

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.



## Inputs

MACRO NAME	FUNCTIONAL DESCRIPTION
IPI00LJ IPI01LJ IPI04LJ IPI06LJ	Inverting CMOS-Compatible Input Buffer CMOS-Compatible Input Buffer TTL-Compatible Input Buffer CMOS-Compatible Inverting Input Buffer with Hysteresis
IPL01LJ IPL04LJ IPU01LJ IPU04LJ	CMOS-Compatible Input Buffer with Pullup TTL-Compatible Input Buffer with Pullup CMOS-Compatible Input Buffer with Pulldown TTL-Compatible Input Buffer with Pulldown

## Inverters/Buffers

MACRO NAME	FUNCTIONAL DESCRIPTION
BU130LJ BU150LJ IV110LJ IV120LJ	Delay Buffer, 3X Drive Delay Buffer, 5X Drive Inverter Inverter, 2X Drive
IV140LJ IV211LJ S244LJ	Inverter, 4X Drive Inverting 3-State Buffer with Low Enable Octal Internal Bus Buffer with 3-State Outputs

## J-K Flip-Flops

MACRO NAME	FUNCTIONAL DESCRIPTION
JKB20LJ JKB21LJ	J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive

## Latches

MACRO NAME	FUNCTIONAL DESCRIPTION
LAB20LJ LAH20LJ LAH22LJ LH110LJ LH400LJ	S-R Latch, 2X Drive D-Type Latch with High Enable, 2X Drive D-Type Latch with Low Enable and Clear, 2X Drive 3-State Bus Holder 4-Bit Latch

## Latches (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S373LJ S375LJ	8-Bit D-Type Latch with 3-State Outputs 4-Bit Bistable Latch

## Multiplexer

MACRO NAME	FUNCTIONAL DESCRIPTION
MU111LJ	2-Line to 1-Line Multiplexer

## Multiplexers (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S150LJ S151LJ S153LJ S157LJ	16-line to 1-line Multiplexer 8-Line to 1-Line Multiplexer Dual 4-Line to 1-Line Multiplexer Quad 2-Line to 1-Line Multiplexer

## NAND Gates

MACRO NAME	FUNCTIONAL DESCRIPTION
NA210LJ NA220LJ NA310LJ NA320LJ	2-Input NAND Gate 2-Input NAND Gate, 2X Drive 3-Input NAND Gate 3-Input NAND Gate, 2X Drive
NA410LJ NA420LJ NA510LJ NA520LJ	4-Input NAND Gate 4-Input NAND Gate, 2X Drive 5-Input NAND Gate 5-Input NAND Gate, 2X Drive
NA810LJ NA820LJ	8-Input NAND Gate 8-Input NAND Gate, 2X Drive

## NOR GATES

MACRO NAME	FUNCTIONAL DESCRIPTION
NO210LJ NO220LJ NO310LJ NO320LJ	2-Input NOR Gate 2-Input NOR Gate, 2X Drive 3-Input NOR Gate 3-Input NOR Gate, 2X Drive
NO410LJ NO420LJ NO510LJ NO520LJ	4-Input NOR Gate 4-Input NOR Gate, 2X Drive 5-Input NOR Gate 5-Input NOR Gate, 2X Drive
NO810LJ NO820LJ	8-Input NOR Gate 8-Input NOR Gate, 2X Drive

## OR Gates

MACRO NAME	FUNCTIONAL DESCRIPTION
OR210LJ OR220LJ OR310LJ OR320LJ	2-Input OR Gate 2-Input OR Gate, 2X Drive 3-Input OR Gate 3-Input OR Gate, 2X Drive
OR410LJ OR420LJ OR510LJ OR810LJ	4-Input OR Gate 4-Input OR Gate, 2X Drive 5-Input OR Gate 8-Input OR Gate

## OR-NAND Gate

MACRO NAME	FUNCTIONAL DESCRIPTION
OA241LJ	2-Wide, 2-Input AND-OR Invert Gate

## Outputs

MACRO NAME	FUNCTIONAL DESCRIPTION
OP#20LJ OP#21LJ OP#23LJ OP#24LJ	2-mA, Totem-Pole Output Buffer 2-mA, Open-Drain Output Buffer 2-mA, 3-State Output Buffer with Low Enable 2-mA, P-Channel Open-Drain Output Buffer
OP#40LJ OP#41LJ OP#43LJ OP#44LJ	4-mA, Totem-Pole Output Buffer 4-mA, Open-Drain Output Buffer 4-mA, 3-State Output Buffer with Low Enable 4-mA, P-Channel Open-Drain Output Buffer
OP#80LJ OP#81LJ OP#83LJ OP#84LJ	8-mA, Totem-Pole Output Buffer 8-mA, Open-Drain Output Buffer 8-mA, 3-State Output Buffer with Low Enable 8-mA, P-Channel Open-Drain Output Buffer

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

### Parity Tree (Software Macro)

MACRO NAME	FUNCTIONAL DESCRIPTION
S180XLJ	8-Bit Odd/Even Parity Tree

### Shift Registers (Software Macros)

MACRO NAME	FUNCTIONAL DESCRIPTION
S164LJ S165LJ S194ALJ	8-Bit Parallel-Out Serial Shift Registers Parallel-Load 8-Bit Shift Registers Bidirectional Universal Shift Registers

### Toggle Flip-Flop

MACRO NAME	FUNCTIONAL DESCRIPTION
TAB20LJ	Toggle Flip-Flop with Preset, Clear, 2X Drive

### Tie-Off Gate

MACRO NAME	FUNCTIONAL DESCRIPTION
TO010LJ	High-Level and Low-Level Tie-Off Gate

## 1- $\mu$ m TSC500 SERIES CMOS STANDARD CELLS\*

\*Technical data is contained in the TCS500 Series Family Data Sheet (SRSS033).

### AND Gates

CELL NAME	FUNCTIONAL DESCRIPTION
AN210LJ	2-Input AND Gate
AN220LJ	2-Input AND Gate, 2X Drive
AN240LJ	2-Input AND Gate, 4X Drive
AN260LJ	2-Input AND Gate, 6X Drive
AN310LJ	3-Input AND Gate
AN320LJ	3-Input AND Gate, 2X Drive
AN340LJ	3-Input AND Gate, 4X Drive
AN360LJ	3-Input AND Gate, 6X Drive
AN410LJ	4-Input AND Gate
AN420LJ	4-Input AND Gate, 2X Drive
AN440LJ	4-Input AND Gate, 4X Drive
AN460LJ	4-Input AND Gate, 6X Drive
AN510LJ	5-Input AND Gate
AN810LJ	8-Input AND Gate

### AND-OR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
AO220LJ	AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$
AO221LJ	AND-NOR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$

### Arithmetic Operators (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S181LJ	Arithmetic Logic Unit/Function Generator
S283LJ	4-Bit Binary Full Adder, Fast Carry

### Boolean Functions

CELL NAME	FUNCTIONAL DESCRIPTION
BF001LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2)}$
BF002LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3)}$
BF003LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2)}$
BF004LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2 \cdot B3)}$
BF005LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + (B1 \cdot B2 \cdot B3)}$
BF006LJ	AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2)}$
BF007LJ	AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2 \cdot B3)}$
BF008LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2)}$
BF009LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$
BF010LJ	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$
BF011LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2) + (C1 \cdot C2)}$
BF012LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$
BF013LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$
BF014LJ	AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$
BF015LJ	OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + C2)]}$
BF016LJ	AND-OR-NAND Gate $Y = \overline{A1 + [(B1 + B2) \cdot (C1 + C2)]}$
BF017LJ	OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot B2 \cdot (C1 + C2)]}$
BF020LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot (C1 + C2)]}$
BF022LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot B2 \cdot (C1 + C2)]}$
BF025LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2)]}$
BF027LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot B2 \cdot (C1 + C2)]}$
BF028LJ	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2) \cdot (D1 + D2)]}$
BF030LJ	AND-OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + (D1 \cdot D2))]}$
BF034LJ	AND-OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot (C1 + (D1 \cdot D2))]}$
BF035LJ	AND-OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot ((C1 \cdot C2) + (D1 \cdot D2))]}$
BF051LJ	OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2)}$
BF052LJ	OR-NAND Gate $Y = \overline{A1 \cdot (B1 + B2 + B3)}$
BF053LJ	OR-NAND Gate $Y = \overline{(A1 + A2) \cdot (B1 + B2)}$

## Boolean Functions (Continued)

CELL NAME	FUNCTIONAL DESCRIPTION
BF054LJ	OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot (B1 + B2 + B3)$
BF055LJ	OR-NAND Gate $Y = \overline{(A1 + A2 + A3)} \cdot (B1 + B2 + B3)$
BF056LJ	OR-NAND Gate $Y = \overline{A1 \cdot A2} \cdot (B1 + B2)$
BF057LJ	OR-NAND Gate $Y = \overline{A1 \cdot A2} \cdot (B1 + B2 + B3)$
BF058LJ	OR-NAND Gate $Y = \overline{A1} \cdot (B1 + B2) \cdot (C1 + C2)$
BF059LJ	OR-NAND Gate $Y = \overline{A1} \cdot (B1 + B2) \cdot (C1 + C2 + C3)$
BF060LJ	OR-NAND Gate $Y = \overline{A1} \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$
BF062LJ	OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot (B1 + B2) \cdot (C1 + C2 + C3)$
BF063LJ	OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$
BF064LJ	OR-NAND Gate $Y = \overline{(A1 + A2 + A3)} \cdot (B1 + B2 + B3) \cdot (C1 + C2 + C3)$
BF065LJ	AND-OR-NAND Gate $Y = \overline{A1} \cdot [B1 + (C1 \cdot C2)]$
BF066LJ	AND-OR-NAND Gate $Y = \overline{A1} \cdot [(B1 \cdot B2) + (C1 \cdot C2)]$
BF067LJ	AND-OR-NAND Gate $Y = \overline{A1} \cdot [B1 + B2 + (C1 \cdot C2)]$
BF068LJ	AND-OR-NAND Gate $Y = \overline{A1} \cdot [B1 + (C1 \cdot C2) + (D1 \cdot D2)]$
BF069LJ	AND-OR-NAND Gate $Y = \overline{A1} \cdot [(B1 \cdot B2) + (C1 \cdot C2) + (D1 \cdot D2)]$
BF070LJ	AND-OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot [B1 + (C1 \cdot C2)]$
BF071LJ	AND-OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot [(B1 \cdot B2) + (C1 \cdot C2)]$
BF072LJ	AND-OR-NAND Gate $Y = \overline{(A1 + A2)} \cdot [B1 + B2 + (C1 \cdot C2)]$
BF075LJ	AND-OR-NAND Gate $Y = \overline{(A1 + A2 + A3)} \cdot [B1 + (C1 \cdot C2)]$
BF080LJ	OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot [B1 + (C1 \cdot (D1 + D2))]$
BF081LJ	OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot [B1 + ((C1 + C2) \cdot (D1 + D2))]$
BF082LJ	OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot [(B1 \cdot B2) + (C1 \cdot (D1 + D2))]$
BF088LJ	OR-AND-OR-NAND Gate $Y = \overline{(A1 + A2 + A3)} \cdot [B1 + (C1 \cdot (D1 + D2))]$

## Buffers, 3-State (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S244LJ	Octal Internal Bus Buffer with 3-State Outputs
S245LJ	Octal Internal 3-State Bus Transceiver

## Comparators (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S085LJ	4-Bit Magnitude Comparator
S686LJ	8-Bit Magnitude Comparator
S688LJ	8-Bit Identity Comparator

## Counters

CELL NAME	FUNCTIONAL DESCRIPTION
R2408LJ	4-Bit Ripple Counter

## Counters (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S161ALJ	Synchronous 4-Bit Binary Counter with Clear
S163ALJ	Synchronous 4-Bit Binary Counter
S177LJ	1-Bit and 3-Bit Binary Ripple Counters
S191LJ	Synchronous 4-Bit Up/Down Binary Counter with Down/Up Mode Control
S193LJ	Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear)
S393LJ	Dual 4-Bit Ripple Counters
S590LJ	8-Bit Binary Counter with 3-State Output Register
S593XLJ	8-Bit Binary Counter with Input Register
S669LJ	Synchronous 4-Bit Up/Down Binary Counter with Look-Ahead

## Decoders/Demultiplexers

CELL NAME	FUNCTIONAL DESCRIPTION
DE210LJ DE212LJ	2-Line to 4-Line Decoder 2-Line to 4-Line Decoder with High Enable

## Decoders/Demultiplexers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S137LJ S138LJ S139LJ S155LJ	3-Line to 8-Line Decoder with Address Latches 3-Line to 8-Line Decoder/Demultiplexer Dual 2-Line to 4-Line Decoder Dual 2-Line to 4-Line Decoder with Data, Enable

## D-Type Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
DFB20LJ DFC20LJ DFN20LJ DFP20LJ	D-Type Flip-Flop with Preset, Clear, 2X Drive D-Type Flip-Flop with Clear, 2X Drive D-Type Flip-Flop, 2X Drive D-Type Flip-Flop with Preset, 2X Drive
DFY20LJ DFZ20LJ DTB10LJ DTC10LJ	D-Type Flip-Flop with Grounded-D, Preset, 2X Drive D-Type Flip-Flop with Grounded-D Input, Preset, Clear, 2X Drive D-Type Flip-Flop with Preset, Clear, 1X Drive D-Type Flip-Flop with Clear, 1X Drive
DTN10LJ DTP10LJ R2405LJ R2406LJ R2407LJ	D-Type Flip-Flop, 1X Drive D-Type Flip-Flop with Preset, 1X Drive 4-Bit Flip-Flops with Asynchronous Clear 4-Bit Flip-Flops with Complementary Outputs 4-Bit Flip-Flops with 3-State Outputs

## D-Type Flip-Flops (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S173LJ S174LJ S175LJ S273LJ S374LJ	4-Bit D-Type Register with 3-State Outputs Hex D-Type Flip-Flop Quad D-Type Flip-Flop with Complementary Outputs Octal D-Type Flip-Flop 8-Bit D-Type Flip-Flop with 3-State Outputs

## Exclusive-OR/NOR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
EN210LJ EX210LJ EX211LJ EX220LJ	2-Input Exclusive-NOR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate 2-Input Exclusive-OR Gate, 2X Drive
EX221LJ EX240LJ EX241LJ	2-Input Exclusive-OR Gate, 2X Drive 2-Input Exclusive-OR Gate, 4X Drive 2-Input Exclusive-OR Gate, 4X Drive

## First-In-First-Out Memories

CELL NAME	FUNCTIONAL DESCRIPTION
FI503LJ	32-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flags
FI603LJ	64-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flags
FI703LJ	128-Word by 9-Bit FIFO with 3-State Outputs, Enhanced Flag

## Gated S-R/S-R Latches

CELL NAME	FUNCTIONAL DESCRIPTION
GMS10LJ	5-Input Gated S-R Latch with Separate Set
GM010LJ	4-Input Gated S-R Latch
GM110LJ	5-Input Gated S-R Latch with Separate Reset
GM210LJ	6-Input Gated S-R Latch with Separate Set, Reset
GM310LJ	6-Input Gated S-R Latch
GM410LJ	7-Input Gated S-R Latch with Separate Reset
GM510LJ	8-Input Gated S-R Latch with Separate Set, Reset
GSS10LJ	5-Input Gated S-R Latch with Separate Set
GS010LJ	4-Input Gated S-R Latch
GS110LJ	5-Input Gated S-R Latch with Separate Reset
GS210LJ	6-Input Gated S-R Latch with Separate Set, Reset
GS310LJ	6-Input Gated S-R Latch
GS410LJ	7-Input Gated S-R Latch with Separate Reset
GS510LJ	8-Input Gated S-R Latch with Separate Set, Reset

## Inputs/Outputs, Bidirectionals

CELL NAME	FUNCTIONAL DESCRIPTION
IO#21LJ	2-mA, Push-Pull I/O Buffer with CMOS Input
IO#41LJ	4-mA, Push-Pull I/O Buffer with CMOS Input
IO#61LJ	6-mA, Push-Pull I/O Buffer with CMOS Input
IO#01LJ	10-mA, Push-Pull I/O Buffer with CMOS Input
IO#A1LJ	16-mA, Push-Pull I/O Buffer with CMOS Input
IO#B1LJ	16/24-mA, Push-Pull I/O Buffer with CMOS Input
IO#E1LJ	16/48-mA, Push-Pull I/O Buffer with CMOS Input
IO#G1LJ	16/64-mA, Push-Pull I/O Buffer with CMOS Input
IO#24LJ	2-mA, Push-Pull I/O Buffer with TTL Input
IO#44LJ	4-mA, Push-Pull I/O Buffer with TTL Input
IO#64LJ	6-mA, Push-Pull I/O Buffer with TTL Input
IO#04LJ	10-mA, Push-Pull I/O Buffer with TTL Input
IO#A4LJ	16-mA, Push-Pull I/O Buffer with TTL Input
IO#B4LJ	16/24-mA, Push-Pull I/O Buffer with TTL Input
IO#E4LJ	16/48-mA, Push-Pull I/O Buffer with TTL Input
IO#G4LJ	16/64-mA, Push-Pull I/O Buffer with TTL Input
IO#2HLJ	2-mA, Open-Drain I/O Buffer with CMOS Input
IO#4HLJ	4-mA, Open-Drain I/O Buffer with CMOS Input
IO#6HLJ	6-mA, Open-Drain I/O Buffer with CMOS Input
IO#0HLJ	10-mA, Open-Drain I/O Buffer with CMOS Input
IO#AHLJ	16-mA, Open-Drain I/O Buffer with CMOS Input
IO#BHLJ	24-mA, Open-Drain I/O Buffer with CMOS Input
IO#EHLJ	48-mA, Open-Drain I/O Buffer with CMOS Input
IO#GHLJ	64-mA, Open-Drain I/O Buffer with CMOS Input
IO#2KLJ	2-mA, Open-Drain I/O Buffer with TTL Input
IO#4KLJ	4-mA, Open-Drain I/O Buffer with TTL Input
IO#6KLJ	6-mA, Open-Drain I/O Buffer with TTL Input
IO#0KLJ	10-mA, Open-Drain I/O Buffer with TTL Input
IO#AKLJ	16-mA, Open-Drain I/O Buffer with TTL Input
IO#BKLJ	24-mA, Open-Drain I/O Buffer with TTL Input
IO#EKLJ	48-mA, Open-Drain I/O Buffer with TTL Input
IO#GKLJ	64-mA, Open-Drain I/O Buffer with TTL Input

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

## Inputs

CELL NAME	FUNCTIONAL DESCRIPTION
IPI01LJ IPI11LJ IPI04LJ IPI14LJ	CMOS-Compatible Non-Inverting Input Buffer CMOS-Compatible Non-Inverting Clock Buffer TTL-Compatible Non-Inverting Input Buffer TTL-Compatible Non-Inverting Clock Buffer
IPI07LJ IPI09LJ	CMOS-Compatible Non-Inverting Input Buffer with Hysteresis TTL-Compatible Non-Inverting Input Buffer with Hysteresis

## Inverters/Buffers

CELL NAME	FUNCTIONAL DESCRIPTION
BU110LJ BU111LJ BU112LJ BU120LJ	Delay Buffer Inverting Delay Buffer Delay Buffer Delay Buffer, 2X Drive
BU130LJ BU221LJ BU222LJ BU261LJ	Delay Buffer, 3X Drive 3-State Buffer with Low Enable, 2X Drive 3-State Buffer with High Enable, 2X Drive 3-State Buffer with Low Enable, 6X Drive
BU262LJ IV101LJ IV110LJ IV120LJ	3-State Buffer with High Enable, 6X Drive Inverter, 10X Drive Inverter Inverter, 2X Drive
IV130LJ IV140LJ IV160LJ IV180LJ	Inverter, 3X Drive Inverter, 4X Drive Inverter, 6X Drive Inverter, 8X Drive
IV211LJ IV212LJ IV221LJ IV222LJ	Inverting 3-State Buffer with Low Enable Inverting 3-State Buffer with High Enable Inverting 3-State Buffer with Low Enable, 2X Drive Inverting 3-State Buffer with High Enable, 2X Drive
IV241LJ IV242LJ	Inverting 3-State Buffer with Low Enable, 4X Drive Inverting 3-State Buffer with High Enable, 4X Drive

## J-K Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
JKB20LJ JKB21LJ	J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive

## Latches

CELL NAME	FUNCTIONAL DESCRIPTION
LAB10LJ LAB20LJ LAH10LJ LAH11LJ	S-R Latch S-R Latch, 2X Drive D-Type Latch with High Enable D-Type Latch with High Enable
LAH20LJ LAH21LJ LAL20LJ LH110LJ	D-Type Latch with High Enable, 2X Drive D-Type Latch with High Enable, 2X Drive D-Type Latch with Low Enable 3-State Bus Holder

## Latches (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S259LJ S373LJ S375LJ	8-Bit Addressable Latch 8-Bit D-Type Latch with 3-State Outputs 4-Bit Bistable Latch



## Microprocessor Bit-Slice Elements

CELL NAME	FUNCTIONAL DESCRIPTION
M01MPLJ	4-Bit Microprocessor Slice (2901)
M02CGLJ	Look-Ahead Carry Generator (2902)
M04SSLJ	Status and Shift Controller (2904)
M10MCLJ	Microprogram Controller (2910)

## Multiplexers

CELL NAME	FUNCTIONAL DESCRIPTION
MU110LJ	2-Line to 1-Line Multiplexer with 3-State Outputs
MU111LJ	2-Line to 1-Line Multiplexer
MU210LJ	4-Line to 1-Line Multiplexer
MU211LJ	4-Line to 1-Line Multiplexer
MU310LJ	8-Line to 1-Line Multiplexer with 3-State Outputs
MU320LJ	8-Line to 1-Line Multiplexer, 2X Drive

## Multiplexers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S151LJ	8-Line to 1-Line Multiplexer
S153LJ	Dual 4-Line to 1-Line Multiplexer
S157LJ	Quad 2-Line to 1-Line Multiplexer
S158LJ	Quad 2-Line to 1-Line Inverting Multiplexer
S251LJ	8-Line to 1-Line Multiplexer with 3-State Outputs
S257ALJ	Quad 2-Line to 1-Line Multiplexer with 3-State Outputs
S258ALJ	Quad 2-Line to 1-Line Inverting Multiplexer with 3-State Outputs
S298LJ	Quad 2-Input Multiplexer with Negative-Edge-Triggered Register
S398LJ	Quad 2-Input Multiplexer with Complementary Output Register
S399LJ	Quad 2-Input Multiplexer with Edge-Triggered Register

## NAND Gates

CELL NAME	FUNCTIONAL DESCRIPTION
NA210LJ	2-Input NAND Gate
NA220LJ	2-Input NAND Gate, 2X Drive
NA230LJ	2-Input NAND Gate, 3X Drive
NA240LJ	2-Input NAND Gate, 4X Drive
NA260LJ	2-Input NAND Gate, 6X Drive
NA310LJ	3-Input NAND Gate
NA320LJ	3-Input NAND Gate, 2X Drive
NA330LJ	3-Input NAND Gate, 3X Drive
NA340LJ	3-Input NAND Gate, 4X Drive
NA410LJ	4-Input NAND Gate
NA420LJ	4-Input NAND Gate, 2X Drive
NA430LJ	4-Input NAND Gate, 3X Drive
NA510LJ	5-Input NAND Gate
NA520LJ	5-Input NAND Gate, 2X Drive
NA810LJ	8-Input NAND Gate
NA820LJ	8-Input NAND Gate, 2X Drive

## NOR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
NO210LJ NO220LJ NO230LJ NO240LJ	2-Input NOR Gate 2-Input NOR Gate, 2X Drive 2-Input NOR Gate, 3X Drive 2-Input NOR Gate, 4X Drive
NO310LJ NO320LJ NO330LJ NO410LJ	3-Input NOR Gate 3-Input NOR Gate, 2X Drive 3-Input NOR Gate, 3X Drive 4-Input NOR Gate
NO420LJ NO510LJ NO520LJ NO810LJ NO820LJ	4-Input NOR Gate, 2X Drive 5-Input NOR Gate 5-Input NOR Gate, 2X Drive 8-Input NOR Gate 8-Input NOR Gate, 2X Drive

## OR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
OR210LJ OR220LJ OR240LJ OR260LJ	2-Input OR Gate 2-Input OR Gate, 2X Drive 2-Input OR Gate, 4X Drive 2-Input OR Gate, 6X Drive
OR310LJ OR320LJ OR340LJ OR360LJ	3-Input OR Gate 3-Input OR Gate, 2X Drive 3-Input OR Gate, 4X Drive 3-Input OR Gate, 6X Drive
OR410LJ OR420LJ OR440LJ OR460LJ	4-Input OR Gate 4-Input OR Gate, 2X Drive 4-Input OR Gate, 4X Drive 4-Input OR Gate, 6X Drive
OR510LJ OR810LJ	5-Input OR Gate 8-Input OR Gate

## Oscillators

CELL NAME	FUNCTIONAL DESCRIPTION
OSI01LJ OSI02LJ OSI03LJ OSI04LJ	75-MHz (MAX) Crystal-Controlled Oscillator 55-MHz (MAX) Crystal-Controlled Oscillator 35-MHz (MAX) Crystal-Controlled Oscillator 20-MHz (MAX) Crystal-Controlled Oscillator

## Outputs

CELL NAME	FUNCTIONAL DESCRIPTION
OP#20LJ OP#40LJ OP#60LJ OP#00LJ	2-mA, Push-Pull Output Buffer 4-mA, Push-Pull Output Buffer 6-mA, Push-Pull Output Buffer 10-mA, Push-Pull Output Buffer
OP#A0LJ OP#B0LJ OP#E0LJ OP#G0LJ	16-mA, Push-Pull Output Buffer 16/24-mA, Push-Pull Output Buffer 16/48-mA, Push-Pull Output Buffer 16/64-mA, Push-Pull Output Buffer
OP#21LJ OP#41LJ OP#61LJ OP#01LJ	2-mA, Open-Drain Output Buffer 4-mA, Open-Drain Output Buffer 6-mA, Open-Drain Output Buffer 10-mA, Open-Drain Output Buffer

# Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

## Outputs (Continued)

CELL NAME	FUNCTIONAL DESCRIPTION
OP#A1LJ OP#B1LJ OP#E1LJ OP#G1LJ	16-mA, Open-Drain Output Buffer 24-mA, Open-Drain Output Buffer 48-mA, Open-Drain Output Buffer 64-mA, Open-Drain Output Buffer
OP#23LJ OP#43LJ OP#63LJ OP#03LJ	2-mA, 3-State Output Buffer 4-mA, 3-State Output Buffer 6-mA, 3-State Output Buffer 10-mA, 3-State Output Buffer
OP#A3LJ OP#B3LJ OP#E3LJ OP#G3LJ	16-mA, 3-State Output Buffer 16/24-mA, 3-State Output Buffer 16/48-mA, 3-State Output Buffer 16/64-mA, 3-State Output Buffer

## Parity Generator/Checker (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S280LJ	9-Bit Odd/Even Parity Generator/Checker

## Pulldown/Pullup Terminators

CELL NAME	FUNCTIONAL DESCRIPTION
PD095LJ PR005LJ PR095LJ PR250LJ PR400LJ	95- $\mu$ A, Pulldown Active Terminator 5- $\mu$ A, Pullup Active Terminator 95- $\mu$ A, Pullup Active Terminator 250- $\mu$ A, Pullup Active Terminator 5- $\mu$ A, Pullup Active Terminator

## Power-Up Clear One-Shot

CELL NAME	FUNCTIONAL DESCRIPTION
PUC00LJ	Power-Up Clear One-Shot

## Register Files

CELL NAME	FUNCTIONAL DESCRIPTION
RF400LJ RF401LJ RF402LJ RF600LJ RF601LJ RF602LJ	16-Word by 8-Bit 3-Port Register File with 3-State Outputs 16-Word by 8-Bit 4-Port Register File with 3-State Outputs 16-Word by 9-Bit 3-Port Register File with 3-State Outputs 64-Word by 8-Bit 3-Port Register File with 3-State Outputs 64-Word by 8-Bit 4-Port Register File with 3-State Outputs 64-Word by 9-Bit 3-Port Register File with 3-State Outputs

## Scan Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
TDC10LJ TDN10LJ TDN11LJ TP000LJ	D-Type Scan Flip-Flop with Clear D-Type Scan Flip-Flop without Preset/Clear 2-Phase Scan Register Latch without Preset/Clear 2-Phase Test Port Flip-Flop without Preset/Clear

## Shift Registers

CELL NAME	FUNCTIONAL DESCRIPTION
R2401LJ R2402LJ R2403LJ R2404LJ	4-Bit Shift Register with Serial Inputs, Asynchronous Clear 4-Bit Shift Register with Serial Inputs, Complementary Outputs 4-Bit Shift Register with Serial and Parallel Inputs 4-Bit Shift Register with Serial/Parallel Inputs, Complementary Outputs

\* Output buffers available with and without di/dt control. Output buffers with di/dt control reduce electromagnetic interference (EMI) and transient power requirements. Use of non-di/dt controlled buffers increases the number of power and ground pin requirements and should be limited to outputs with critical timing specifications.

### Shift Registers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S164LJ S165LJ S166LJ S194ALJ	8-Bit Parallel-Out Serial Shift Registers Parallel-Load 8-Bit Shift Registers Parallel-Load 8-Bit Shift Registers with Clear Bidirectional Universal Shift Registers
S195ALJ S299LJ S299XLJ S595LJ S598XLJ	4-Bit Parallel-Access Shift Registers 8-Bit Bidirectional Shift/Storage Registers 8-Bit Bidirectional Shift Registers 8-Bit Shift Register with 3-State Output Registers 8-Bit Shift Register with Input Registers

### Toggle Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
TAB20LJ TAC20LJ TAP20LJ	Toggle Flip-Flop with Preset, Clear, 2X Drive Toggle Flip-Flop with Clear, 2X Drive Toggle Flip-Flop with Preset, 2X Drive

### Tie-Off Gate

CELL NAME	FUNCTIONAL DESCRIPTION
TO010LJ	High-Level and Low-Level Tie-Off Gate

### Transceiver Registers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S651LJ S652LJ	8-Bit Bidirectional Register with Inverting Data Path 8-Bit Bidirectional Transceiver Registers

## 2- $\mu$ m SystemCell™ SERIES CMOS STANDARD CELLS\*

\*Technical data is contained in the 2- $\mu$ m CMOS StandardCell Databook (SRSD001).

### AND Gates

CELL NAME	FUNCTIONAL DESCRIPTION
AN210LH AN220LH AN240LH AN260LH	2-Input AND Gate 2-Input AND Gate, 2X Drive 2-Input AND Gate, 4X Drive 2-Input AND Gate, 6X Drive
AN310LH AN320LH AN340LH AN360LH	3-Input AND Gate 3-Input AND Gate, 2X Drive 3-Input AND Gate, 4X Drive 3-Input AND Gate, 6X Drive
AN410LH AN420LH AN440LH AN460LH	4-Input AND Gate 4-Input AND Gate, 2X Drive 4-Input AND Gate, 4X Drive 4-Input AND Gate, 6X Drive
AN510LH AN810LH	5-Input AND Gate 8-Input AND Gate

### AND-OR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
AO220LH AO221LH	AND-OR Gate, 2X Drive $Y = (A \cdot B) + (C \cdot D)$ AND-NOR Gate, 2X Drive $Y = (\overline{A \cdot B}) + (C \cdot D)$

### Arithmetic Operators (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S181LH S283LH	Arithmetic Logic Unit/Function Generator 4-Bit Binary Full Adder, Fast Carry

### Boolean Functions

CELL NAME	FUNCTIONAL DESCRIPTION
BF001LH BF002LH BF003LH BF004LH	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2 \cdot B3)}$
BF005LH BF006LH BF007LH BF008LH	AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2)}$ AND-NOR Gate $Y = \overline{A1 + A2 + (B1 \cdot B2 \cdot B3)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2)}$
BF009LH BF010LH BF011LH BF012LH	AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{A1 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2) + (C1 \cdot C2)}$ AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2) + (C1 \cdot C2 \cdot C3)}$
BF013LH BF014LH BF015LH BF016LH	AND-NOR Gate $Y = \overline{A1 \cdot A2 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + (B1 \cdot B2 \cdot B3) + (C1 \cdot C2 \cdot C3)}$ OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + C2)]}$ AND-OR-NAND Gate $Y = \overline{A1 + [(B1 + B2) \cdot (C1 + C2)]}$
BF017LH BF020LH BF022LH BF025LH	OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2)]}$
BF027LH BF028LH BF030LH BF034LH	OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot B2 \cdot (C1 + C2)]}$ OR-AND-NOR Gate $Y = \overline{A1 \cdot A2 \cdot A3 + [B1 \cdot (C1 + C2) \cdot (D1 + D2)]}$ AND-OR-AND-NOR Gate $Y = \overline{A1 + [B1 \cdot (C1 + (D1 \cdot D2))]}$ AND-OR-AND-NOR Gate $Y = \overline{(A1 \cdot A2) + [B1 \cdot (C1 + (D1 \cdot D2))]}$

1

Product Identification and Information

## Boolean Functions (Continued)

CELL NAME	FUNCTIONAL DESCRIPTION
BF035LH BF051LH BF052LH BF053LH	AND-OR-AND-NOR Gate $Y = \overline{A1 \cdot A2} + \{B1 \cdot [(C1 \cdot C2) + (D1 \cdot D2)]\}$ OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2}$ OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2 + B3}$ OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + B2}$
BF054LH BF055LH BF056LH BF057LH	OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + B2 + B3}$ OR-NAND Gate $Y = \overline{A1 + A2 + A3} \cdot \overline{B1 + B2 + B3}$ OR-NAND Gate $Y = \overline{A1 \cdot A2} \cdot \overline{B1 + B2}$ OR-NAND Gate $Y = \overline{A1 \cdot A2} \cdot \overline{B1 + B2 + B3}$
BF058LH BF059LH BF060LH BF062LH	OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2} \cdot \overline{C1 + C2}$ OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2} \cdot \overline{C1 + C2 + C3}$ OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2 + B3} \cdot \overline{C1 + C2 + C3}$ OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + B2} \cdot \overline{C1 + C2 + C3}$
BF063LH BF064LH BF065LH BF066LH	OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + B2 + B3} \cdot \overline{C1 + C2 + C3}$ OR-NAND Gate $Y = \overline{A1 + A2 + A3} \cdot \overline{B1 + B2 + B3} \cdot \overline{C1 + C2 + C3}$ AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + [C1 \cdot C2]}$ AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{[(B1 \cdot B2) + (C1 \cdot C2)]}$
BF067LH BF068LH BF069LH BF070LH	AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + B2 + [C1 \cdot C2]}$ AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + [C1 \cdot C2] + [D1 \cdot D2]}$ AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{[(B1 \cdot B2) + (C1 \cdot C2) + (D1 \cdot D2)]}$ AND-OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + [C1 \cdot C2]}$
BF071LH BF072LH BF075LH BF080LH	AND-OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{[(B1 \cdot B2) + (C1 \cdot C2)]}$ AND-OR-NAND Gate $Y = \overline{A1 + A2} \cdot \overline{B1 + B2 + [C1 \cdot C2]}$ AND-OR-NAND Gate $Y = \overline{A1 + A2 + A3} \cdot \overline{B1 + [C1 \cdot C2]}$ OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + [C1 \cdot (D1 + D2)]}$
BF081LH BF082LH BF088LH	OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 + [(C1 + C2) \cdot (D1 + D2)]}$ OR-AND-OR-NAND Gate $Y = \overline{A1} \cdot \overline{B1 \cdot B2 + [C1 \cdot (D1 + D2)]}$ OR-AND-OR-NAND Gate $Y = \overline{A1 + A2 + A3} \cdot \overline{B1 + [C1 \cdot (D1 + D2)]}$

## Buffers, 3-State (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S244LH S245LH	Octal Internal Bus Buffer with 3-State Outputs Octal Internal 3-State Bus Transceiver

## Comparators (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S085LH S686LH S688LH	4-Bit Magnitude Comparator 8-Bit Magnitude Comparator 8-Bit Identity Comparator

## Counter

CELL NAME	FUNCTIONAL DESCRIPTION
R2408LH	4-Bit Ripple Counter

## Counters (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S161ALH S163ALH S177LH S191LH	Synchronous 4-Bit Binary Counter with Clear Synchronous 4-Bit Binary Counter 1-Bit and 3-Bit Binary Ripple Counters Synchronous 4-Bit Up/Down Binary Counter with Down/Up Mode Control
S193LH S393LH S590LH S593XLH S669LH	Synchronous 4-Bit Up/Down Counter (Dual Clock with Clear) Dual 4-Bit Ripple Counters 8-Bit Binary Counter with 3-State Output Register 8-Bit Binary Counter with Input Register Synchronous 4-Bit Up/Down Binary Counter with Look-Ahead

## Decoders/Demultiplexers

CELL NAME	FUNCTIONAL DESCRIPTION
DE210LH	2-Line to 4-Line Decoder
DE212LH	2-Line to 4-Line Decoder with High Enable

## Decoders/Demultiplexers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S137LH	3-Line to 8-Line Decoder with Address Latches
S138LH	3-Line to 8-Line Decoder/Demultiplexer
S139LH	Dual 2-Line to 4-Line Decoder
S155LH	Dual 2-Line to 4-Line Decoder with Data, Enable

## D-Type Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
DFB20LH	D-Type Flip-Flop with Preset, Clear, 2X Drive
DFC20LH	D-Type Flip-Flop with Clear, 2X Drive
DFN20LH	D-Type Flip-Flop, 2X Drive
DFP20LH	D-Type Flip-Flop with Preset, 2X Drive
DFY20LH	D-Type Flip-Flop with Grounded-D, Preset, 2X Drive
DFZ20LH	D-Type Flip-Flop with Grounded-D Input, Preset, Clear, 2X Drive
DTB10LH	D-Type Flip-Flop with Preset, Clear, 1X Drive
DTC10LH	D-Type Flip-Flop with Clear, 1X Drive
DTN10LH	D-Type Flip-Flop, 1X Drive
DTP10LH	D-Type Flip-Flop with Preset, 1X Drive
R2405LH	4-Bit Flip-Flops with Asynchronous Clear
R2406LH	4-Bit Flip-Flops with Complementary Outputs
R2407LH	4-Bit Flip-Flops with 3-State Outputs

## D-Type Flip-Flops (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S173LH	4-Bit D-Type Register with 3-State Outputs
S174LH	Hex D-Type Flip-Flop
S175LH	Quad D-Type Flip-Flop with Complementary Outputs
S273LH	Octal D-Type Flip-Flop
S374LH	8-Bit D-Type Flip-Flop with 3-State Outputs

## Exclusive-OR/NOR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
EN210LH	2-Input Exclusive-NOR Gate
EX210LH	2-Input Exclusive-OR Gate
EX211LH	2-Input Exclusive-OR Gate
EX220LH	2-Input Exclusive-OR Gate, 2X Drive
EX221LH	2-Input Exclusive-OR Gate, 2X Drive
EX240LH	2-Input Exclusive-OR Gate, 4X Drive
EX241LH	2-Input Exclusive-OR Gate, 4X Drive

## Gated S-R/S-R Latches

CELL NAME	FUNCTIONAL DESCRIPTION
GMS10LH GM010LH GM110LH GM210LH	5-Input Gated S-R Latch with Separate Set 4-Input Gated S-R Latch 5-Input Gated S-R Latch with Separate Reset 6-Input Gated S-R Latch with Separate Set, Reset
GM310LH GM410LH GMS10LH GSS10LH	6-Input Gated S-R Latch 7-Input Gated S-R Latch with Separate Reset 8-Input Gated S-R Latch with Separate Set, Reset 5-Input Gated S-R Latch with Separate Set
GS010LH GS110LH GS210LH GS310LH	4-Input Gated S-R Latch 5-Input Gated S-R Latch with Separate Reset 6-Input Gated S-R Latch with Separate Set, Reset 6-Input Gated S-R Latch
GS410LH GS510LH	7-Input Gated S-R Latch with Separate Reset 8-Input Gated S-R Latch with Separate Set, Reset

## Inputs/Outputs, Bidirectionals

CELL NAME	FUNCTIONAL DESCRIPTION
IOFB4LH IOFB8LH IOFD8LH IOFE8LH	24-mA, 3-State I/O Buffer with TTL Input 24-mA, 3-State I/O Buffer with TTL Input 44-mA, 3-State I/O Buffer with Inverting TTL Input 48-mA, Open-Drain I/O Buffer with Inverting TTL Input, Hysteresis
IOF00LH IOF01LH IOF03LH IOF04LH	10-mA, 3-State I/O Buffer with Inverting CMOS Input 10-mA, 3-State I/O Buffer with CMOS Input 10-mA, 3-State I/O Buffer with Inverting TTL Input 10-mA, 3-State I/O Buffer with TTL Input
IOF21LH IOF24LH IOF40LH IOF41LH	2-mA, 3-State I/O Buffer with CMOS Input 2-mA, 3-State I/O Buffer with TTL Input 4-mA, 3-State I/O Buffer with Inverting CMOS Input 4-mA, 3-State I/O Buffer with CMOS Input
IOF43LH IOF44LH IOF47LH IOF48LH	4-mA, 3-State I/O Buffer with Inverting TTL Input 4-mA, 3-State I/O Buffer with TTL Input 4-mA, 3-State I/O Buffer with Inverting CMOS Input with Hysteresis 4-mA, 3-State I/O Buffer with Inverting TTL Input with Hysteresis
IOF64LH IOF66LH	6-mA, 3-State I/O Buffer with TTL Input 6-mA, 3-State I/O Buffer with Inverting CMOS Input with Hysteresis

## Inputs

CELL NAME	FUNCTIONAL DESCRIPTION
IPF00LH IPF01LH IPF02LH IPF03LH	CMOS-Compatible Inverting Input Buffer CMOS-Compatible Input Buffer CMOS-Compatible Inverting Input Buffer with Pullup Tap TTL-Compatible Inverting Input Buffer
IPF04LH IPF05LH IPF06LH IPF08LH	TTL-Compatible Input Buffer TTL-Compatible Inverting Input Buffer with Pullup Tap CMOS Inverting Input Buffer with Hysteresis TTL-Compatible Inverting Input Buffer with Hysteresis, Pullup Tap
IPF10LH IPF12LH IPF13LH	TTL-Compatible Input Buffer with Hysteresis, Pullup Tap TTL-Compatible Input Buffer TTL-Compatible Inverting Input Buffer with Pullup Tap



**Inverters/Buffers**

CELL NAME	FUNCTIONAL DESCRIPTION
BU110LH BU111LH BU112LH BU120LH	Delay Buffer Inverting Delay Buffer Delay Buffer Delay Buffer, 2X Drive
BU130LH BU221LH BU222LH BU261LH	Delay Buffer, 3X Drive 3-State Buffer with Low Enable, 2X Drive 3-State Buffer with High Enable, 2X Drive 3-State Buffer with Low Enable, 6X Drive
BU262LH IV101LH IV110LH IV120LH	3-State Buffer with High Enable, 6X Drive Inverter, 10X Drive Inverter Inverter, 2X Drive
IV130LH IV140LH IV160LH IV180LH	Inverter, 3X Drive Inverter, 4X Drive Inverter, 6X Drive Inverter, 8X Drive
IV211LH IV212LH IV221LH IV222LH	Inverting 3-State Buffer with Low Enable Inverting 3-State Buffer with High Enable Inverting 3-State Buffer with Low Enable, 2X Drive Inverting 3-State Buffer with High Enable, 2X Drive
IV241LH IV242LH	Inverting 3-State Buffer with Low Enable, 4X Drive Inverting 3-State Buffer with High Enable, 4X Drive

**J-K Flip-Flops**

CELL NAME	FUNCTIONAL DESCRIPTION
JKB20LH JKB21LH	J-K Positive-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive J-K Negative-Edge-Triggered Flip-Flop with Preset, Clear, 2X Drive

**Latches**

CELL NAME	FUNCTIONAL DESCRIPTION
LAB10LH LAB20LH LAH10LH LAH11LH	S-R Latch S-R Latch, 2X Drive D-Type Latch with High Enable D-Type Latch with High Enable
LAH20LH LAH21LH LAL20LH LH110LH	D-Type Latch with High Enable, 2X Drive D-Type Latch with High Enable, 2X Drive D-Type Latch with Low Enable 3-State Bus Holder

**Latches (Software Macros)**

CELL NAME	FUNCTIONAL DESCRIPTION
S259LH S373LH S375LH	8-Bit Addressable Latch 8-Bit D-Type Latch with 3-State Outputs 4-Bit Bistable Latch

**Multiplexers**

CELL NAME	FUNCTIONAL DESCRIPTION
MU110LH MU111LH MU210LH MU211LH	2-Line to 1-Line Multiplexer with 3-State Output 2-Line to 1-Line Multiplexer 4-Line to 1-Line Multiplexer 4-Line to 1-Line Multiplexer
MU310LH MU320LH	8-Line to 1-Line Multiplexer with 3-State Output 8-Line to 1-Line Multiplexer, 2X Drive

## Multiplexers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S151LH S153LH S157LH S158LH	8-Line to 1-Line Multiplexer Dual 4-Line to 1-Line Multiplexer Quadruple 2-Line to 1-Line Multiplexer Quad 2-Line to 1-Line Inverting Multiplexer
S251LH S257ALH S258ALH S298LH	8-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Multiplexer with 3-State Outputs Quad 2-Line to 1-Line Inverting Multiplexer with 3-State Outputs Quad 2-Input Multiplexer with Negative-Edge-Triggered Register
S398LH S399LH	Quad 2-Input Multiplexer with Complementary Output Register Quad 2-Input Multiplexer with Edge-Triggered Register

## NAND Gates

CELL NAME	FUNCTIONAL DESCRIPTION
NA210LH NA220LH NA230LH NA240LH	2-Input NAND Gate 2-Input NAND Gate, 2X Drive 2-Input NAND Gate, 3X Drive 2-Input NAND Gate, 4X Drive
NA260LH NA310LH NA320LH NA330LH	2-Input NAND Gate, 6X Drive 3-Input NAND Gate 3-Input NAND Gate, 2X Drive 3-Input NAND Gate, 3X Drive
NA340LH NA410LH NA420LH NA430LH	3-Input NAND Gate, 4X Drive 4-Input NAND Gate 4-Input NAND Gate, 2X Drive 4-Input NAND Gate, 3X Drive
NA510LH NA520LH NA810LH NA820LH	5-Input NAND Gate 5-Input NAND Gate, 2X Drive 8-Input NAND Gate 8-Input NAND Gate, 2X Drive

## NOR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
NO210LH NO220LH NO230LH NO240LH	2-Input NOR Gate 2-Input NOR Gate, 2X Drive 2-Input NOR Gate, 3X Drive 2-Input NOR Gate, 4X Drive
NO310LH NO320LH NO330LH NO410LH	3-Input NOR Gate 3-Input NOR Gate, 2X Drive 3-Input NOR Gate, 3X Drive 4-Input NOR Gate
NO420LH NO510LH NO520LH NO810LH NO820LH	4-Input NOR Gate, 2X Drive 5-Input NOR Gate 5-Input NOR Gate, 2X Drive 8-Input NOR Gate 8-Input NOR Gate, 2X Drive

## One-Shot

CELL NAME	FUNCTIONAL DESCRIPTION
MVF00LH	Retriggerable Monostable Multivibrator

## OR Gates

CELL NAME	FUNCTIONAL DESCRIPTION
OR210LH OR220LH OR240LH OR260LH	2-Input OR Gate 2-Input OR Gate, 2X Drive 2-Input OR Gate, 4X Drive 2-Input OR Gate, 6X Drive
OR310LH OR320LH OR340LH OR360LH	3-Input OR Gate 3-Input OR Gate, 2X Drive 3-Input OR Gate, 4X Drive 3-Input OR Gate, 6X Drive
OR410LH OR420LH OR440LH OR460LH	4-Input OR Gate 4-Input OR Gate, 2X Drive 4-Input OR Gate, 4X Drive 4-Input OR Gate, 6X Drive
OR510LH OR810LH	5-Input OR Gate 8-Input OR Gate

## Outputs

CELL NAME	FUNCTIONAL DESCRIPTION
OPFB0LH OPFB3LH OPFD3LH OPFE1LH	24-mA, Totem-Pole Output Buffer 24-mA, 3-State Output Buffer with Low Enable 44-mA, 3-State Output Buffer with Low Enable 48-mA, Open-Drain Output Buffer
OPF00LH OPF01LH OPF03LH OPF20LH	10-mA, Totem-Pole Output Buffer 10-mA, Open-Drain Output Buffer 10-mA, 3-State Output Buffer with Low Enable 2-mA, Totem-Pole Output Buffer
OPF23LH OPF40LH OPF41LH OPF43LH	2-mA, 3-State Output Buffer with Low Enable 4-mA, Totem-Pole Output Buffer 4-mA, Open-Drain Output Buffer 4-mA, 3-State Output Buffer with Low Enable
OPF60LH OPF61LH OPF63LH	6-mA, Totem-Pole Output Buffer 6-mA, Open-Drain Output Buffer 6-mA, 3-State Output Buffer with Low Enable

## Oscillators

CELL NAME	FUNCTIONAL DESCRIPTION
OSE00LH OSE01LH OSE06LH OSE07LH OSF02LH	5-MHz (MAX) Crystal-Controlled Oscillator 100-kHz (MAX) RC Oscillator 800-kHz (MAX) Crystal-Controlled Oscillator 200-kHz (MAX) RC Oscillator 20-MHz (MAX) Crystal-Controlled Oscillator

## Parity Generator/Checker (Software Macro)

CELL NAME	FUNCTIONAL DESCRIPTION
S280LH	9-Bit Odd/Even Parity Generator/Checker

## Pulldown/Pullup Terminators

CELL NAME	FUNCTIONAL DESCRIPTION
PD095LH PR005LH PR095LH PR250LH PR400LH	95- $\mu$ A, Pulldown Active Terminator 5- $\mu$ A, Pullup Active Terminator 95- $\mu$ A, Pullup Active Terminator 250- $\mu$ A, Pullup Active Terminator 5- $\mu$ A, Pullup Active Terminator

## Power-Up Clear One-Shot

CELL NAME	FUNCTIONAL DESCRIPTION
PUC00LH	Power-Up Clear One-Shot

## RAMs

CELL NAME	FUNCTIONAL DESCRIPTION
RA408LH	16-Word by 8-Bit Static Read/Write RAM with 3-State Outputs
RA608LH	64-Word by 8-Bit Static Read/Write RAM with 3-State Outputs
RA708LH	128-Word by 8-Bit Static Read/Write RAM with 3-State Outputs
RA802LH	256-Word by 2-Bit Static Read/Write RAM with 3-State Outputs

## Register Files

CELL NAME	FUNCTIONAL DESCRIPTION
RF408LH	16-Word by 8-Bit 3-Port Register File

## Shift Registers

CELL NAME	FUNCTIONAL DESCRIPTION
R2401LH	4-Bit Shift Register with Serial In, Asynchronous Clear
R2402LH	4-Bit Shift Register with Serial In, Complementary Outputs
R2403LH	4-Bit Shift Register with Serial and Parallel Inputs
R2404LH	4-Bit Shift Register with Serial/Parallel Inputs, Complementary Outputs

## Shift Registers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S164LH	8-Bit Parallel-Out Serial Shift Registers
S165LH	Parallel-Load 8-Bit Shift Registers
S166LH	Parallel-Load 8-Bit Shift Registers with Clear
S194ALH	Bidirectional Universal Shift Registers
S195ALH	4-Bit Parallel-Access Shift Registers
S299LH	8-Bit Bidirectional Shift/Storage Registers
S299XLH	8-Bit Bidirectional Shift Registers
S595LH	8-Bit Shift Register with 3-State Output Registers
S598XLH	8-Bit Shift Register with Input Registers

## Toggle Flip-Flops

CELL NAME	FUNCTIONAL DESCRIPTION
TAB20LH	Toggle Flip-Flop with Preset, Clear, 2X Drive
TAC20LH	Toggle Flip-Flop with Clear, 2X Drive
TAP20LH	Toggle Flip-Flop with Preset, 2X Drive

## Tie-Off Gate

CELL NAME	FUNCTIONAL DESCRIPTION
TO010LH	High-Level and Low-Level Tie-Off Gate

---

## Transceiver Registers (Software Macros)

CELL NAME	FUNCTIONAL DESCRIPTION
S651LH S652LH	8-Bit Bidirectional Register with Inverting Data Path 8-Bit Bidirectional Transceiver Register

1

Product Identification and Information

---

# Catalog Products Functional Index

## USING THE FUNCTIONAL INDEX

The Catalog Products Functional Index — a key-word index that matches functions to the appropriate section and page within the Guide — is intended to aid those readers unfamiliar with specific TI products. As an example,

<b>Contents</b>	<b>Page</b>
<b>Display Drivers,</b>	
AC Plasma .....	6-8
Electroluminescent .....	6-6
LED .....	6-7
Plasma and Gas Discharge .....	6-8
Vacuum Fluorescent .....	6-7
<b>Display, Intelligent, Single-Digit LED</b> .....	8-7
<b>Drivers,</b>	
Hex .....	3-10
Open-Collector Outputs .....	3-10
3-State Outputs .....	3-12
MOS .....	3-15
Line (Digital Logic) .....	3-15
Line (Linear Circuits) .....	6-2
Multifunction Drivers .....	3-16
Display .....	6-6
Peripheral .....	6-9
General Purpose .....	6-9
Motor .....	6-10

## CATALOG PRODUCTS FUNCTIONAL INDEX

Functions	Page
<b>A/D Converter Peripherals</b> .....	7-15
<b>A/D Converters,</b>	
Single- and Dual-Slope .....	7-13
Successive Approximation .....	7-14
<b>Accumulators</b> .....	3-34
<b>Actuators,</b>	
General Purpose .....	6-9
Power .....	6-10
<b>Adders, Parallel Binary</b> .....	3-34
<b>Address Comparators</b> .....	3-33
<b>Amplifiers,</b>	
Differential Video .....	7-10
Logarithmic .....	7-2
MOS Memory Sense .....	6-11
Operational .....	7-2
<b>Analog</b>	
Interface for Digital Signal Processors .....	7-15
Multiplexers .....	7-15
Switches .....	7-15
<b>Application Processors</b>	
TMS320 Digital Signal Processor (DSP) Family .....	4-5
TMS340 Graphics Family .....	4-8
TMS380 Local Area Network (LAN) Chipset .....	4-20
TMS700 Family - 8-Bit Microcomputer Family .....	4-27
<b>Arithmetic Logic Units</b> .....	3-34
<b>Buffers,</b>	
Hex Inverters .....	3-9
Hex Noninverters .....	3-9
<b>Bus Transceivers</b> .....	3-15
<b>Bus Transceivers,</b>	
Open Collector Outputs .....	3-11
3-State Outputs .....	3-13
<b>Binary Adders, Parallel</b> .....	3-34
<b>Cache Address Comparator</b> .....	4-61
<b>CCD</b>	
Area Image Sensors .....	8-2
Linear Image Sensors .....	8-2
<b>Checkers, Parity</b> .....	3-33
<b>Codecs, PCM Interface</b> .....	9-3
<b>Combos, PCM Interface</b> .....	9-3
<b>Comparator, Cache Address</b> .....	4-61

<b>Functions</b>	<b>Page</b>
<b>Comparators</b>	
Address .....	3-33
Fuse Programmable .....	3-33
Other Identity .....	3-32
Voltage .....	7-11
4-Bit .....	3-32
8-Bit Identity .....	3-32
<b>Controllers,</b>	
Dynamic RAM .....	4-63
Memory/Microprocessor .....	3-31
Pulse Width Modulated (PWM) .....	7-19
Read-Write .....	7-10
<b>Converter, Switched Capacitor Voltage</b> .....	7-18
<b>Converters,</b>	
D/A .....	7-14
Frequency to Voltage .....	7-21
<b>Correction and Error Detection Circuits</b> .....	3-33
<b>Current Mirrors</b> .....	7-21
<b>Counters,</b>	
Asynchronous, Negative-Edge Triggered .....	3-26
Frequency Dividers .....	3-27
Rate Multipliers .....	3-27
Synchronous, Positive-Edge Triggered .....	3-25
8-Bit Binary with Registers .....	3-27
<b>Couplers, Opto,</b>	
Schmitt Trigger .....	8-6
Triac Drivers .....	8-6
<b>D/A Converters</b> .....	7-14
<b>Data Selectors</b> .....	3-28
<b>Data Sheets/Other Literature</b> .....	12-8
<b>Decoders</b> .....	3-30
<b>Demultiplexers</b> .....	3-30
<b>Descriptions</b>	
Package .....	11-2
Semiconductor Books .....	12-10
<b>Design Kits</b> .....	12-2
<b>Differential Video Amplifiers</b> .....	7-10
<b>Digital Loop</b> .....	3-31
<b>Digital Signal Processor Analog Interface</b> .....	7-15
<b>Digital Signal Processors (DSP) Family — (see TMS320)</b>	
<b>Display Decoders/Drivers,</b>	
Open-Collector .....	3-30
Open-Collector with Counters/Latches .....	3-31



Functions	Page
<b>Display Drivers,</b>	
AC Plasma .....	6-8
Electroluminescent .....	6-6
LED .....	6-7
Plasma and Gas Discharge .....	6-8
Vacuum Fluorescent .....	6-7
<b>Display, Intelligent, Single-Digit LED</b> .....	8-7
<b>Drivers,</b>	
Hex .....	3-10
Open-Collector Outputs .....	3-10
3-State Outputs .....	3-12
MOS .....	3-15
Line (Digital Logic) .....	3-15
Line (Linear Circuits) .....	6-2
Multifunction Drivers .....	3-16
Display .....	6-6
Peripheral .....	6-9
General Purpose .....	6-9
Motor .....	6-10
<b>Dynamic RAM Controllers</b> .....	4-63
<b>Electroluminescent Display Drivers</b> .....	6-6
<b>Encoders</b> .....	3-28
<b>Error Detection and Correction Circuits</b> .....	3-33
<b>Field Programmable Logic Arrays (ALS)</b> .....	3-37
<b>Filter ICs, Switched-Capacitors</b> .....	7-15
<b>Filters, PCM Interface</b> .....	9-3
<b>First-In First-Out Memories (FIFOs)</b> .....	10-9
<b>Flip-Flops,</b>	
Dual and Single .....	3-17
Quad and Hex .....	3-18
Octal, 9-Bit, and 10-Bit D-Type .....	3-18
<b>Frequency Dividers</b> .....	3-27
<b>Frequency-to-Voltage Converter</b> .....	7-21
<b>FSK Modems</b> .....	9-4
<b>Fuse Programmable Comparators</b> .....	3-33
<b>Gates,</b>	
Positive-AND .....	3-5
Positive-AND, Open-Collector Outputs .....	3-5
Positive-NAND .....	3-4
Positive-NAND, Open-Collector Outputs .....	3-5
Positive-OR .....	3-6
Positive-OR/NOR .....	3-7
Positive-NOR .....	3-6
AND-NOR .....	3-7
AND-NOR, Open-Collector Outputs .....	3-7
Exclusive OR/NOR .....	3-7

<b>Functions</b>	<b>Page</b>
Expandable .....	3-8
Multifunction, and Elements .....	3-8
<b>Generators,</b>	
Look-Ahead Carry .....	3-34
Parity .....	3-33
<b>Graphics Family — (see TMS340)</b>	
<b>Hall-Effect Products</b> .....	7-21
<b>High Performance</b>	
CMOS PAL Circuits .....	3-37
IMPACT Programmable Array Logic .....	3-37
PAL Circuits .....	3-36
VLSI Processors .....	4-31
<b>IBM 360/370 Circuits</b> .....	6-2
<b>IC Socket</b> .....	11-13
<b>IEEE 488 GBIP Circuits</b> .....	6-5
<b>IEEE 802.3 Circuits</b> .....	6-5
<b>Image Sensors and Support Functions</b> .....	8-2
<b>Infrared Emitters and Phototransistors</b> .....	8-7
<b>Intelligent Single-Digit LED Displays</b> .....	8-7
<b>Latches,</b>	
Quad, 2-State Outputs .....	3-20
D-Type Octal, 9-Bit and 10-Bit Read-Back .....	3-20
Octal, 9-Bit and 10-Bit .....	3-21
<b>LED Display Drivers</b> .....	6-7
<b>Line</b>	
Drivers .....	6-2
Receivers .....	6-3
Transceivers .....	6-5
<b>Local Area Network (LAN) Adapter Chipset — (see TMS380)</b>	
<b>Logarithm Amplifier</b> .....	6-10
<b>Look Ahead Carry Generator</b> .....	3-34
<b>Magnetic-Media Read and Write Circuits</b> .....	7-10
<b>Memory,</b>	
Bipolar .....	10-9
MOS .....	10-2
<b>Memory/Microprocessor Controllers</b> .....	3-31
<b>Microcomputer Family, 8-Bit — (see TMS7000)</b>	
<b>Modem, Bell 202/V.23</b> .....	9-4
<b>MOS</b>	
EPROMs .....	10-2
PROMs .....	10-3
DRAMs .....	10-4
Dynamic RAM Modules .....	10-5
EPROM Cross Reference Guide .....	10-6
<b>MOS-Memory Sense Amplifiers</b> .....	6-11
<b>Motor Drivers</b> .....	6-10

Functions	Page
<b>Multiplexers</b> .....	3-28
<b>Multiplexers, Analog</b> .....	7-15
<b>Open-Collector Display Decoders/Drivers</b> .....	3-30
<b>Open-Collector Display Decoders/Drivers with Counters/Latches</b> .....	3-30
<b>Operational Amplifiers,</b>	
Internally Compensated, Single .....	7-3
Internally Compensated, Dual .....	7-5
Internally Compensated, Quad .....	7-8
Noncompensated, Single .....	7-2
<b>Optocouplers</b> .....	8-4
<b>Optoisolators</b> .....	8-4
<b>Order Forms</b>	
Data Sheets/Other Literature .....	12-10
Semiconductor Books .....	12-15
<b>Oscillators, Voltage-Controlled</b> .....	3-31
<b>Over-Voltage Protection Circuits</b> .....	7-16
<b>Package Descriptions</b> .....	11-2
<b>Parity Generators/Checkers</b> .....	3-33
<b>Peripheral Drivers</b> .....	6-9
<b>Phototransistors, Infrared</b> .....	8-7
<b>Plasma and Gas Discharge Display Drivers</b> .....	6-8
<b>Power Supply Supervisors,</b>	
Over Voltage .....	7-16
Under Voltage .....	7-16
<b>Processors, Application — (see Application Processors)</b>	
<b>Processors, High Performance VLSI</b> .....	4-31
8-Bit-Slice Processor Family .....	4-31
32-Bit Family .....	4-42
<b>Programmable Logic Arrays</b> .....	3-35
Standard High-Speed PAL Circuits (ALS) .....	3-35
High Performance PAL Circuits (ALS) .....	3-36
High Performance CMOS PAL Circuits .....	3-37
High Performance IMPACT Programmable Array Logic .....	3-37
Field Programmable Logic Arrays (ALS) .....	3-37
<b>Programmable Tone/Noise Generator</b> .....	7-22
<b>Protection Circuits</b> .....	7-16
<b>PWM Controllers</b> .....	7-19
<b>Rate Multipliers</b> .....	3-27
<b>Read-and-Write Controller, Magnetic Media</b> .....	7-10
<b>Receivers, Line</b> .....	6-3
<b>Register Files</b> .....	3-23
<b>Registers,</b>	
Shift .....	3-22
Shift, with Latches .....	3-23
Sign-Protected .....	3-23
Other .....	3-24

Functions	Page
<b>Regulators/References, Shunt Voltage</b> .....	7-16
<b>Regulators, Voltage,</b>	
Adjustable Series Pass .....	7-16
Negative .....	7-18
Positive .....	7-17
Shunt .....	7-16
Switched .....	7-18
<b>Relay Drivers</b> .....	6-10
<b>ROM, Speech,</b>	
128K .....	9-6
256K .....	9-6
<b>RS-232-C Circuits</b> .....	6-2
<b>RS-422-A Circuits</b> .....	6-2
<b>RS-423-A Circuits</b> .....	6-2
<b>RS-485 Circuits</b> .....	6-2
<b>Semiconductor Literature</b> .....	12-7
<b>Seminars, Technical</b> .....	12-4
<b>Shift Registers</b> .....	3-22
<b>Shift Registers with Latches</b> .....	3-22
<b>Shifter</b> .....	3-30
<b>Shunt Voltage Regulators/References</b> .....	7-16
<b>Sockets, IC</b> .....	11-13
<b>Sonar Ranging Circuits</b> .....	7-22
<b>Sonar Ranging Modules</b> .....	7-22
<b>Solenoid Drivers</b> .....	6-9
<b>Speech ROMs</b> .....	9-6
<b>Standard High-Speed PAL Circuits (ALS)</b> .....	3-35
<b>Subscriber Line Control Circuits (SLCC)</b> .....	9-5
<b>Subscriber Products</b> .....	9-5
<b>Surface Mount Technology</b> .....	11-25
<b>Switch-Mode Power-Supply Circuits</b> .....	7-16
<b>Switched-Capacitor Filter ICs</b> .....	7-15
<b>Switching and Transmission Products</b> .....	9-2
<b>Switching Voltage Regulators</b> .....	7-16
<b>Synthesizer, Voice</b> .....	9-6
<b>Technical Workshops</b> .....	12-4
<b>Telecommunications Circuits</b> .....	9-1
<b>Timers</b> .....	7-20
<b>TMS320 Digital Signal Processor (DSP) Family,</b>	4-5
First Generation Processors .....	4-5
Second Generation Processors .....	4-5
Third Generation Processors .....	4-5
Development Support .....	4-6

Functions	Page
<b>TMS340 Graphics Family,</b> .....	4-8
Graphics System Processor .....	4-9
Video System Controller .....	4-11
Color Palette .....	4-13
Family Hardware and Software Support .....	4-14
Development Software .....	4-18
<b>TMS380 LAN Adapter Chipset,</b> .....	4-20
System Interface .....	4-21
Communications Processor .....	4-21
Protocol Handler .....	4-21
Ring Interfaces .....	4-21
ASIC-LAN Tool Kit .....	4-23
IEEE 820.2 Logical Link Control .....	4-23
Customer Support .....	4-24
<b>TMS7000 Family — 8-Bit Microcomputers,</b> .....	4-27
TMS7000 Family .....	4-28
Development Systems .....	4-28
Prototyping Devices .....	4-29
Piggyback Devices .....	4-30
<b>Transceivers,</b>	
Line .....	6-5
Bus .....	3-15
Bus, Open Collector .....	3-11
Bus, 3-State Outputs .....	3-13
<b>Under-Voltage Protection Circuits</b> .....	7-16
<b>Vacuum Fluorescent Display Driver</b> .....	6-7
<b>VLSI, High Performance</b>	
8-Bit-Slice Processor Family .....	4-31
32-Bit Family .....	4-42
<b>Voice Synthesizers</b> .....	9-6
<b>Voltage Comparators</b> .....	7-11
<b>Voltage-Controlled Oscillators</b> .....	3-31
<b>Voltage Regulators,</b>	
Adjustable Series Pass .....	7-16
Positive .....	7-17
Negative .....	7-18
<b>Voltage Regulators/References, Shunt</b> .....	7-16
<b>Workshops, Technical</b> .....	12-4
<b>4-Bit Comparators</b> .....	3-32
<b>8-Bit Identity Comparators</b> .....	3-32

---

# APPLICATION SPECIFIC INTEGRATED CIRCUITS (ASIC)

The use of Application Specific Integrated Circuits (ASIC) provides a means of achieving increased levels of system performance, integration, reliability and design security.

TI's ASIC product offering ranges from 10 ns programmable array logic (PAL)<sup>®</sup> devices (Section 3) based on TI's 1.5- $\mu$ m bipolar IMPACT-X<sup>™</sup> process to a high performance 1- $\mu$ m gate array and standard cell family fabricated in TI's double-level-metal, EPIC<sup>™</sup> CMOS process technology.

The TGC100 Series gate array family comprises three arrays in densities up to 8k gates with a typical two-week prototype turnaround time for logic consolidation applications; the TSC500 Series standard cell family offers the ultimate in performance and functionality with an expanding library of LSI/VLSI building blocks and a wide variety of packaging options for system consolidation applications. TI's 2- $\mu$ m SystemCell<sup>™</sup> Series provides a cost-effective solution for applications where the speed and density offered by the TSC500 Series are not primary considerations.

Texas Instruments offers a full range of design services and technical support to assist in the completion of an ASIC design. The reader is urged to review the information provided in the 1988 Master Selection Guide to become more familiar with TI's ASIC capabilities, and to contact the nearest TI field sales office or TI ASIC distributor for additional technical information. Names and addresses are listed at the back of the Guide.

<b>Contents</b>	<b>Page</b>
Gate Arrays .....	2-2
Standard Cells .....	2-3
Technical Documentation .....	2-5
Design Services .....	2-5
Design Tools .....	2-6
Design Workshops .....	2-6

# GATE ARRAY PRODUCT FAMILY

## 1- $\mu$ m TGC100 SERIES CMOS GATE ARRAYS

The 1- $\mu$ m TGC100 Series consists of three arrays ranging in density from 3200 to 8896 gates with I/O's from 84 to 142. Fabricated in TI's 1- $\mu$ m EPIC™ double-level-metal CMOS process, this family offers typical propagation delays of 500 ps (two-input NAND gate, fan-out = 2) and a maximum toggle rate of 208 MHz.

Specified to operate over the commercial temperature range (0° C to 70° C), the initial release of the TGC100 Series library contains 174 macros including SSI, MSI, I/O, Boolean and 'soft macro' functions. Macro libraries are currently supported on Daisy and Mentor engineering workstations.

A predefined selection of industry standard packaging options ranging from 28-pin dual-in-line packages (DIP) to 84-pin plastic leaded chip carriers (PLCC) is available for TGC100 Series designs. Standard TGC100 Series designs typically provide a two-week prototype cycle time (from customer approval of post-layout simulation to shipment of five ceramic-packaged prototypes) for critical time-to-market logic consolidation applications.

Contact the nearest TI Field Sales Office or ASIC Distributor for a copy of the TGC100 Series Family Data Sheet (SRGS006) and the TGC100 Series Product Bulletin (SRYT048).

**TGC100 SERIES GATE ARRAY MACRO LIBRARY SUMMARY**

Function	Quantity	Function	Quantity
Basic Gates	55	I/O Buffers	36
Arithmetic Operators	4	Latches	7
Comparators	3	Multiplexers	5
Counters	4	Output Buffers	24
Decoders/Demultiplexers	2	Registers	2
Flip-Flops	20	Shift Registers	3
Input buffers	8	Tie-Off	1

**TGC100 SERIES PRODUCT SUMMARY AND PACKAGING**

Gate Array	Total Gate Count	Usable Gates (90%)	Max. I/Os	28 PLCC	28 DIP	40 DIP	44 PLCC	68 PLCC	84 PLCC
TGC103	3200	2880	84	•	•	•	•	•	•
TGC105	5376	4838	118		•	•	•	•	•
TGC108	8896	8006	142			•	•	•	•

## Military Applications

TI also offers gate array designs processed in compliance with MIL-STD-883, Method 5004/5005 or Method 5010. Production facilities are fully DESC and JAN certified. Refer to the Military Products Designer's Reference Guide (SGYZ001B) for more information regarding TI Military ASIC.

2

Application Specific Integrated Circuits (ASIC)

---

## STANDARD CELL PRODUCT FAMILY

### 1- $\mu\text{m}$ TSC500 SERIES CMOS STANDARD CELLS

The TSC500 Series, based on TI's proprietary 1- $\mu\text{m}$  EPIC™ double-level-metal CMOS technology, provides for significant increases in system integration and performance. Typical propagation delay for the smallest version (lowest power, lowest speed) of a two-input NAND gate is 490 ps (fan – out = 2) with a maximum toggle rate of 208 MHz.

The initial release of TI's third-generation standard cell family contains more than 330 cell types including SSI, MSI, I/O, and Boolean functions. TI's library of MegaModule™ and CompilerCell™ functions, currently in development, will support the integration of system-level LSI/VLSI building blocks into a design and eliminate the necessity to design high-level functions at the gate-level.

MegaModule functions, scheduled for release during 4Q87, are a family of FIFO's and Register Files. Functions, including 29XX Bit Slice (2901 4-Bit Slice, 2902 Carry Look-Ahead, 2904 Status/Shift Controller, 2910 Microprogram Controller) and PC Peripheral (8237A DMA Controller, 8254 Internal Timer, 8259A Interrupt Controller, 82284 Clock Generator/Driver, 82288 Bus Controller) are scheduled for future release.

CompilerCell functions such as RAM, ROM and PLA, generated automatically on an engineering workstation utilizing user-specified dimensional parameters, will be available for 1- $\mu\text{m}$  designs.

Contact the nearest TI field sales office for a copy of the TSC500 Series Family Data Sheet (SRSS033) and TSC500 Series Product Bulletin (SRYT03A).

### 2- $\mu\text{m}$ SYSTEMCELL SERIES CMOS STANDARD CELLS

TI's SystemCell Series currently comprises more than 290 cell types including SSI, MSI, I/O, Boolean and extended functions such as RAM, ROM and PLA. Using 2- $\mu\text{m}$  (1.6- $\mu\text{m}$  effective gate length) double-level-metal, twin-well, silicon-gate CMOS technology, SystemCell functions allow for a large variety of circuit implementations at a reduced cost. Typical gate propagation delay for the smallest two-input NAND gate is 1.2 ns (fan – out = 2) with a maximum toggle rate of 69 MHz.

Refer to the order form located at the back of this Guide to obtain a copy of the 2- $\mu\text{m}$  SystemCell Data Book (SRSD001).



STANDARD CELL FUNCTION SUMMARY		
Function	TSC500 Series	SystemCell Series
Basic Gates	117	117
Arithmetic Operators	3	3
Comparators	3	3
Counters	10	10
Decoder/Demultiplexers	6	6
FIFOs	3	-
Flip-Flops	27	23
Input Buffers	6	11
Inverters	24	24
I/O Buffers	32	18
I/O Terminators	5	5
Latches	25	25
Multiplexers	16	16
One-shots	-	1
Oscillators	4	5
Output Buffers	24	14
Power-Up Clear	1	1
RAM (Hard Macros)	-	4
Registers	2	2
Register Files	6	1
Shift Registers	13	13
Tie-offs	1	1
29XX Bit Slice	4	-

STANDARD CELL PACKAGE OPTIONS																			
Type	Number of Pins																		
	8	16	20	24	28	40	44	48	64	68	84	100	120	132	144	164	180	208	
DIP	•	•	•	•	•	•		•											
SOIC		•	•		•														
LCC					•		•			•	•								
QFP											•	•		•					
PGA												•	•	•	•			•	•

### Military Applications

TI also offers standard cell designs processed in compliance with MIL-STD-883, Method 5004/5005 or Method 5010. Production facilities are fully DESC and JAN certified. Refer to the Military Products Designer's Reference Guide (SGYZ001B) for more information regarding TI Military ASIC.

---

## TECHNICAL DOCUMENTATION

Comprehensive design kits for the TGC100 Series gate arrays and the TSC500 Series standard cells are currently in development. Scheduled to be available during 1Q88, these kits — to be provided in a 3-ring binder format — will initially include a design manual, two-volume data manual, software utilities manual, and EWS specific library.

Contact the nearest field sales office for more information regarding the availability of these design kits.

The reader should refer to the “ASIC Alphanumeric Index” in Section 1 and to the order forms at the back of the Guide for additional information on available technical documentation.

## DESIGN SERVICES

Texas Instruments has an established worldwide network of Regional Technology Centers (RTC) staffed by design professionals with direct application experience. Design engineers are available to assist in the evaluation of customer product design — from concept to prototype to production. The ASIC Design Center within each RTC is fully equipped with hardware/software design tools to support design analysis and optimization, schematic capture, simulation and layout. Access to these design tools within many design centers is provided to customers 24-hours a day.

A full range of design services is also available through TI's authorized ASIC distributors — Wyle Laboratories and Arrow Electronics. Staffed by experienced ASIC designers, the distributor design centers provide local access to additional resources. Additional distributor services include workstation leasing, flexible credit terms, and inventory buffer capability.

Contact the nearest RTC or ASIC distributor for additional information. Names and addresses are listed at the back of the Guide.

---

## DESIGN TOOLS

TI ASIC libraries are supported on several popular engineering workstations. Design support software utilities are provided to supplement the graphic symbol, logic and simulation models, delay and interconnect models contained in each library. These software utilities assure that the final design database is fully verified and compatible with TI's IC design tools and test equipment.

Refer to the table below for a summary of workstations supporting TI ASIC libraries. Contact the nearest TI field sales office for the most up-to-date information regarding EWS library support.

### WORKSTATIONS SUPPORTING TI ASIC LIBRARIES

Product	Family	Workstations			
		Daisy	Mentor	Valid	H-P
Gate Arrays	TGC100 Series	•	•		
Standard Cells	TSC500 Series	•	•		
	SystemCell Series	•	•	•	•

## DESIGN WORKSHOPS

Designers initially engaging with TI are automatically enrolled in a gate array (ASICGA1) or standard cell (ASICSC1) design workshop to ensure the successful execution of an ASIC design. These one-day workshops, held at the customer site or at one of TI's Regional Technology Centers (RTC), are intended for designers experienced in logic design and familiar with basic engineering workstation operation. The workshops are instructed by experienced ASIC design engineers, and focus on design practices and techniques necessary to ensure design compatibility with TI's internal design automation tools and test equipment.

Instruction is provided in the following areas:

- ASIC technology options
- selection of TI library functions to meet performance/cost goals
- the effect of design partitioning/package selection on unit/system cost
- designing for testability
- recommended ASIC design practices
- TI ASIC design flow
- use of TI EWS design support software utility programs
- EWS design capture procedures to generate a TI netlist
- test pattern generation including format requirements
- TI ASIC test systems capabilities
- TI design execution requirements
- prototype test procedures
- design submission package preparation
- post layout simulation

Readers should contact the nearest TI Field Sales Office or RTC for more information concerning either workshop. Specific addresses and telephone numbers are listed at the back of this Guide.

---

# DIGITAL LOGIC PRODUCTS

TI's digital logic family offers everything from standard bipolar devices to the latest VLSI products. Thanks to TI-proprietary technologies such as IMPACT™ and EPIC™, many TI logic devices feature substantially faster operating speeds and power savings beyond comparable products.

For instance, IMPACT (Implanted Advanced Composed Technology) creates 2- $\mu\text{m}$  features, producing dramatic decreases in device size, length of signal paths and sidewall capacitance. This technology and a derivative, IMPACT-X (which utilizes trench isolation), have made it possible to create high-performance products such as: TI's 8-bit 'AS888 processor slice and 32-bit processor (see Section 4, subsection on High Performance VLSI Processors); 10-ns programmable array logic (PAL®) devices; and memory management products (see Section 4, subsection on Cache Tags, and DRAM controllers). The 1- $\mu\text{m}$  EPIC™ process, Enhanced Performance Implanted CMOS, is bringing an Advanced CMOS Logic (ACL) family to the forefront of the industry. Three times faster than its standard counterparts, the ACL family includes more than 100 of the most popular 54/74 logic functions.

Along with these premiere products, TI's digital family now includes new BiCMOS bus interface devices (SN74BCT') which combine the best of bipolar and CMOS technologies. These devices can reduce system power consumption as much as 25% while maintaining advanced speed and output drive. All TI digital logic products have passed a rigorous quality and reliability program, making them prime candidates for ship-to-stock and just-in-time programs. The reader is urged to utilize the 1988 Master Selection Guide as a quick reference to TI's entire digital logic family.

The reader should refer to the 'Alphanumeric Index' and the 'Functional Index' in Section I and to the order forms at the back of the Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
Gates .....	3-4
Positive-NAND Gates .....	3-4
Positive-NAND Gates with Open-Collector Outputs .....	3-5
Positive-AND Gates with Open-Collector Outputs .....	3-5
Positive-AND Gates .....	3-5
Positive-OR Gates .....	3-6
Positive-NOR Gates .....	3-6
Positive-OR/NOR Gates .....	3-7
Exclusive OR/NOR Gates .....	3-7
AND-NOR Gates .....	3-7
AND-NOR Gates with Open-Collector Outputs .....	3-7
Expandable Gates .....	3-8
Multifunction Gates and Elements .....	3-8
Delay Elements .....	3-8

---

**Contents****Page**

Inverters/Noninverting Buffers .....	3-9
Hex Inverters/Noninverters .....	3-9
Drivers and Bus Transceivers .....	3-10
Hex Drivers .....	3-10
Drivers with Open-Collector Outputs .....	3-10
Bus Transceivers with Open Collector Outputs .....	3-11
Drivers with 3-State Outputs .....	3-12
Bus Transceivers with 3-State Outputs .....	3-13
Line Drivers/Bus Transceivers/MOS Drivers .....	3-15
Line Drivers .....	3-15
50-Ohm/75-Ohm Line Drivers .....	3-16
Multifunction Drivers .....	3-16
Flip-Flops .....	3-17
Dual and Single Flip-Flops .....	3-17
Quad and Hex Flip-Flops .....	3-18
Octal, 9-Bit, and 10-Bit D-Type Flip-Flops .....	3-18
Latches and Multivibrators .....	3-20
Quad Latches with 2-State Outputs .....	3-20
Monostable Multivibrators .....	3-20
D-Type Octal, 9-Bit and 10-Bit Read-Back Latches .....	3-20
Octal, 9-Bit and 10-Bit Latches .....	3-21
Registers .....	3-22
Shift Registers .....	3-22
Shift Register with Latches .....	3-23
Sign-Protected Registers .....	3-23
Register Files .....	3-23
Other Registers .....	3-24
Counters .....	3-25
Synchronous Counter — Positive-Edge Triggered .....	3-25
Asynchronous Counters (Ripple Clock) — Negative-Edge Triggered .....	3-26
8-Bit Binary Counters with Registers .....	3-27
Frequency Dividers, Rate Multipliers .....	3-27
Decoders, Encoders, Data Selectors/Multiplexers and Shifters .....	3-28
Encoders/Data Selectors/Multiplexers .....	3-28
Decoders/Demultiplexers .....	3-30
Shifters .....	3-30
Open-Collector Display Decoders/Drivers .....	3-30
Open-Collector Display Decoders/Drivers with Counters/Latch .....	3-31
Voltage-Controlled Oscillators .....	3-31
Memory/Microprocessor Controllers .....	3-31
Digital Loops .....	3-31

---

**Contents****Page**

Comparators and Error Detection Circuits .....	3-32
4-Bit Comparators .....	3-32
8-Bit Identity Comparators .....	3-32
Other Identity Comparators .....	3-32
Address Comparators .....	3-33
Parity Generators/Checkers, Error Detection and Correction Circuits .....	3-33
Fuse Programmable Comparators .....	3-33
Arithmetic Circuits and Processor Elements .....	3-34
Parallel Binary Adders .....	3-34
Accumulator, Arithmetic Logic Units, Look-Ahead Carry Generators .....	3-34
Programmable Logic Arrays .....	3-35
Standard High-Speed PAL® Circuits (ALS) .....	3-35
High Performance PAL® Circuits (ALS) .....	3-36
High Performance CMOS PAL® Circuits .....	3-37
High Performance IMPACT™ Programmable Array Logic .....	3-37
Field Programmable Logic Arrays (ALS) .....	3-37
VLSI 8-Bit-Slice Processor Family (see Section 4, Processors and Controllers) .....	3-38
VLSI 32-Bit Family (see Section 4, Processors and Controllers) .....	3-39
Ordering Instructions .....	3-40



# GATES

## Positive-NAND Gates

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT	
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT		
8-Input	'30	•	•	•								SDLD001
					A	•						SDAD001B
								•	•			SCLD001A
								•				SDFD001
										•	•	SCAD001
13-Input	'133				•						SDAD001B	
				•				•			SCLD001A	
12-Input	'134			•							SDLD001	
Dual 2-Input	'8003				•						SDAD001B	
Dual 4-Input	'13	•	•								SDLD001	
		•	•	•							SDLD001	
					A	•						SDAD001B
								•	•			SCLD001A
	'40					A						SDFD001
		•	•	•								SDAD001B
					A							SDLD001
'1020				A						SDAD001B		
'11020								•	•	SCAD001		
Triple 3-Input	'10	•	•	•							SDLD001	
					•	•					SDAD001B	
								•	•			SCLD001A
								•				SDFD001
	'1010				A						SDAD001B	
'11010								•	•	SCAD001		
Quad 2-Input	'00				A	•					SDAD001B	
		•	•	•							SDLD001	
								•	•			SCLD001A
								•				SDFD001
	'26	•	•								SDLD001	
		•	•	•							SDLD001	
	'37				A						SDAD001B	
		•	•	•							SDLD001	
	'38				A						SDAD001B	
		•	•	•							SDLD001	
	'39	•									SDLD001	
'132								•			SCLD001A	
	•	•	•							SDLD001		
				A	A						SDAD001B	
								•	•		SCAD001	
Hex 2-Input	'804				A	B					SDAD001B	
								•			SCLD001A	
	'1804				A	•					SDAD001B	

### How to read Digital Logic Products selection tables:

The following symbols are common to all selection tables on pages 3-4 to 3-34.

- = Product available in technology indicated
- ▲ = New Product planned in technology indicated
- A = "A" suffix version available in technology indicated
- B = "B" suffix version available in technology indicated

## Positive-NAND Gate with Open-Collector Outputs

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	
Dual 4-Input	'22	•		•							SDLD001
					B						SDAD001B
Triple 3-Input	'12	•	•								SDLD001
					A						SDAD001B
Quad 2-Input	'01	•	•								SDLD001
					•						SDAD001B
								•			SCAD001
	'03	•	•	•							SDLD001
					B						SDAD001B
								•			SCLD001A
'1003				A						SDAD001B	

## Positive-AND Gate with Open-Collector Outputs

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	
Triple 3-Input	'15		•	•							SDLD001
					A						SDAD001B
Quad 2-Input	'09	•	•	•							SDLD001
					•						SDAD001B
								•			SCLD001A
							•				SDFD001
	'7001							•			SCLD001A

## Positive-AND Gates

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	
Dual 4-Input	'21				A	•					SDAD001B
			•								SDLD001
								•			SCLD001A
									•		SDFD001
	'11021								•	•	SCAD001
Triple 3-Input	'11		•	•		A	•				SDLD001
								•			SDAD001B
									•		SCLD001A
								•			SDFD001
	'1011				A						SDAD001B
'11011								•	•	SCAD001	
Quad 2-Input	'08	•	•	•							SDLD001
					•	•					SDAD001B
									•		SCLD001A
								•			SDFD001
	'1008				A	A					SDAD001B
'11008								•	•	SCAD001	

See "How to read Digital Logic Products selection tables" on page 3-4.



## Positive-OR Gates

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	
Triple 3-Input	'4075							•			SCLD001A
Quad 2-Input	'32	•	•	•							SDLD001
					•	•					SDAD001B
								•			SCLD001A
											SDFD001
	'1032				A	A					SDAD001B
'11032									•	•	SCAD001
Quad 2-Input	'7032							•			SCLD001A
Hex 2-Input	'832				A	B					SDAD001B
								•			SCLD001A
	'1832				A	•					SDAD001B

## Positive-NOR Gates

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	
Dual 4-Input with Strobe	'25	•									SDLD001
Dual 4-Input	'4002							•			SCLD001A
Dual 5-Input	'260			•							SDLD001
Triple 3-Input	'27	•	•								SDLD001
					•	•					SDAD001B
								•			SCLD001A
									•		SDFD001
	'11027									•	•
Quad 2-Input	'02	•	•	•							SDLD001
					•	•					SDAD001B
								•			SCLD001A
									•		SDFD001
	'28	•	•								SDLD001
					A						SDAD001B
	'33	•	•								SDLD001
					A						SDAD001B
	'36								•		SCLD001A
								•			SDFD001
	'1002				A						SDAD001B
'1036					A					SDAD001B	
'7002								•		SCLD001A	
'11002									•	•	SCAD001
Hex 2-Input	'805				A	B					SDAD001B
								•			SCLD001A
	'1805				A	•					SDAD001B

See "How to read Digital Logic Products selection tables" on page 3-4.

## Positive-OR/NOR Gates

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT	
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT		
8-Input	'4078								A			SCLD001A

## Exclusive OR/NOR Gates

DESCRIPTION	TYPE	TECHNOLOGY						DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	
Quad 2-Input Exclusive OR Gates with Totem-Pole Outputs	'86	•	A	•				SDLD001
					•			SDAD001B
							•	SCLD001A
Quad 2-Input Exclusive OR Gates with Open-Collector Outputs	'386						•	SCLD001A
								SDLD001
	'136	•	•		•			SDAD001B
Quad 2-Input Exclusive-NOR Gates	'266		•				•	SDAD001B
						▲		SDAD001B
	'810				•	▲		SDLD001
Quad 2-Input Exclusive-NOR Gates with Open-Collector Outputs	'7266						•	SCLD001A
								•
Quad 2-Input Exclusive-NOR Gates with Open-Collector Outputs	'811				•	▲		SDAD001B
Quad Exclusive OR/NOR Gates	'135			•				SDLD001

## AND-NOR Gates

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
2-Wide 4-Input	'55		•						SDLD001
4-Wide 4-2-3-2 Input	'64			•					SDLD001
4-Wide 2-2-3-2 Input	'54	•	•						SDLD001
Dual 2-Wide 2-Input	'51	•	•	•					SDLD001
							•		SCLD001A

## AND-NOR Gates with Open-Collector Outputs

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
4-Wide 4-2-3-2-Input	'65			•					SDLD001

## Expandable Gates

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Dual 2-Wide AND-OR-Invert	'50	•							SDLD001
Dual 4-Input Positive-NOR with Strobe	'23	•							SDLD001

## Multifunction Gates and Elements

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Inverter,3-/4-Input NAND/NOR Combination	'7006						•		SCLD001A
6-Section NAND Invert,NOR	'7008						•		SCLD001A
Quadruple Complementary Output Logic Element	'265	•							SDLD001

## Delay Elements

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Inverting and Noninverting Elements 2-Input NAND-Buffer	'31		•						SDLD001

See "How to read Digital Logic Products selection tables" on page 3-4.

# INVERTERS/NONINVERTING BUFFERS

## Hex Inverters/Noninverters

DESCRIPTION	TYPE	TECHNOLOGY										DOCUMENT	
		STD TTL	LS	S	ALS	AS	F	HC	AC	ACT	HCU		
Hex Inverters	'04	•	•	•									SDLD001
					B	•							SDAD001B
								•					SCLD001A
											•		SCLD001A
								•					SDFD001
	'11004								•	•		SCAD001	
	'05	•	•	•									SDLD001
					A								SDAD001B
									•				SCLD001A
	'06	•										SDLD001	
	'14	•	•										SDLD001
									•				SCLD001A
	'16	•											SDLD001
	'19		•										SDLD001
	'1004					•	A						SDAD001B
'1005					•							SDAD001B	
Hex Noninverter	'34				•	•							SDAD001B
	'11034								•	•			SCAD001

# DRIVER AND BUS TRANSCEIVERS

## Hex Drivers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Hex 2-Input Driver	'808				A	B			SDAD001B
							•		SCLD001A
	'1808				A	•			SDAD001B
Hex Driver	'07	•							SDLD001
	'17	•							SDLD001
	'35				A				SDAD001B
	'1034				•	A			SDAD001B
	'1035				•				SDAD001B
Noninverting Hex Buffers/ Drivers	'365	A	A						SDLD001
							•		SCLD001A
	'366	A	A						SDLD001
							•		SCLD001A
	'367	A	A						SDLD001
							•		SCLD001A
'368	A	A						SDLD001	
						•		SCLD001A	

## Drivers with Open-Collector Outputs

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Noninverting Octal Buffers, Drivers	'757					•			SDAD001B
	'760				▲	•			SDAD001B
Inverting Octal Buffers, Drivers	'756				•	•			SDAD001B
	'763				•	•			SDAD001B
Inverting and Noninverting Octal Buffers, Drivers	'762					•			SDAD001B

## Bus Transceivers with Open Collector Outputs

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	F	HC	
Noninverting Quad Transceivers	'759					•			SDAD001B
Inverting Quad Transceivers	'758				•	•			SDAD001B
12 mA/24 mA/40 mA Sink Transceivers	'615				•				SDAD001B
	'621				A	•			SDAD001B
							•		SDFD001
	'639				A	•			SDAD001B
	'641				A	•			SDAD001B
			•						SDL001
12 mA/24 mA/48 mA Sink Inverting Output Transceivers	'614				•				SDAD001B
	'622				A	•			SDAD001B
							•		SDFD001
	'638				A	•			SDAD001B
	'642				A	•			SDAD001B
			•						SDL001
	'653				•				SDAD001B
12 mA/24 mA/48 mA Sink, True and Inverting Output Transceivers	'644				A	•			SDAD001B
			•						SDL001
Registered With Multiplexed 12 mA/24 mA/48 mA True Output Transceivers	'647				•				SDAD001B
	'654				•				SDVD001
Registered with Multiplexed 12 mA/24 mA/48 mA Inverting Output Transceivers	'649				•				SDVD001

# Drivers with 3-State Outputs

DESCRIPTION	TYPE	TECHNOLOGY											DOCUMENT			
		STD TTL	LS	S	ALS	AS	F	HC	HCT	AC	ACT	BCT				
Quad Buffers/ Drivers with Independent Output Controls	'125	•	A						•						SDLD001	
															SCLD001A	
	'126	•	A						•						SDLD001	
										•					SCLD001A	
Noninverting Octal Buffers/ Drivers	'241		•	•						•	•				SDLD001	
					A	•									SDAD001B	
								•							SCLD001A	
														▲	SDFD001	
														▲	TBA	
	'11241												▲		SCAD001	
	'244		•	•												SDLD001
						A	•									SDAD001B
									•		•					SCLD001A
										•						SDFD001
														▲	TBA	
	'11244										•	•			SCAD001	
	'465		•													SDLD001
						A										SDAD001B
	'467				A										SDAD001B	
	'541		•													SDLD001
						•									SDAD001B	
									•						SCAD001	
											•				SCLD001A	
'1244				A										SDAD001B		
Inverting Octal Buffers/ Drivers	'231					•	•								SDAD001B	
				•	•										SDLD001	
	'240					A	•								SDAD001B	
									•		•				SCLD001A	
										•					SDFD001	
														▲	TBA	
	'11240										•				SCAD001	
												•			SCAD001	
	'466		•												SDLD001	
						A									SDAD001B	
	'468				A									SDAD001B		
	'540		•												SDLD001	
							•								SDAD001B	
										•					SCAD001	
											•			SCAD001		
'1240					•								SDAD001B			

See "How to read Digital Logic Products selection tables" on page 3-4.

## Drivers with 3-State Outputs (Continued)

DESCRIPTION	TYPE	TECHNOLOGY											DOCUMENT	
		STD TTL	LS	S	ALS	AS	F	HC	HCT	AC	ACT	BCT		
Inverting and Noninverting Octal Buffers/ Drivers	'230					•								SDAD001B
Noninverting 10-Bit Buffers/ Drivers	'2827												•	SCLS051
	'29827				•									SDVD001
													•	SCLS052
Inverting 10-Bit Buffers/ Drivers	'2828												•	SCLS051
	'29828				•									SDVD001
													•	SCLS052

## Bus Transceivers with 3-State Outputs

DESCRIPTION	TYPE	TECHNOLOGY											DOCUMENT		
		LS	S	ALS	AS	F	HC	HCT	AC	ACT	BCT				
Noninverting Quad Transceivers	'243	•												SDLD001	
				A	•									SDAD001B	
							•	•	•					SCLD001A	
														SDFD001	
Inverting Quad Transceivers	'242	•												SDLD001	
				B	•									SDAD001B	
							•	•	•					SCLD001A	
	'1242			•										SDFD001	
Quad Transceivers	'442	•												SDAD001B	
Octal Transceivers	'245	•												SDLD001	
				A	•									SDAD001B	
								•						SCLD001A	
									•					SCAD001	
								•						SDFD001	
													▲	TBA	
	'11245									▲	▲			SCAD001	
	'620							•	•						SCLD001A
				A	•										SDAD003
							•								SDFD001
	'11620									▲	▲			SCAD001	
	'640							•							SCAD001
									•						SCAD001
			A	•										SDAD001B	
•														SDLD001	
'11640									▲	▲			SCAD001		

See "How to read Digital Logic Products selection tables" on page 3-4.



# Bus Transceivers with 3-State Outputs (Continued)

DESCRIPTION	TYPE	TECHNOLOGY										DOCUMENT		
		LS	S	ALS	AS	F	HC	HCT	AC	ACT	BCT			
Octal Transceivers	'643						•						SCAD001	
								•					SCAD001	
				A	•								SDAD001B	
	'11643								▲	▲		SCAD001		
	'1245			A								▲	SDAD003	
												▲	TBA	
Octal Bus Transceivers with Registers	'543					▲							SDFD001	
	'544					▲							SDFD001	
	'646						•	•						SCLD001
					•	•								SDAD001B
		•												SDLD001
	'648						•	•						SCLD001A
					•	•								SDVD001
		•												SDLD001
	'651						•	•						SCLD001A
					•	•								SDVD001
		•												SDLD001
	'652						•	•						SCLD001A
					•	•								SDVD001
		•												SDLD001
	'11646								▲	▲			SCAD001	
'11648								▲	▲			SCAD001		
'11651								▲	▲			SCAD001		
'11652								▲	▲			SCAD001		
8-/9-Bit Bus Transceivers with Parity Checker/Generator	'658						•	•					SCLD001A	
	'659						•	•					SCLD001A	
	'664						•	•					SCLD001A	
	'665						•	•					SCLD001A	
	'29833				•									SDVD001
													▲	TBA
	'29834				•									SDVD001
													▲	TBA
	'29853				•									SDVD001
													▲	TBA
	'29854				•									SDVD001
												▲	TBA	
Noninverting 9-Bit Transceivers	'29863				•								SDVD001	
												•	SCLS055	
Inverting 9-Bit Transceivers	'29864				•								SDVD001	
												▲	TBA	
Noninverting 10-Bit Transceivers	'29861				•								SDVD001	
												•	SCLS056	
Inverting 10-Bit Transceivers	'29862				•								SDVD001	
												▲	TBA	

See "How to read Digital Logic Products selection tables" on page 3-4.

## Bus Transceivers with 3-State Outputs (Continued)

DESCRIPTION	TYPE	TECHNOLOGY										DOCUMENT		
		LS	S	ALS	AS	F	HC	HCT	AC	ACT	BCT			
12 mA/24 mA/ 48 mA Sink, True Output Transceivers	'623			A	•								SDAD003	
		•											SDLD001	
								•	•					SCLD001A
							•							SDFD001
	'645							•						SCLD001A
									•					SCLD001A
		•		A	•									SDAD001B
													SDLD001	
	'654			•									SDAD001B	
'1640			A									SDAD001B		
'1645			A									SDAD001B		
'11623									▲	▲		SCAD001		
Universal Transceiver/ Port Controllers	'852				▲								SDVD001	
	'856				▲								SDVD001	
	'877				▲								SDVD001	

## Line Drivers/ Bus Transceivers/ MOS Drivers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT	
		STD TTL	LS	S	ALS	AS	HC	BCT		
Bus Transceivers	'2242				•					SDAD001B
	'2620					•				SDAD001B
	'2623					•				SDAD001B
	'2640					•				SDAD001B
	'2645					•				SDAD001B
Line Drivers	'2240				•					SDAD001B
	'2240								▲	TBA
	'2241								▲	TBA
	'2244				▲					TBA
	'2244								▲	TBA
	'2540				•					SDAD001B
	'2541				•					SDAD001B

## Line Drivers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Octal Buffers AND/Line Drivers with Input Pull-up Resistors	'746				•				SDAD001B
	'747				•				SDAD001B
Octal/Line Drivers/with 3-State Output	'2540				•				SDAD001B
	'2541				•				SDAD001B

See "How to read Digital Logic Products selection tables" on page 3-4.

## 50-Ohm/75-Ohm Line Drivers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Quad 2-Input Positive-NOR	'128	•							SDLD001
Dual 4-Input Positive-NAND	'140			•					SDLD001
Hex 2-Input Positive-NAND	'804				A	B			SDAD001B
							•		SCLD001A
Hex 2-Input Positive-NOR	'805				A	•			SDAD001B
					A	B			SDAD001B
Hex 2-Input Positive-OR	'808				A	•			SDAD001B
							•		SCLD001A
Hex 2-Input Positive-OR	'832				A	B			SDAD001B
							•		SCLD001A
	'1832				A	•			SDD001B

## Multifunction Drivers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Dual Pulse Synchronizers/ Drivers	'120	•							SDLD001

See "How to read Digital Logic Products selection tables" on page 3-4.

# FLIP-FLOP

## Dual and Single Flip-Flops

DESCRIPTION	TYPE	TECHNOLOGY									DOCUMENT	
		STD TTL	LS	S	ALS	AS	HC	AC	ACT	F		
Dual J-K Edge Triggered	'73	•	A									SDLD001
							•					SCLD001A
	'76	•	A									SDLD001
							•					SCLD001A
	'78		A									SDLD001
							•					SCLD001A
	'107	•	A									SDLD001
							•					SCLD001A
	'109	•	A									SDLD001
						A	•					SDAD001B
								•				SCLD001A
											•	SDFD001
	'112		A	A								SDLD001
						A						SDAD001B
								•				SCLD001A
											•	SDFD001
	'113		A	A								SDLD001
						A						SDAD001B
							•				SCLD001A	
										•	SDFD001	
'114		A	A								SDLD001	
					A						SDAD001B	
							•				SCLD001A	
										•	SDFD001	
'11109								•	•		SCAD001	
Single J-K Edge Triggered	'70	•									SDLD001	
Dual D-Type	'74	•	A	•								SDLD001
					A	•						SDAD001B
							•					SCLD001A
											•	SDFD001
'11074								•	•		SCAD001	
Dual D-Type with 2-Input NAND/NOR Gates	'7074						•				SCLD001A	
	'7075						•				SCLD001A	
	'7076						•				SCLD001A	
Dual 4-Bit D-Type Edge-Triggered	'874				B	•					SDAD001B	
	'876				A	•					SDAD001B	
	'878				A	•					SDAD001B	
	'879				A	•					SDAD001B	

See "How to read Digital Logic Products selection tables" on page 3-4.

## Quad and Hex Flip-Flops

DESCRIPTION	OUTPUTS	NO. OF FF's	TYPE	TECHNOLOGY								DOCUMENT			
				STD TTL	LS	S	ALS	AS	HC	F					
D-Type	Q, $\bar{Q}$	4	'175	•	•	•							SDLD001		
							•	•					SDAD001B		
										•				SCLD001A	
												•	SDFD001		
					'379		•								SDLD001
											•			SCLD001A	
											•	SDFD001			
	Q	6	'174	•	•	•								SDLD001	
							•	•						SDAD001B	
											•			SCLD001A	
													•	SDFD001	
					'378		•								SDLD001
										•				SCLD001A	
											•	SDFD001			
J-K	Q	4	'276	•										SDLD001	
			'279	•	A									SDLD001	
			'376	•										SDLD001	

## Octal, 9-Bit, and 10-Bit D-Type Flip-Flops

DESCRIPTION	NO. OF BITS	OUTPUTS	TYPE	TECHNOLOGY												DOCUMENT				
				STD TTL	LS	S	ALS	AS	HC	HCT	AC	ACT	BCT	F						
True Data	Octal	3-State	'374		•	•	•										SDLD001			
							•	•									SDAD001B			
										•	•							SCLD001A		
																▲		TBA		
					'574				A	•									•	SDFD001
											•	•							SDAD001B	
												•	•						•	SCLD001A
			'11374									▲	▲				SCAD001			
True Data with Clear	Octal	2-State	'273	•	•												SDLD001			
							•											SDAD001B		
										•									SCLD001A	
																	•	SDFD001		
		3-State	'575					A	•										SDAD001B	
				'874				A	•										SDAD001B	
'878						A	•										SDAD001B			
True with Enable	Octal	2-State	'377		•												SDLD001			
										•								SCLD001A		
																		•	SDFD001	

See "How to read Digital Logic Products selection tables" on page 3-4.

## Octal, 9-Bit, and 10-Bit D-Type Flip-Flops (Continued)

DESCRIPTION	NO. OF BITS	OUTPUTS	TYPE	TECHNOLOGY											DOCUMENT				
				STD TTL	LS	S	ALS	AS	HC	HCT	AC	ACT	BCT	F					
Inverting	Octal	3-State	'534				•	•									SDAD001B		
									•								SCLD001A		
											•							SCLD001A	
															▲			TBA	
																•		SDFD001	
			'564						A										SDAD001B
											•	•							SCLD001A
																	•		SDFD001
'576					A	•										SDAD001B			
'826						•										SDVD001			
'11534												▲	▲			SCAD001			
Inverting with Clear	Octal	3-State	'577			A	•										SDAD001B		
			'879			A	•										SDAD001B		
Inverting with Preset	Octal	3-State	'876			A	•										SDAD001B		
True	Octal	3-State	'825				•										SDVD001		
	9-Bit	3-State	'823				•										SDVD001		
			'1823				•										SDAS126		
Inverting	9-Bit	3-State	'824				•										SDVD001		
True	10-Bit	3-State	'821				•											SDVD001	
			'1821				•											SDAS131	
Inverting	10-Bit	3-State	'822				•										SDVD001		

## LATCHES AND MULTIVIBRATORS

### Quad Latches with 2-State Outputs

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Bistable	'75	•	•						SDLD001
							•		SCLD001A
	'375		•						SDLD001
							•		SCLD001A
S-R	'279	•	A					SDLD001	

### 3 Monostable Multivibrators

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Single	'121	•							SDLD001
	'122	•	•						SDLD001
	'130	•							SDLD001
Dual	'123	•	•						SDLD001
	'221	•	•						SDLD001
	'423		•						SDLD001

### D-Type Octal, 9-Bit, and 10-Bit Read-Back Latches

DESCRIPTION	NO. OF BITS	TYPE	TECHNOLOGY							DOCUMENT
			STD TTL	LS	S	ALS	AS	HC	HCT	
Edge-Triggered Inverting and Noninverting	Octal	'996				•				SDVD001
Transparent True	Octal	'990				•				SDVD001
	9-Bit	'992				•				SDVD001
	10-Bit	'994				•				SDVD001
Transparent Noninverting	Octal	'991				•				SDVD001
	9-Bit	'993				•				SDVD001
	10-Bit	'995				•				SDVD001
Transparent with Clear True Outputs	Octal	'666				•				SDVD001
Transparent with Clear Inverting Outputs	Octal	'667				•				SDVD001

## Octal, 9-Bit, and 10-Bit Latches

DESCRIPTION	NO. OF BITS	OUTPUT	TYPE	TECHNOLOGY											DOCUMENT						
				STD TTL	LS	S	ALS	AS	HC	HCT	AC	ACT	BCT	F							
Transparent	Octal	3-State	'373		•	•		•	•									SDLD001			
							•	•											SDAD001B		
										•	•									SCLD001A	
						'573												•		TBA	
																		•		SDFD001	
																					SDAD001B
						'11373				B	•										SCLD001A
												•	•								SDFD001
															•	•					SCAD001
Dual 4-Bit Transparent	Octal	2-State	'116	•														SDLD001			
		3-State	'873				B	•										SDAD001B			
Inverting Transparent	Octal	3-State	'533				•	•										SDAD001B			
										•	•								SCLD001A		
																•			TBA		
																	•			SDFD001	
						'11533									•	•				SCAD001	
						'563				A											SDAD001B
												•	•								SCLD001A
																		•			SDFD001
			'580				A	•										SDAD001B			
Dual 4-Bit Inverting Transparent	Octal	3-State	'880				A	•										SDAD001B			
2-Input Multiplexed	Octal	3-State	'604						•									SCLD001A			
		OC	'607		•													SDLD001			
Addressable	Octal	2-State	'259	•	B													SDLD001			
							•												SDAD001B		
											•									SCLD001A	
		Q Only	'4724							•									SCLD001A		
True	10-Bit	3-State	'841				•	•										SDVD001			
			'1841					•											SDAS130		
True	9-Bit	3-State	'843				•	•										SDVD001			
			'1843					•											SDAS127		
True	Octal	3-State	'845				•	•										SDVD001			
Inverting	10-Bit	3-State	'842				•	•										SDVD001			
	9-Bit	3-State	'844				•	•										SDVD001			
	Octal	3-State	'846				•	•										SDVD001			



# REGISTERS

## Shift Registers

DESCRIPTION	NO. OF BITS	MODES				TYPE	TECHNOLOGY						DOCUMENT		
		S-	S	L	H		STD TTL	LS	S	ALS	AS	HC		F	
Sign Protected		X		X	X	'322		A							SDLD001
Parallel-In Parallel-Out Bidirectional	4	X	X	X	X	'194	•	A	•						SDLD001
											•				SDAD001B
											•				SCLD001A
	8	X	X	X	X	'198	•								SDLD001
		X	X	X	X	'299		•	•						SDLD001
										•					SDAD001B
												•			SCLD001A
													•		SDFD001
		X	X	X	X	'323		•							SDLD001
										•					SDAD001B
											•			SCLD001A	
												•		SDFD001	
Parallel-In Parallel-Out	4	X		X		'95	A	B						SDLD001	
											•			SDAD001B	
	X		X		'195	•	•	•					SDLD001		
											•			SCLD001A	
	X		X		'295		B							SDLD001	
	X		X		'395		A							SDLD001	
	5	X		X		'96	•	•						SDLD001	
8	X		X	X	'199	•							SDLD001		
Serial-In Parallel-Out	8	X				'164	•	•					•	SDLD001	
													•	SCLD001A	
Parallel-In Serial-Out	8	X		X	X	'165	•	A					•	SDLD001	
													•	SCLD001A	
	X		X	X	'166	•	A					•	SDLD001		
												•	SCLD001A		
16	X		X	X	'674		•						SDLD001		
Serial-In Serial-Out	8	X				'91		•						SDLD001	

NOTE: Modes; S- = S-R, S = S-L, L = Load, H = Hold

## Shift Registers with Latches

DESCRIPTION	NO. OF BITS	OUTPUT	TYPE	TECHNOLOGY						DOCUMENT
				STD TTL	LS	S	ALS	AS	HC	
Parallel-In, Parallel-Out with Output Latches	4	3-State	'671		•					SDLD001
			'672		•					SDLD001
Serial-In Parallel-Out with Output Latches	8	Buffered	'594		•					SDLD001
								•	SCLD001A	
		3-State	'595		•					SDLD001
									•	SCLD001A
	OC	'599		•					SDLD001	
16	2-State	'673		•					SDLD001	
Parallel-In, Serial-Out with Input Latches	8	2-State	'597		•					SDLD001
Parallel I/O Ports with Input Latches Multiplexed Serial Inputs	8	3-State	'598		•					SDLD001

## Sign-Protected Registers

DESCRIPTION	NO. OF BITS	MODES				TYPE	TECHNOLOGY						DOCUMENT	
		S-	S	L	H		STD TTL	LS	S	ALS	AS	HC		
Sign-Protected Registers	8	X		X	X	'322		A						SDLD001

## Register Files

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY						DOCUMENT
			STD TTL	LS	S	ALS	AS	HC	
Dual 16 Words × 4 Bits	3-State	'870				▲	•		SDVD001
		'871				▲	•		SDVD001
4 Words × 4 Bits	OC	'170	•	•					SDLD001
	3-State	'670		•					SDLD001
8 Words × 2 Bits	3-State	'172	•						SDLD001
64 Words × 40 Bits	3-State	'8834					▲		TBA

## Other Registers

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	BCT	
Quadruple Multiplexers with Storage	'298	•	•						SDLD001
						•			SDAD001B
							•		SCLD001A
8-Bit Universal Shift Registers	'299		•	•					SDLD001
					•				SDAD001B
Quadruple Bus Buffer Register	'173	•	A						SDLD001
							•		SCLD001A
Data Selector/Multiplexer/ Register	'356		•						SDLD001
							•		SCLD001A
Dual-Rank 8-Bit Shift Register	'963				▲				SDVD001
	'964				▲				SDVD001
8-Bit Diagnostic/Pipeline Register	'819				•			•	SDAS105
		'29818			•				SDAS105
									▲

3

Digital Logic Products

# COUNTERS

## Synchronous Counters — Positive-Edge Triggered

DESCRIPTION	PARALLEL LOAD	TYPE	TECHNOLOGY							DOCUMENT			
			STD TTL	LS	S	ALS	AS	HC	F				
Decade	Sync	'160	•	A							SDLD001		
						B	•				SDAD001B		
									•			SCLD001A	
										•	SDFD001		
		'162	A	•								SDLD001	
						B	•					SDAD001B	
								•			SCLD001A		
	'560					A					SDAD001B		
									▲		SCLD001A		
										•	SDFD001		
	Decade Up/ Down	Sync	'168				B	•				SDAD001B	
											•	SDFD001	
												SDLD001	
'190			•	•								SDLD001	
							•					SDAD001B	
									•			SCLD001A	
'192		•	•								SDLD001		
						•					SDAD001B		
								•			SCLD001A		
Sync		'568				A						SDAD001B	
											•	SDFD001	
										▲		SCLD001A	
4-Bit Binary	Sync	'161	•	A							SDLD001		
						B	•				SDAD001B		
									•			SCLD001A	
											•	SDFD001	
			'163	•	A	•							SDLD001
							B	•					SDAD001B
									•			SCLD001A	
		'561					A					SDAD001B	
												SDLD001	
										▲		SCLD001A	
		'691								▲		SCLD001A	
												SDLD001	
										SCLD001A			
8-Bit Binary	Sync	'8161				•					SDAS116		
		'8163				•					SDAS104		

## Synchronous Counters — Positive-Edge Triggered (Continued)

DESCRIPTION	PARALLEL LOAD	TYPE	TECHNOLOGY							DOCUMENT
			STD TTL	LS	S	ALS	AS	HC	F	
4-Bit Binary Up/Down	Async	'191	•	•						SDLD001
						•				SDAD001B
								•		SCLD001A
		'193	•	•						SDLD001
						•				SDAD001B
								•		SCLD001A
	Sync	'169			B	•				SDLD001
							B	•		SDAD001B
										•
		'569					A			
									•	SDFD001
										SDLD001
8-Bit Up/Down	Sync	'8169				•				SDAS117
	Async CLR	'867				•	•			SDVD001
	Sync CLR	'869				•	•			SDVD001
Divide-by-10 Johnson Counter		'4017						•	SCLD001A	
Divide-by-8 Johnson Counter		'7022						•	SCLD001A	

## Asynchronous Counters (Ripple Clock) — Negative-Edge Triggered

DESCRIPTION	PARALLEL LOAD	TYPE	TECHNOLOGY						DOCUMENT	
			STD TTL	LS	S	ALS	AS	HC		
Decade	Set-to-9	'90		•						SDLD001
	Yes	'176	•							SDLD001
	Yes	'196	•	•	•					SDLD001
	Set-to-9	'290		•						SDLD001
4-Bit Binary	None	'93	A	•						SDLD001
	Yes	'177	•							SDLD001
	Yes	'197	•	•	•					SDLD001
	None	'293	•	•						SDLD001
Divide-by-12 Dual Decade	None	'92	A	•						SDLD001
		'390	•	•					•	SCLD001A
	Set-to-9	'490							•	SCLD001A
Dual 4-Bit Binary	None	'393	•	•						SDLD001
									•	SCLD001A
7-Bit Binary		'4024							•	SCLD001A
12-Bit Binary		'4040							•	SCLD001A
14-Bit Binary		'4020							•	SCLD001A
		'4060							•	SCLD001A
		'4061							•	SCLD001A

See "How to read Digital Logic Products selection tables" on page 3-4.

## 8-Bit Binary Counters with Registers

DESCRIPTION	PARALLEL LOAD	TYPE	TECHNOLOGY						DOCUMENT
			STD TTL	LS	S	ALS	AS	HC	
Parallel Register Outputs	3-State	'590		•					SDLD001
								•	SCLD001A
	OC	'591		•					SDLD001
Parallel Register Inputs	2-State	'592		•					SDLD001
Parallel I/O	3-State	'593		•					SDLD001

## Frequency Dividers, Rate Multipliers

DESCRIPTION	TYPE	TECHNOLOGY						DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	
60-Bit Binary Rate Multiplier	'97	•						SDLD001
Decade Rate Multiplier	'167	•						SDLD001
Programmable Frequency Dividers/ Digital Timers	'292		•					SDLD001
	'294		•					SDLD001

# DECODERS, ENCODERS, DATA SELECTORS/MULTIPLEXERS AND SHIFTERS

## Encoders/Data Selectors/Multiplexers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY							DOCUMENT		
			STD TTL	LS	S	ALS	AS	HC	F			
Quad 2-to-1	2-State	'157	•	•	•						SDLD001	
						•	•				SDAD001B	
									•		SCLD001A	
										•	SDFD001	
		'158				•	•					SDLD001
								•	•			SDAD001B
										•		SCLD001A
											•	SDFD001
		'298			•	•						SDLD001
									•			SDAD001B
										•		SCLD001A
											•	SDFD001
	3-State	'257			B	•						SDLD001
							•					SDAD001B
									•			SDAD001B
										•		SCLD001A
'258										•	SDFD001	
					B	•					SDLD001	
							•	•			SDAD001B	
									•		SCLD001A	
Octal 2-to-1 with Storage	3-State	'604		•							SDLD001	
									•		SCLD001A	
	OC	'605		•						SDLD001		
	3-State	'606		•						SDLD001		
	OC	'607		•						SDLD001		
Dual 4-to-1	2-State	'153	•	•	•						SDLD001	
						•	•				SDAD001B	
									•		SCLD001A	
										•	SDFD001	
	3-State	'253			•	•					SDLD001	
							•	•			SDAD001B	
									•		SCLD001A	
										•	SDFD001	
	2-State	'352			•						SDLD001	
							•	•			SDAD001B	
									•		SCLD001A	
										•	SDFD001	
	3-State	'353			•						SDLD001	
							•	•			SDAD001B	
								•		SCLD001A		
									•	SDFD001		

## Encoders/Data Selectors/Multiplexers (Continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY							DOCUMENT	
			STD TTL	LS	S	ALS	AS	HC	F		
Hex 2-to-1 Universal Multiplexer	3-State	'857				•	•			SDAD001B	
8-to-1	2-State	'151	A	•	•					SDLD001	
						•	•			SDAD001B	
									•		SCLD001A
										•	SDFD001
	3-State	'251		•	•	•				SDLD001	
						•				SDAD001B	
									•		SCLD001A
										•	SDFD001
			'354			•					SDLD001
										•	
16-to-1	2-State	'150	•							SDLD001	
	3-State	'250					•			SDVD001	
		'850					•			SDVD001	
		'851					•			SDVD001	
Full BCD	2-State	'147	•	•						SDLD001	
								•		SCLD001A	
Cascadable Octal	2-State	'148	•	•						SDLD001	
								•		SCLD001A	
	3-State	'348		•						SDLD001	



## Decoders/Demultiplexers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY								DOCUMENT		
			STD TTL	LS	S	ALS	AS	HC	HCT	F			
Dual 2-to-4	2-State	'239							•		SCLD001A		
		'139		A	•						SDLD001		
						•					SDAD001A		
	OC	'155							•		SCLD001A		
				•	A						SDLD001		
				•	•						SDAD001B		
3-to-8	2-State	'138		•	•						SDLD001		
						•	•				SDAD001B		
									•	•		SCLD001A	
											•	SDFD001	
3-to-8	2-State	'237						•	•		SCLD001A		
		'238					•	•			SCLD001A		
		'131				•	•				SDAD001B		
		'137		•								SDLD001	
						•	•					SDAD001B	
								•	•			SCLD001A	
4-to-10 BCD-to-Decimal	2-State	'42	A	•							SDLD001		
								•			SCLD001A		
4-to-16	3-State	'154	•								SDLD001		
						•					SDAD001B		
									•			SCLD001A	
	OC	'159	•									SDLD001	
			2-State	'4514						•			SCLD001A
											•		

## Shifters

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY								DOCUMENT	
			STD TTL	LS	S	ALS	AS	HC	HCT	F		
4-Bit Shifter	3-State	'350									•	SDFD001
Parallel 16-Bit Multimode Barrel Shifter	3-State	'897						A				SDVD001
32-Bit Barrel Shifter	3-State	'8838						•				SDVD001
32-Bit Shuffle/Exchange	3-State	'8839						•				SDVD001

## Open-Collector Display Decoders/Drivers

DESCRIPTION	OFF-STATE OUTPUT VOLTAGE	TYPE	TECHNOLOGY							DOCUMENT	
			STD TTL	LS	S	ALS	AS	HC	HCT		
BCD-to-Decimal	30 V	'45	•								SDLD001
	15 V	'145	•	•							SDLD001
BCD-to-7 Segment	15 V	'46	A								SDLD001
		'47	A	•							SDLD001
		'247		•							SDLD001

## Open Collector Display Decoder/Drivers with Counters/Latch

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	L	S	ALS	AS	HC	HCT	
BCD Counter/4-Bit Latch/BCD-to-7-Segment Decoder/LAD Driver	'143	•							SDLD001

## Voltage-Controlled Oscillators

NO. OF VCOs	COMP'L Z <sub>OUT</sub>	ENABLE	RANGE OUTPUT	R <sub>EXT</sub>	f <sub>max</sub> MHz	TYPE	TECHNOLOGY		DOCUMENT
							LS	S	
Single	No	No	No	No	70	'321	•		SDLD001
Single	Yes	Yes	Yes	No	20	'624	•		SDLD001
Single	Yes	Yes	Yes	Yes	20	'628	•		SDLD001
Dual	No	Yes	Yes	No	60	'124		•	SDLD001
Dual	Yes	No	No	No	20	'625	•		SDLD001
Dual	No	Yes	Yes	No	20	'629	•		SDLD001

## Memory/Microprocessor Controllers

DESCRIPTION	TYPE	TECHNOLOGY					DOCUMENT
		LS	ALS	AS	HCT	TMS	
System Controllers, Universal OR for '888	'890			•			SDBS002
Memory Mappers	3-State	'612	•				SDVD001
	OC	'613	•				SDVD001
Memory Mappers with Output Latches	3-State	'610	•				SDVD001
	OC	'611	•				SDVD001
Dynamic Memory Controllers	16K, 64K, 256K	'2967		•			SDVD001
		'2968		•			SDVD001
		'4500				A	SDVD001
		'4502				B	SDVD001
	16K, 64K, 256K, 1 Meg	'6301		•			SDVD001
	'6302		•			SDVD001	

## Digital Loops

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	HCT	
Digital Phase-Lock Loop	'297		•						SDLD001

# COMPARATORS AND ERROR DETECTION CIRCUITS

## 4-Bit Comparators

DESCRIPTION					TYPE	TECHNOLOGY				DOCUMENT
P=Q	P>Q	P> $\bar{Q}$	OUTPUT	ENABLE		STD TTL	LS	S	HC	
Yes	Yes	No	2-State	No	'85	•	•	•		SDL001
									•	SCLD001A

## 8-Bit Identity Comparators

INPUT	DESCRIPTION						TYPE	TECHNOLOGY								DOCUMENT		
	P=Q	$\bar{P}=\bar{Q}$	P>Q	$\bar{P}>\bar{Q}$	P<Q	OUTPUT		ENABLE	LS	ALS	AS	HC	AC	ACT	F			
20K $\Omega$ Pull-up	Yes	No	No	No	No	OC	Yes	'518		•							SDAD001B	
																•	SDFD001	
	No	Yes	No	No	No	2-State	Yes	'520		•							SDAD001B	
																•	SDFD001	
									'11520					•	•			SCAD001
	No	Yes	No	No	No	OC	Yes	'522		•							SDAD001B	
	No	Yes	No	Yes	No	2-State	No	'682	•								SDL001	
												•					SCLD001A	
Standard	Yes	No	No	No	No	OC	Yes	'519		•							SDAD001B	
																•	SDFD001	
	No	Yes	No	No	No	2-State	Yes	'521		•							SDAD001B	
																•	SDFD001	
									'11521					•	•			SCAD001
	No	Yes	No	Yes	No	2-State	No	'684	•									SDL001
													•					SCLD001A
	No	Yes	No	No	No	2-State	Yes	'688	•	•							SDAD001A	
									•								SDL001	
												•					SCLD001A	
	No	Yes	No	No	No	OC	Yes	'689	•								SDL001	
										•							SDAD001A	
Latched P	No	No	Yes	No	Yes	2-State	Yes	'885				•					SDVD001	
Latched P and Q	Yes	No	Yes	No	Yes	Latched	Yes	'866				•					SDAD001A	

## Other Identity Comparators

DESCRIPTION	TYPE	TECHNOLOGY				DOCUMENT
		LS	ALS	AS	HC	
6-Bit Identity Comparator Controlling a 2-to-4-Bit Decoder	'29806		•			SDVD001
9-Bit Identity Comparator	'29809		•			

See "How to read Digital Logic Products selection tables" on page 3-4.

## Address Comparators

DESCRIPTION	OUTPUT ENABLE	LATCHED ENABLE	TYPE	TECHNOLOGY					DOCUMENT	
				S	ALS	AS	HC	HCT		
16-Bit	Yes		'677		•					SDAD001B
							•			SCLD001A
		Yes	'678		•					SDAD001B
							•			SCLD001A
12-Bit	Yes		'679		•					SDAD001B
							•			SCLD001A
		Yes	'680		•					SDAD001B
							•			SCLD001A

## Parity Generators/Checkers, Error Detection and Correction Circuits

DESCRIPTION	NO. OF BITS	TYPE	TECHNOLOGY							DOCUMENT	
			STD TTL	LS	S	ALS	AS	HC	F		
Odd/Even Parity Generators/Checkers	9	'180	•								SDLD001
								•			SCLD001A
	9	'280		•	•						SDLD001
								•			SCLD001A
							•	•			SDVD001
9	'286						•		•	SDFD001	
Error Detection and Correction Circuits	3-State	16	'616				•				SDVD001
	3-State	16	'630		•						SDLD001
	OC	16	'631		•						SDLD001
	3-State	32	'632				B	•			SDVD001
	OC	32	'633				▲				SDVD001
	3-State	32	'634				A	▲			SDVD001
	OC	32	'635				▲				SDVD001

## Fuse-Programmable Comparators

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT	
		STD TTL	LS	S	ALS	AS	HC	HCT		
16-Bit Identity Comparator	'526				•					SDAD001B
12-Bit Identity Comparator	'528				•					SDAD001B
12-Bit Identity Comparator Controlling a 2-to-4 Bit Decoder	'812				•					SDVD001
8-Bit Identity Comparator and 4-Bit Comparator	'527				•					SDAD001B

See "How to read Digital Logic Products selection tables" on page 3-4.

# ARITHMETIC CIRCUITS AND PROCESSOR ELEMENTS

## Parallel Binary Adders

DESCRIPTION	TYPE	TECHNOLOGY							DOCUMENT
		STD TTL	LS	S	ALS	AS	HC	F	
4-Bit	'83	•	•						SDLD001
	'283	•	•	•					SDLD001
							•		SCLD001A
								•	SDFD001

## Accumulators, Arithmetic Logic Units, Look-Ahead Carry Generators

3 Digital Logic Products

DESCRIPTION	TYPE	TECHNOLOGY										DOCUMENT	
		STD TTL	LS	S	ALS	AS	HCT	AC	ACT	F			
4-Bit Parallel Binary Accumulators	'681		•									SDLD001	
16-Bit by 16-Bit Multiplier/Accumulators	'1010						•					SDVD001	
									•			SCSS003B	
4-Bit Arithmetic Logic Units: Function Generators	'181		•	•								SDLD001	
						B						SDAD001B	
	'11181						•	•			SCAD001		
	'1181					•					SDVD001		
	'381		A	•								SDLD001	
											•	SDFD001	
	'881					A						SDVD001	
'11881									•		SCAD001		
4-Bit Arithmetic Logic Unit with Ripple Carry	'382		•								•	SDLD001	
Look Ahead Carry Generators	16-Bit	'182			•							SDLD001	
							▲					SDAD001B	
	32-Bit	'282					▲					SDAD001B	
			'882					A					SDAD001B
				'11882							•	•	

See "How to read Digital Logic Products selection tables" on page 3-4.

# PROGRAMMABLE LOGIC ARRAYS

## Standard High-Speed PAL<sup>®</sup> Circuits (ALS)

TYPE	INPUTS	OUTPUTS		NO. OF PINS	PACKAGES	DOCUMENT
		NO.	TYPE			
PAL16L8A	16	8	Active Low	20	FK, FN, JN	SDZD001B
PAL16R4A	16	4	Registered			
PAL16R6A	16	6	Registered			
PAL16R8A	16	8	Registered			
PAL16R6A-2	16	8	Active Low			
PAL16R4A-2	16	4	Registered			
PAL16R6A-2	16	6	Registered			
PAL16R8A-2	16	8	Registered			
PAL20L8A	20	8	Active Low	24	FK, FN, JT, NT	SDZD001B
PAL20R4A	20	4	Registered			
PAL20R6A	20	6	Registered			
PAL20R8A	20	8	Registered			
PAL20L8A-2	20	8	Active Low			
PAL20R4A-2	20	4	Registered			
PAL20R6A-2	20	6	Registered			
PAL20R8A-2	20	8	Registered			

# High Performance PAL® Circuits (ALS)

TYPE	INPUTS	OUTPUTS		NO. OF PINS	PACKAGES	DOCUMENT
		NO.	TYPE			
TIBPAL16L8-10	16	8	Active High	20	FK, FN, J, N	SDZD001B
TIBPAL16R4-10	16	4	Registered			
TIBPAL16R6-10	16	6	Registered			
TIBPAL16R8-10	16	8	Registered			
TIBPAL16L8-12	16	8	Active High			
TIBPAL16R4-12	16	4	Registered			
TIBPAL16R6-12	16	6	Registered			
TIBPAL16R8-12	16	8	Registered			
TIBPAL16H8-15	16	8	Active High	20	FK, FN, J, N	TBA
TIBPAL16HD8-15	16	8	Active High			
TIBPAL16L8-15	16	8	Active Low	20	FK, FN, J, N	SDZD001B
TIBPAL16LD8-15	16	8	Active Low	20	FK, FN, J, N	TBA
TIBPAL16R4-15	16	4	Registered	20	FK, FN, J, N	SDZD001B
TIBPAL16R6-15	16	6	Registered			
TIBPAL16R8-15	16	8	Registered			
TIBPAL16H8-25	16	8	Active High	20	FK, FN, J, N	TBA
TIBPAL16HD8-25	16	8	Active High			
TIBPAL16L8-25	16	8	Active Low	20	FK, FN, J, N	SDZD001B
TIBPAL16LD8-25	16	8	Active Low	20	FK, FN, J, N	TBA
TIBPAL16R4-25	16	4	Registered	20	FK, FN, J, N	SDZD001B
TIBPAL16R6-25	16	6	Registered			
TIBPAL16R8-25	16	8	Registered			
TIBPAL16L8-30	16	8	Active Low			
TIBPAL16R4-30	16	4	Registered			
TIBPAL16R6-30	16	6	Registered			
TIBPAL16R8-30	16	8	Registered			
TIBPAL20L8-15	20	8	Active Low	24	FK, FN, JT, NT	SDZD001B
TIBPAL20R4-15	20	4	Registered			
TIBPAL20R6-15	20	6	Registered			
TIBPAL20R8-15	20	8	Registered			
TIBPAL20L8-25	20	8	Active Low			
TIBPAL20R4-25	20	4	Registered			
TIBPAL20R6-25	20	6	Registered			
TIBPAL20R8-25	20	8	Registered			
TIBPAL20L10-20	20	10	Active Low			
TIBPAL20X4-20	20	4	Registered			
TIBPAL20X8-20	20	8	Registered			
TIBPAL20X10-20	20	10	Registered			
TIBPAL20L10-30	20	10	Active Low			
TIBPAL20X4-30	20	4	Registered			
TIBPAL20X8-30	20	8	Registered			
TIBPAL20X10-30	20	10	Registered			

## High Performance PAL<sup>®</sup> Circuits (ALS) (Continued)

TYPE	INPUTS	OUTPUTS		NO. OF PINS	PACKAGES	DOCUMENT
		NO.	TYPE			
TIBPALR19L8	19	8	Active Low	24	FK, FN, JT, NT	SDZD001B
TIBPALR19R4	19	4	Registered			
TIBPALR19R6	19	6	Registered			
TIBPALR19R8	19	8	Registered			
TIBPALT19L8	19	8	Active Low			
TIBPALT19R4	19	4	Registered			
TIBPALT19R6	19	6	Registered			
TIBPALT19R8	19	8	Registered			

## High Performance CMOS PAL<sup>®</sup> Circuits

TYPE	INPUTS	OUTPUTS		NO. OF PINS	PACKAGES	DOCUMENT
		NO.	TYPE			
TICPAL16L8-55	16	8	Active High	20	JL, N	TBA
TICPAL16R4-55	16	4	Registered			
TICPAL16R6-55	16	6	Registered			
TICPAL16R8-55	16	8	Registered			

## High Performance IMPACT<sup>™</sup> Programmable Array Logic

TYPE	INPUTS	OUTPUTS		NO. OF PINS	PACKAGES	DOCUMENT
		NO.	TYPE			
TIBPAL22V10	12 Inputs or 11 Inputs with CLK	10	I/O	24	NT, FN	SDPS015
TIBPAL22V10A						
TIBPAL22VP10-20	12 Inputs or 11 Inputs with CLK	10	I/O	24	NT, FN	SDPS106

## Field Programmable Logic Array (ALS)

TYPE	INPUTS	OUTPUTS		NO. OF PINS	ARRAY	PACKAGES	DOCUMENT
		NO.	TYPE				
TIFPLA839	14	6	3-State	24	14 × 32 × 6	FK, FN, N, NT	SDZD001A
TIFPLA840	14	6	OC				
TIB82S167B	14	6	3-State	24	14 × 48 × 6		
82S167A	14	6	3-State				
TIB82S105B	16	8	3-State	28	14 × 48 × 6	FK, FN, JD, N	
82S105A	16	8	3-State				



---

## VLSI 8-BIT-SLICE PROCESSOR FAMILY

3

Digital Logic Products


A complete discussion of the VLSI 8-Bit-Slice Processor Family will be found in Section 4, Processors and Controllers, of this Guide.

---

## VLSI 32-BIT FAMILY

A complete discussion of the VLSI 32-Bit Family will be found in Section 4, Processors and Controllers, of this Guide.

Factory orders for circuits described in this guide should include a four-part type number as explained in the following example.



MUST CONTAIN TWO TO FOUR LETTERS

SN Standard Prefix

2. Unique Circuit Description

MUST CONTAIN FOUR TO TWELVE CHARACTERS

Examples:

- 5430 74AS02
- 74LS02 54HC4078A
- 54S02 74HCT241
- 54ALS29864 74HCU04

3. Package

MUST CONTAIN ONE OR TWO LETTERS

- J, JD, JT, JW, N, NT, NW, P, W (Dual-in-line packages)†
  - FE, FK, FN (Chip carriers)
  - D, DW, (Small outline packages)†
- (from pin-connection diagram on individual data sheet)

4. Instructions (Dash No.)

MUST CONTAIN TWO NUMBERS

- 00 No Special instructions
- 10 Solder-dipped leads (N and NT packages only)
- T Tape and Reel (D and DW packages only)

† These circuits in dual-in-line and small outline packages are shipped in one of the carriers shown below. Unless a specific method of shipment is specified by the customer (with possible additional costs), circuits will be shipped in the most practical carrier. Please contact your TI sales representative for the method that will best suit your particular needs.

Dual-in-line (J, JD, JT, JW, N, NT, NW, P, W)


Small outline (D, DW)

Chip Carrier (FK, FN)

- Slide Magazines
- A-Channel Plastic Tubing
- Barnes Carrier (N only)
- Sectioned Cardboard Box
- Individual Plastic Box
- Tape and Reel (D and DW packages only)

Factory orders for leadership PAL® circuits described in this guide should include a nine-part type number as explained in the example below. Exclude the prefix when ordering standard PALs.

**EXAMPLE:**

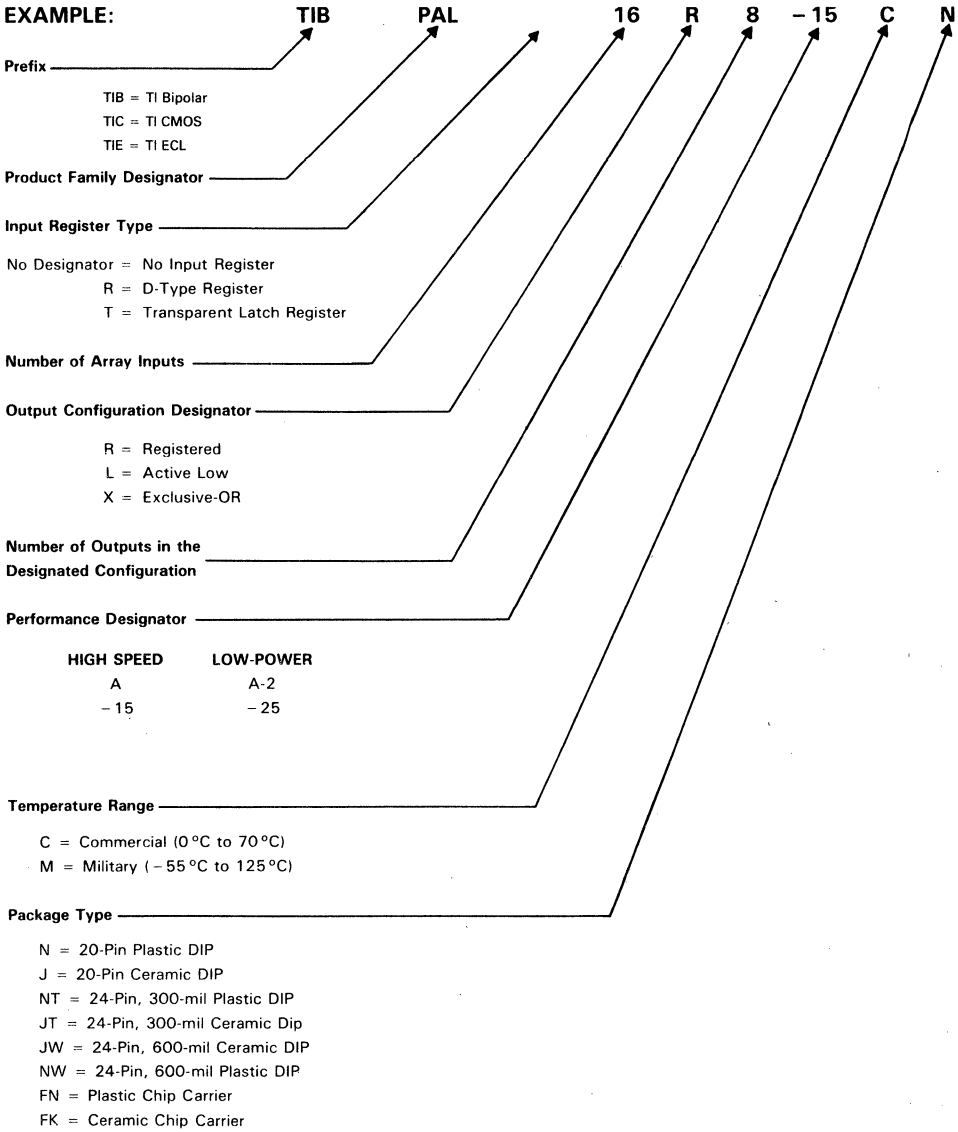

PAL is a registered trademark of Monolithic Memories Inc.



---

# PROCESSORS AND CONTROLLERS

TI processors and controllers are designed to meet a wide range of applications. For digital signal processing requirements there is the TMS320 family; for graphics, the TMS340 family; and for local area networking, the TMS380 family. For general purpose control in telecommunications, automotive and computer peripherals, TI offers its 8-bit TMS7000 family. When ultra high performance is called for, designers can turn to TI's 'AS888 8-bit processor slice and complementing components or the 'ACT88XX 32-bit processor chip set.

Along with this variety of processors and controllers, TI offers a range of memory support, including the 'ALS2967/2968 and 'ALS6301/6302 Dynamic RAM controllers and the TACT2150 Cache Address Comparator. All these controllers are available directly from TI or an authorized distributor.

TI's microprocessors and controllers utilize processing benefits gained from TI's Dynamic Random-Access Memory (DRAM) technology. For instance, the TMS320C250DSP, TMS34010 Graphics Processor and TMS380 LAN family, all draw from technology derived from 256K and one megabit DRAM processing. All TI processors and controllers also undergo rigorous quality and reliability testing.

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
Application Processors .....	4-3
TMS320 Digital Signal Processor (DSP) Family .....	4-5
First Generation — TMS32010, TMS32010-25, TMS32010-14, TMS320C10, TMS320C10-25, TMS32011, TMS320C15, TMS320C15-25, TMS320E15, TMS320C17, TMS320C17-25, TMS320E17 .....	4-5
Second Generation — TMS32020, TMS320C25 .....	4-5
Third Generation — TMS320C30 .....	4-5
Development Support .....	4-6
TMS340 Graphics Family .....	4-8
TMS34010 Graphics System Processor .....	4-9
TMS34061 Video System Controller .....	4-11
TMS34070 Color Palette .....	4-13
TMS340 Family Hardware and Software Support .....	4-14
TMS34010 Development Software .....	4-18
TMS380 LAN Adapter Chipset .....	4-20
TMS38030 System Interface .....	4-21
TMS38010 Communications Processor .....	4-21
TMS38020 Protocol Handler .....	4-21
TMS38051 and TMS38052 Ring Interface .....	4-21
ASIC-LAN Tool Kit .....	4-23
IEEE 802.2 Logical Link Control .....	4-23
TMS380 Customer Support .....	4-24

---

**Contents****Page**

TMS7000 Family — 8-Bit Microcomputers .....	4-27
TMS7000 Family — TMS70C00A, TMS70C20A, TMS70C40A, TMS70C02, TMS70C42, TMS77C82 .....	4-28
TMS7000 Development Systems .....	4-28
TMS7000 Prototyping Devices — TMS77C82 EPROM Devices .....	4-29
SE70CP160 and SE70CP162 Piggyback Devices .....	4-30
High Performance VLSI Processors .....	4-31
VLSI 8-Bit-Slice Family .....	4-31
SN54/74AS887 8-Bit Processors .....	4-31
SN54/74AS888 8-Bit Processor Slices .....	4-33
SN54/74AS890 Microsequencers .....	4-35
SN54/74AS895 8-Bit Memory Address Generators .....	4-36
SN54/74AS897A 16-Bit Parallel/Serial Barrel Shifters .....	4-38
74AS-EVM-8-Bit-Slice Evaluation Module .....	4-40
VLSI 32-Bit Family .....	4-42
Introduction and Technology .....	4-42
SN74ACT8832 Registered ALU .....	4-44
SN74ACT8818 Microsequencer .....	4-46
SN74ACT8836 Integer Multiplier .....	4-48
SN74ACT8837 Floating Point Processor .....	4-50
SN74AS8833 Funnel Shifter .....	4-52
SN74AS8838 Barrel Shifter .....	4-54
SN74AS8834 Register File .....	4-55
SN74AS8839 Shuffle/Exchange Network .....	4-57
SN74AS8840 Digital Crossbar Switch .....	4-59
Controllers .....	4-61
'TACT2150 Cache Address Comparator .....	4-61
'ALS2967 and 'ALS2968 Dynamic RAM Controllers .....	4-63
'ALS6301 and 'ALS6302 Dynamic RAM Controllers .....	4-65

**4****Processors and Controllers**

# APPLICATION PROCESSORS

## TMS320 Family of Digital Signal Processors

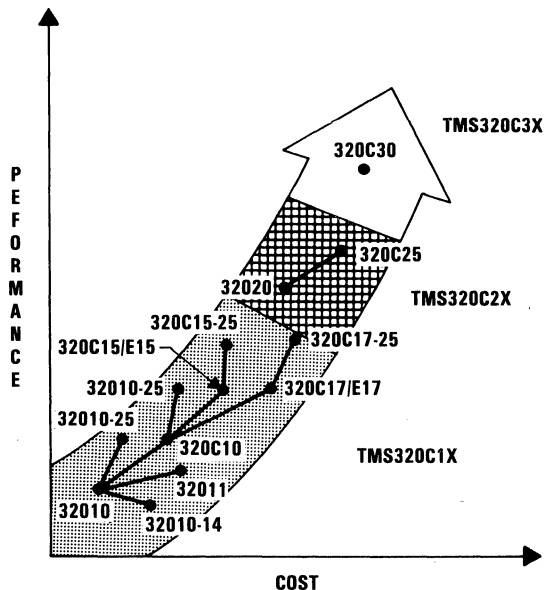


Figure 1. TMS320 DSP Application Processors

The TMS320 family of 16/32-bit single-chip digital signal processors (DSP) utilizes a Harvard-type architecture for increased parallelism and higher throughput. These economical, programmable, general purpose DSPs combine the flexibility of a high-speed controller with the numeric capability of an array processor, offering an inexpensive alternative to custom VLSI and multichip bit-slice processors.

The TMS320 digital signal processor family provides a wide range of devices to satisfy every cost/performance need. Three generations of compatible devices offer DSP solutions for application requirements ranging from very low cost (\$5) to very high performance (33 MFLOPS).

The three generations of the TMS320 family are:

- TMS320C1X (1st-gen.) — TMS32010, TMS32010-14, TMS32010-25  
— TMS32011  
— TMS320C10, TMS320C10-25  
— TMS320C15, TMS320C15-25  
— TMS320E15  
— TMS320C17, TMS320C17-25  
— TMS320E17
- TMS320C2X (2nd-gen.) — TMS32020  
— TMS320C25
- TMS320C3X (3rd-gen.) — TMS320C30



**Table 1. TMS320 Family Benefits**

PACKAGE	PERFORMANCE	SYSTEM COST	EASE OF USE
TMS320C1X	<ul style="list-style-type: none"> <li>▪ 20- and 25-MHz versions</li> <li>▪ Expanded 256-word on-chip RAM</li> <li>▪ Secure ROM/EPROM</li> <li>▪ H/W multiplier and barrel shifter</li> <li>▪ Harvard architecture</li> </ul>	<ul style="list-style-type: none"> <li>▪ Expanded 4K-word on-chip ROM</li> <li>▪ Serial port and co-processor interface</li> </ul>	<ul style="list-style-type: none"> <li>▪ 4K-word EPROM version</li> <li>▪ Flexible, general-purpose instruction set and addressing modes</li> <li>▪ Complete line of support tools</li> </ul>
TMS320C2X	<ul style="list-style-type: none"> <li>▪ Cycle times as fast as 10-ns (10 MIPS)</li> <li>▪ 128K-word program/data space accessible at full speed</li> <li>▪ On-chip data RAM up to 544 16-bit words</li> <li>▪ H/W multiplier and barrel shifter</li> <li>▪ Harvard architecture</li> </ul>	<ul style="list-style-type: none"> <li>▪ On-chip program ROM up to 4K 16-bit words</li> <li>▪ Serial port, timer, multiprocessor I/F</li> </ul>	<ul style="list-style-type: none"> <li>▪ Flexible general purpose instruction set and addressing modes</li> <li>▪ Complete line of support tools</li> <li>▪ High-level language supported</li> </ul>
TMS320C3X	<ul style="list-style-type: none"> <li>▪ 60-ns single-cycle execution time (more than 33 MFLOPS)</li> <li>▪ 2K × 32-bit dual-access RAM</li> <li>▪ 4K × 32-bit dual-access ROM</li> <li>▪ 64 × 32-bit instruction cache</li> <li>▪ Single-cycle floating point multiply/accumulate</li> <li>▪ On-chip DMA controller</li> <li>▪ Zero-overhead loops and single-cycle branches</li> </ul>	<ul style="list-style-type: none"> <li>▪ On-chip serial ports and timers</li> <li>▪ Large on-chip memories, instruction cache, and DMA controller</li> <li>▪ Peripheral bus for customization</li> </ul>	<ul style="list-style-type: none"> <li>▪ Floating-point, integer and logical 32/40-bit ALU</li> <li>▪ 16-megaword memory space</li> <li>▪ Register-based CPU</li> <li>▪ Flexible, general-purpose instruction set and addressing modes</li> <li>▪ Complete line of support tools</li> <li>▪ High-level language supported</li> </ul>

**APPLICATIONS**

The TMS320 DSP applications are as varied as:

- Telecommunications
- Graphics/image processing
- Instrumentation
- Automotive
- Military
- Voice/speech processing
- Control systems
- Consumer goods
- Medical

## THE TMS320 DIGITAL SIGNAL PROCESSING FAMILY

The TMS320 DSP family currently consists of fifteen compatible high-speed digital signal processors. The devices are designed to increase DSP system performance while reducing total system cost.

### TMS320 DSP FAMILY

	FIRST GENERATION (TMS320C1X)							SECOND-GEN. (TMS320C2X)		THIRD-GEN. (TMS320C3X)
	TMS32010 TMS32010-25 TMS32010-14	TMS320C10 TMS320C10-25	TMS32011	TMS320C15 TMS320C15-25	TMS320E15	TMS320C17 TMS320C17-25	TMS320E17	TMS32020	TMS320C25	TMS320C30*
Data Type 16-Bit Integer 32-Bit Integer or Floating Pt.	Yes —	Yes —	Yes —	Yes —	Yes —	Yes —	Yes —	Yes —	Yes —	Yes Yes
On-Chip (Word) RAM ROM EPROM CACHE	144 1.5K — —	144 1.5K — —	144 1.5K — —	256 4K — —	256 — 4K —	256 4K — —	256 — 4K —	544 0 0 —	544 4K — —	2K 4K — 64
Total Memory Space	4K	4K	1.5K	4K	4K	4K	4K	128K	128K	16M
I/O (# Ports) Parallel Serial DMA	8 × 16 0 —	8 × 16 0 —	6 × 16 2 —	8 × 16 0 —	8 × 16 0 —	6 × 16 2 —	6 × 16 2 —	16 × 16 1 External	16 × 16 1 External	8K × 32 2 Internal/ External
No. of Ext. Interrupts	1	1	1	1	1	1	1	3	3	4
Timer	0	0	1	0	0	1	1	1	1	2
Coprocessor Interface	—	—	—	—	—	Yes	Yes	—	—	—
Multiprocessor Interface	—	—	—	—	—	—	—	Yes	Yes	Yes
No. Auxiliary Registers Stack Level	2 4	2 4	2 4	2 4	2 4	2 4	2 4	5 4	8 8	8 Unlimited
Instructions	60	60	60	60	60	60	60	109	133	112
Repeat Counter	—	—	—	—	—	—	—	Yes	Yes	Yes (block repeats)
Cycle Time (ns)	200 160 280	200 160	200	200 160	200	200 160	200	200	100	60
Multiply/Accumulate (ns)	400 320 560	400 320	400	400 320	400	400 320	400	200	100	60
External Clock Freq. (MHz)	20.5 25.6 14.4	20.5 25.6	20.5	20.5 25.6	20.5	20.5 25.6	20.5	20.5	40	33
Operating Voltage	5	5	5	5	5	5	5	5	5	5
Power Dissipation (mW) @ 5 Volts (Typ)	900 900 900	165 200	900	225 250	300	250 275	325	1200	625	1000
Technology	NMOS	CMOS	NMOS	CMOS	CMOS	CMOS	CMOS	NMOS	CMOS	CMOS
Package Type DIP GB FN	40-Pin	40-Pin 44-Pin	40-Pin	40-Pin 44-Pin	40-Pin	40-Pin 44-Pin	40-Pin	68-Pin	68-Pin 68-Pin	176-Pin
SMJ Military	Yes — —	Yes —	—	Planned —	—	— —	—	Yes	Yes	Planned

\*In development. Contact nearest TI sales office for more information and availability.

---

Other TMS320 family devices include applications oriented devices such as the TMS320SA32 32-kbit/sec ADPCM Transcoder (TMS320C1X-based), and the DSP2400 V.22 bis Modem Chip set (also TMS320C1X-based). The DSP2400 Modem Chip set consists of two devices, the TMS320A2400 DSP and the TMS70A2400 controller devices.

### **TMS320 FAMILY DEVELOPMENT SUPPORT**

Texas Instruments offers an extensive line of support products and documentation to assist the user in all aspects of TMS320 design and development. TMS320 S/W development products include:

- C compilers
- Simulators
- Assembler/linkers
- Application software library
- PC-resident S/W development system (SWDS) for realtime S/W simulation.

TMS320 hardware development products include:

- Evaluation modules (EVM)
- Analog interface board (AIB)
- Full in-circuit emulators (XDS).

A prototype kit is available for evaluation of the DSP2400 modem chip set, and the TMS320 Design Kit is available to aid users in becoming familiar with the TMS320 family. Development support is also available from over 90 third-parties and consultants.

Extensive documentation, including over 700 pages of application reports, newsletters, product bulletins, user's guides and textbooks, is available to support DSP design, research, and education. The TMS320 University program offers assistance to universities in setting up DSP courses and research facilities. TMS320 application assistance is available through the TMS320 hotline (713-274-2320) and bulletin board service (713-272-2323).

TI's Regional Technology Centers (RTC) offer half-day seminars and hands-on workshops on the TMS320 DSPs and development support tools. Three-day hands-on workshops assist users in the development of TMS320-based designs. A half-day seminar provides a quick overview of the TMS320 family.

Table 2 lists TI's TMS320 development tools. Consult the TMS320 Family Development Support Reference Guide (SPRU011) for more detailed information on TMS320 support. Call the nearest TI Field Sales Office for information on price and availability.

**Table 2. TMS320 Development Support Tools**

	<b>TMS320C1X 1st-GENERATION</b>	<b>TMS320C2X 2nd-GENERATION</b>	<b>TMS320C1X/C2X FAMILY MEMBERS</b>
<b>HARDWARE</b>			
Evaluation Module (EVM)	RTC/EVM320A-03	TMDS3268822	
XDS/22 Emulator	TMDS3262211	TMDS3262221	
XDS/22 Upgrade Factory Upgrade Customer Upgrade	TMDS3282215 TMDS3282216	TMDS3282225 TMDS3282226	
XDS/11 Upgrade Factory Upgrade Customer Upgrade		TMDS3281125 TMDS3281126	
Analog Interface Board (AIB)			RTC/EVM320C-06
Programmer Adaptor Socket	RTC/PGM320A-06		
Socket AIB Adapter		RTC/ADP320A-06	
TMS320E15 Starter Kit	RTC/EVM320E-15		
DSP2400 Prototype Kit			TMDS32400PK
TMS320 Design Kit			TMS320DDK
<b>SOFTWARE</b>			
Assembler/Linker VAX VMS PC/MS-DOS	TMDS3240210-08 TMDS3240810-02	TMDS3242210-08 TMDS3242810-02	
Simulator VAX VMS PC/MS-DOS	TMDS3240211 TMDS3240811-02	TMDS3242211-08 TMDS3242811-02	
C Compiler VAX VMS PC/MS-DOS		TMDS3242255-08 TMDS3242855-02	
Software Development System PC/MS-DOS		TMDS3268821	
Digital Filter Design Package (DFDP) PC/MS-DOS			DFDP-IBM002
DSP Software Library VAX VMS PC/MS-DOS			TMDS3240212-18 TMDS3240812-12

Note: Contact your local TI Field Sales Office for part numbers and availability of TMS320 Third-generation development tools. MS-DOS® is a registered trademark of Microsoft Corporation. VAX® and VMS® are registered trademarks of Digital Equipment Corporation. IBM PC® is a registered trademark of International Business Machines Corporation.

---


# TMS340 Graphics Family

## INTRODUCTION

The TMS340 Graphics Product Family offers the broadest range of Graphics-Specific ICs in the industry. TMS340 products satisfy the needs of a wide range of graphics applications with the TMS34010 Graphics System Processor and the TMS34061 Video System Controller. The availability of peripherals like the TMS34070 Color Palette, a complete range of video memory options, and extensive development support tools round out the TMS340 Product Family making TI the undisputed leader in graphics.

4

Processors and Controllers

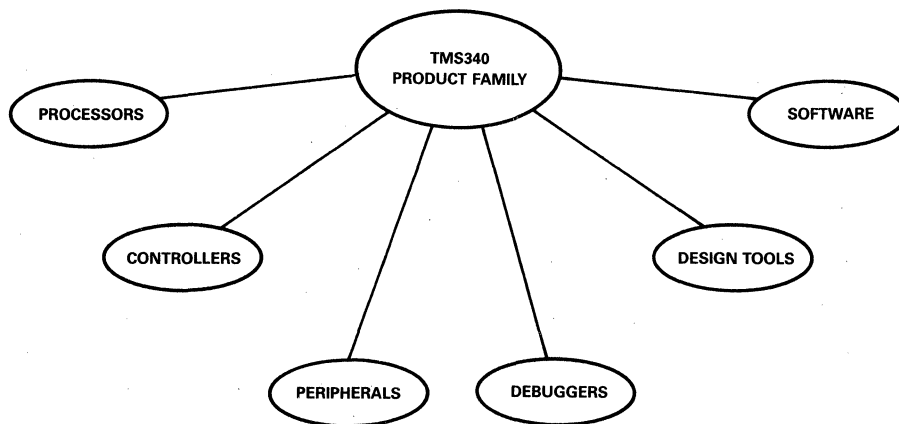

TMS340 Product Family


# TMS34010 Graphics System Processor

## DESCRIPTION

The TMS34010 Graphics System Processor (GSP) is an advanced high-performance CMOS 32-bit micro-processor optimized for graphics display systems. With a built-in instruction cache, the ability to make simultaneous access to memory and registers, and an instruction set designed specifically for raster graphics operation, the TMS34010 provides user-programmable control of the CRT interface as well as the memory interface (both standard DRAM and Multiport Video RAM). The 1-gigabit address space is completely bit-addressable on bit boundaries using variable width data fields (1- to 32-bits). Additional graphics addressing modes support up to 32-bit wide pixels. The TMS34010 is exceptionally well-supported by graphics software interface standards such as CGI/VDI and a full line of hardware and software support tools.

## KEY FEATURES

- 160-ns Instruction Cycle Time
- Fully Programmable 32-Bit General Purpose Processor with 128-Megabyte Address Range
- Pixel Processing, X-Y Addressing, and Window Clip/Pick Built into the Instruction Set
- Programmable Pixel Size with 16 Boolean and 6 Arithmetic Pixel Processing Options (Raster-Ops)
- 31 General Purpose 32-bit Registers
- 256-Byte LRU On-Chip Instruction Cache
- Direct Interfacing to Both Conventional DRAM and Multiport Video RAM
- Dedicated 8-/16-Bit Host Processor Interface and HOLD/HLDA Interface
- Programmable CRT Control (HSYNC, VSYNC, BLANK)
- High-Level Language Support
- Full Line of Hardware and Software Development Tools including a “C” Compiler
- 68-Leaded Packaging (PLCC)
- 5-Volt CMOS Technology

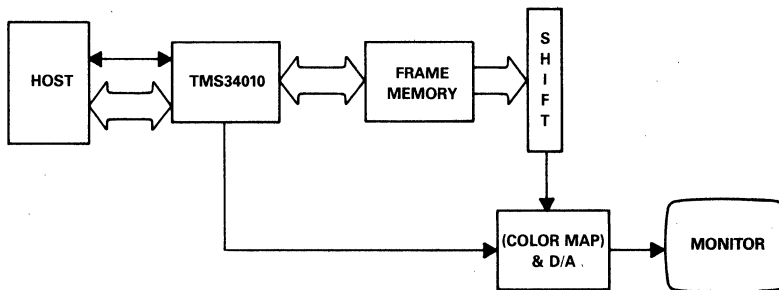

Typical TMS34010 System Block Diagram

The TMS34010 is a CMOS 32-bit processor with hardware support for graphics operations such as PixBlts (raster ops) and curve-drawing algorithms. Also included is a complete set of general purpose instructions with addressing tuned to support high-level languages. In addition to its ability to address a large external memory, the TMS34010 contains 30 general purpose 32-bit registers, a hardware stack pointer and a 256-

byte instruction cache. On-chip functions include 28 programmable registers that contain CRT control, input/output control, and instruction parameters. The TMS34010 directly interfaces to dynamic RAMs and Video RAMs and generates video monitor control signals. It also accommodates a conventional HOLD/HLDA shared access as well as a separate, generalized interface for communicating with any standard host processor.

The TMS34010 has been constructed to provide single-cycle execution of most common integer arithmetic and Boolean operations from its instruction cache. Additionally, the TMS34010 incorporates a hardware barrel shifter that provides a single-cycle bidirectional shift and rotate function for 1- to 32-bits.


A microcoded local memory controller supports pipelined memory write operations of variable-size fields that may be executed in parallel with subsequent instruction execution.

TMS34010 graphics processing hardware supports pixel and pixel-array processing capability for both monochrome and color systems of variable pixel sizes. The hardware incorporates two-operand raster operations with Boolean and arithmetic operations, X-Y addressing, window clipping, window "pick" operations, one to n bits per pixel transforms, transparency, and plane "masking." The architecture further supports operations on single pixels (PixT instructions) or on two-dimensional pixel arrays of arbitrary size (PixBlts).

The TMS34010's flexible graphics processing capability allows software-based graphics algorithms without sacrificing performance. These algorithms include: arbitrary window shapes, custom DDAs (Digital Differential Analyzers), and three operand raster operations.

4

Processors and Controllers

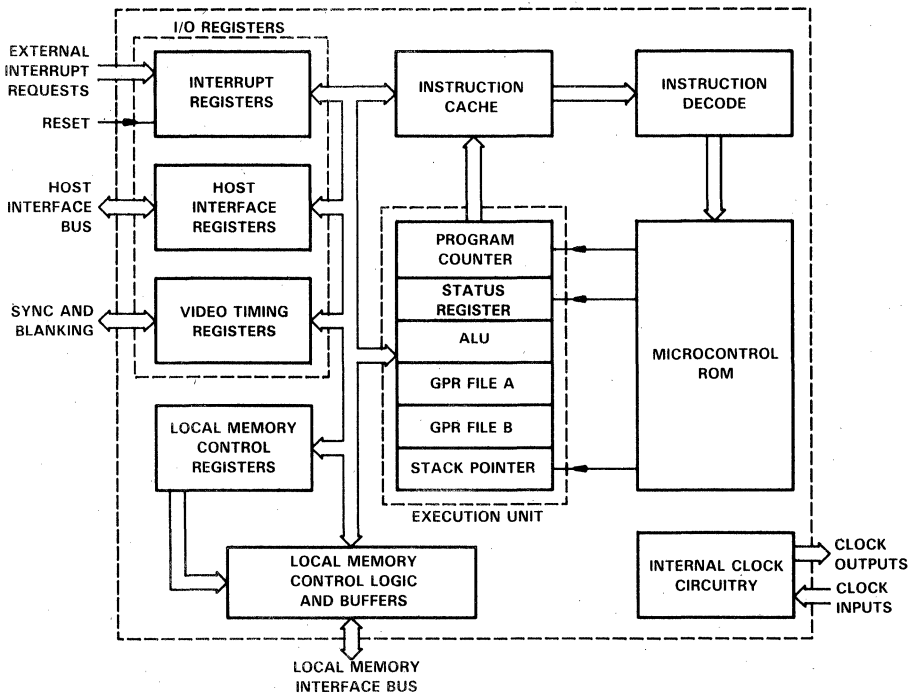

TMS34010 internal Architecture

---

## TMS34061 Video System Controller


The TMS34061 Video System Controller (VSC) is a high-performance NMOS device that controls the video display and the dynamic memory of a bit-mapped graphics system. Although primarily designed to provide control of Multiport Video RAMs (VRAMs), such as the TMS4161 and TMS4461 (see Section 10). The VSC is also compatible with conventional 64K and 256K DRAMs and easily configures to a variety of CPUs. The sync and blanking signals necessary to interface to a raster-scan CRT display are generated by the VSC, which is the only controller currently available that combines VRAM, DRAM, and CRT control on a single chip.

The principle role of the VSC is to provide an external processor with virtually unlimited access to video memory, eliminating delays caused by conflicts with display update functions. Using the VSC, the system CPU is relieved of the burden of controlling the system memory, refreshing video memory, and reloading VRAM internal shift registers for bit-mapped displays. The VSC supports a broad range of raster-scan display systems with various resolutions and scan rates.

### KEY FUNCTIONS

- Generates all control signals necessary to control VRAM devices, as well as those necessary to control conventional 64K and 256K DRAMs.
- Generates the video synchronization and blanking signals necessary to control a CRT monitor.
- Accommodates processor data paths of arbitrary width. The VSC works equally well with 8-, 16-, 20-, and 32-bit processors.
- Supports both interlaced and non-interlaced displays of essentially any display resolution (from 256 to greater than 4096 pixels per line).
- Automatically generates the special display-update cycles required by VRAM memories to maintain the CRT display.
- X-Y indirect addressing improves the performance of graphics primitives as well as supporting host processors with limited addressing range.
- Automatically performs periodic DRAM refresh cycles necessary to maintain data stored in the VRAMs, as well as in conventional 64K and 256K DRAMs.
- Universally programmable interface and READY/WAIT logic provides for efficient communication with all leading microprocessors as well as high-speed bit-slice processors.



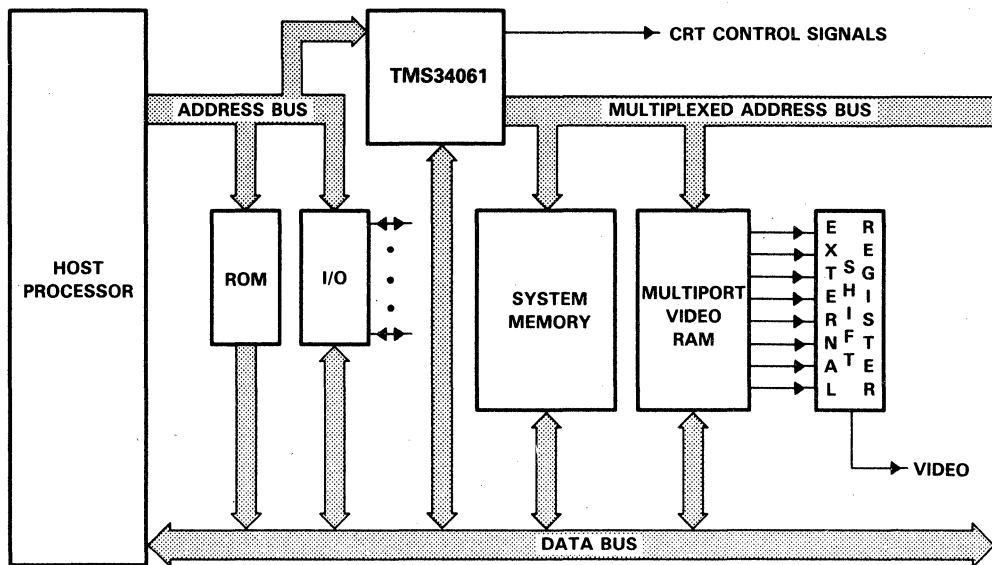


Typical TMS34061 System Block Diagram

# TMS34070 Color Palette

The TMS34070 Color Palette is a monolithic integrated circuit containing a color lookup table and providing three channels of analog video output for RGB-type CRT monitors operating at frequencies up to 66 MHz. This corresponds to a display resolution of about 1024 by 760 pixels, assuming a non-interlaced display refreshed at 60 Hz. The TMS34070 supports graphics systems having up to four color planes and allows 16 of 4096 different colors per line to be displayed simultaneously on the CRT monitor.

## KEY FEATURES

- Three 4-bit Video-DAC outputs are capable of directly driving 75-Ω monitor cables.
- Sixteen 14-bit color lookup registers support the simultaneous display of a palette of 16 colors selected from an available 4096 colors.
- Color lookup table can be automatically loaded with a new set of colors prior to the start of each horizontal scan line without processor intervention.
- Device is versatile and can be used with a variety of controllers and memory types.
- Real-time animation is supported by the REP attribute bit, which facilitates rapid rendering of scenes composed of polygons of various solid colors.
- Video overlay capability is supported by the EXT attribute bit, which is used to control external circuitry.
- Internal pipelining makes possible shorter setup and hold times at the digital data inputs and faster transitions at the analog outputs.
- Worst-case transition time for the Video-DAC outputs is 10 ns.
- Internal multiplexing permits digital data to be input at half the rate at which analog data is output at the Video-DAC pins allowing inexpensive TTL shift registers to be used.
- Analog RGB video data is output from the Video-DAC pins at dot frequencies up to 66 MHz.
- Digital input and output logic levels are TTL-compatible.
- Separate 5-volt power supply pins are provided for digital and analog functions.
- Device is available in a 22-pin, 400-mil plastic dual-in-line package.

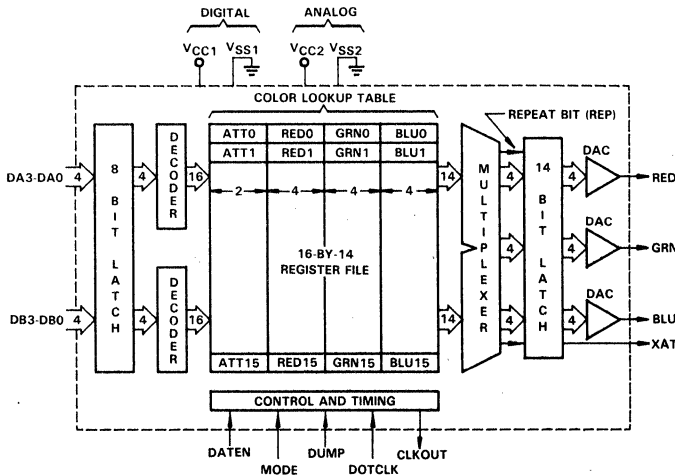

TMS34070 Block Diagram

## TMS340 Family Hardware and Software Support

A full range of hardware and software development tools are available for TI's new TMS34010 graphics processor. Key tools are based on IBM PC®, TI Professional, or VAX™ computers. TI's Regional Technology Centers can provide additional support.

### TMS340 FAMILY SILICON:

▪ GRAPHICS SYSTEM PROCESSOR (40 MHz)	TMS34010FNL-40
▪ GRAPHICS SYSTEM PROCESSOR (50 MHz)	TMS34010FNL-50
▪ VIDEO SYSTEM CONTROLLER (10 MHz)	TMS34061FNL
▪ VIDEO SYSTEM CONTROLLER (12.5 MHz)	TMS34061FNL-12
▪ COLOR PALETTE (20 MHz)	TMS34070NL
▪ COLOR PALETTE (36 MHz)	TMS34070NL
▪ COLOR PALETTE (66 MHz)	TMS34070NL-66

## 4

### Processors and Controllers

### TMS340 FAMILY HARDWARE TOOLS:

▪ TMS34010 XDS-22 REAL-TIME EMULATOR (U.S.)	TMDS3469910000
▪ TMS34010 XDS-22 REAL-TIME EMULATOR (EUROPE)	TMDS3469981000
▪ TMS34061 COLOR GRAPHICS CONTROLLER BOARD	TMDS3471804000
▪ TMS34010 SOFTWARE DEVELOPMENT BOARD	TMDS3411804420
▪ TMS340 GRAPHICS DESIGN KIT	TMS340GDK
▪ TMS34010 GRAPHICS DESIGN KIT	TMS34010GDK

### TMS34010 PC SOFTWARE TOOLS:

▪ ASSEMBLER PACKAGE, MS-DOS 2.11 +	TMDS3440808002
▪ 'C' COMPILER PACKAGE, MS-DOS 2.11 +	TMDS3440805002
▪ GRAPHICS/MATH FUNCTION LIBRARY	TMDS3440802202
▪ FONT LIBRARY	TMDS3440802302
▪ DEBUGGER DEVELOPMENT PACKAGE (FOR INTERNAL USE)	TMDS3440806002
▪ DEBUGGER DEVELOPMENT PACKAGE (FOR RESALE)	TMDS3440806003

### TMS34010 VAX SOFTWARE TOOLS:

▪ ASSEMBLER PACKAGE, VMSTM	TMDS3440200059
▪ ASSEMBLER PACKAGE, DEC ULTRIX™	TMDS3440200069
▪ ASSEMBLER PACKAGE, UNIX SYSTEM V	TMDS3440200089
▪ 'C' COMPILER PACKAGE, VMS	TMDS3440205059
▪ 'C' COMPILER PACKAGE, DEC ULTRIX	TMDS3440205069
▪ 'C' COMPILER PACKAGE, UNIX SYSTEM V	TMDS3440205089
▪ GRAPHICS/MATH FUNCTION LIBRARY	TMDS3440202208
▪ FONT LIBRARY	TMDS3440202308

---

# TMS34010 XDS/22 Emulator

## KEY FEATURES


### Stand-Alone Terminal

- Full-speed in-circuit emulation
- Host independent
- Full-speed hardware trace
- Multimode hardware single step/breakpoint

### PC Debugger Software

- Powerful debug environment:
  - Run/stop/single step
  - Set breakpoint/trace
  - Environment save/restore
  - Machine state manipulation
  - Reverse assembly
- Screen-oriented display/single image of machine
- Line-oriented input

Complete and self-contained, TI's TMS34010 XDS/22 Emulator is a user-friendly system for realtime, in-circuit emulation. The emulator may be used in a stand-alone mode through a standard terminal or through a host computer with a powerful debugger interface. The emulator has 128K x 16 words of DRAM (zero wait states) for program memory.

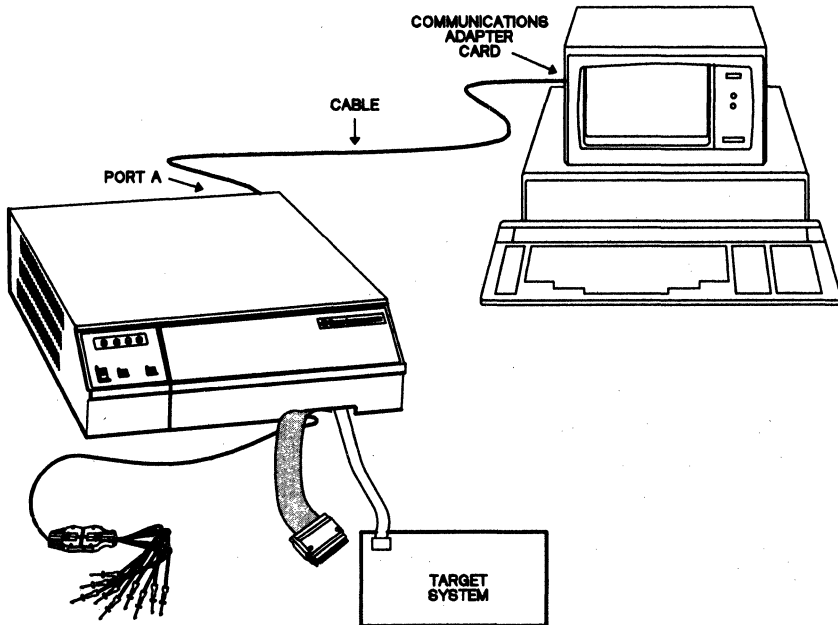

# TMS34010 Software Development Board


An easy way to evaluate the power and flexibility of TI's new TMS34010 Graphics System Processor is provided by the TMS34010 Software Development Board (SDB). It is a single-slot, plug-in board populated with TI's GSP, Color Palette, and VRAMS. Large program memory allows execution of graphics software standards as well as user-supplied programs.

## KEY FEATURES

- Plugs into IBM PC-compatible and TI Professional computers
- 256K bytes of display memory organized as 1,024 x 512 x 4 using TMS4161 VRAMs
- 4,096 colors available per screen, 16 colors per line, using TMS34070 Color Palette
- Analog or digital RGB output
- 512K bytes of TMS34010 program memory using TMS4256 256K-bit DRAM
- Mouse interface/serial port supported on board
- Debugger interface software

4

Processors and Controllers

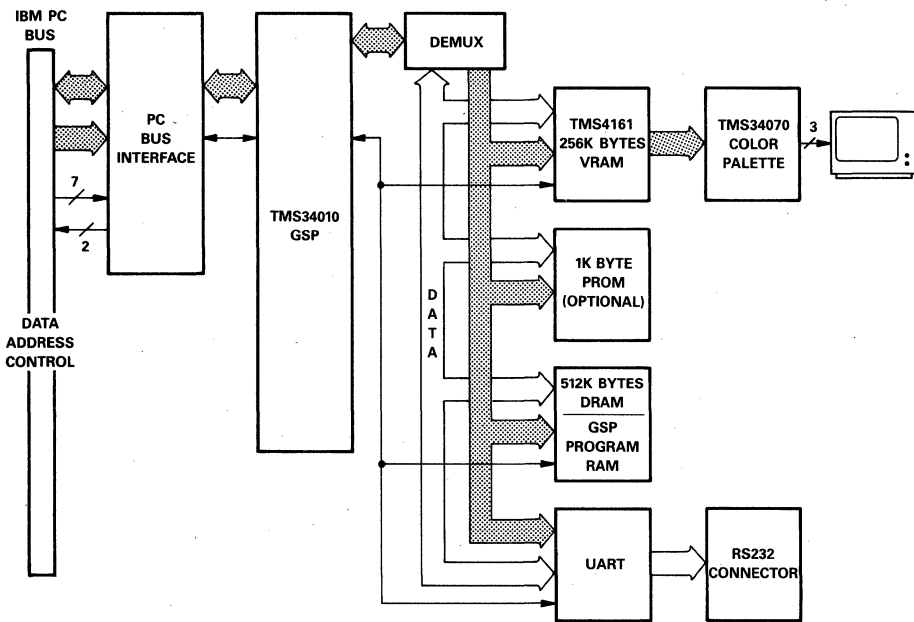


TMS34010 Software Development Board

# Color Graphics Controller Board

Fast checkout of the resolution and quality of TI's TMS34061 Video System Controller and TMS34070 Color Palette in controlling text and graphics is provided by TI's TMS340 Color Graphics Controller Board. It also demonstrates ease of hardware design.

## KEY FEATURES

- 256K-byte frame buffer (1,024 x 512 pixels, 4-bits per pixel)
- Direct interface to most digital and analog RGB monitors
- Totally programmable resolution (640 x 480 pixels as shipped)
- IBM and TI PC I/O expansion bus compatible
- 16 of 4,096 colors per line color palette
- Palette can be loaded on a line or frame basis under software control

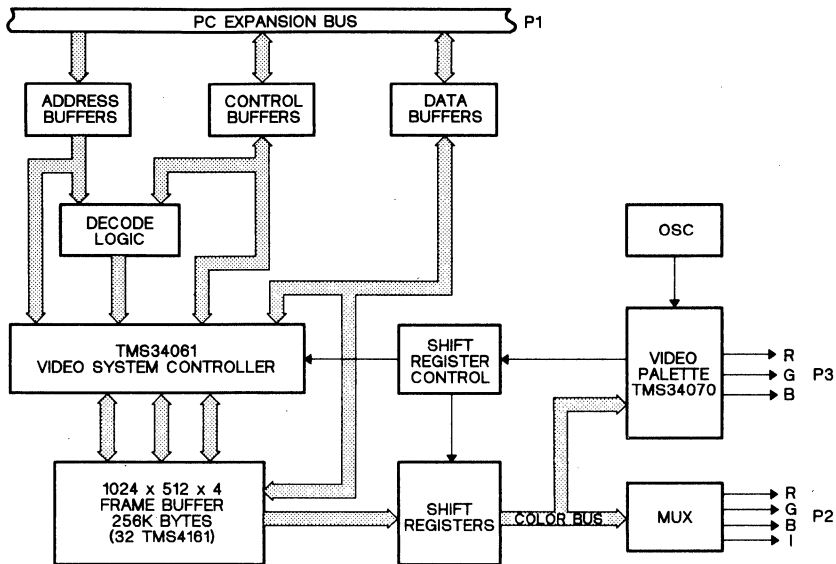

**Color Graphics Controller Board Block Diagram**

---

# TMS34010 DEVELOPMENT SOFTWARE

Immediately available to speed graphics system design and development is this exceptionally broad software family supporting TI's TMS34010 Graphics System Processor. Included is a Kernighan and Ritchie standard 'C' Compiler Package, Assembler Package, Graphics/Math Function Library, Bit-Map Font Library, and PC Debugger Development Package.

## KEY FEATURES

### Compiler Package

- Full Kernighan and Ritchie 'C' with extensions (in-line assembly code, enumerated data type)
- 64-bit IEEE (without implied 1) floating point
- Three-pass optimizing preprocessor, parser, code generator generating TMS34010 assembly source
- Floating-point and memory-management run-time support
- Supports symbolic/statement-level debug
- Assembly linkable

### Assembler Package

- COFF (Common Object File Format) section-oriented object code
- Macro assembler/linker supporting packed bit fields, cache alignment, symbol cross-referencing, and output control
- Screen-oriented software debugger (GSPSIM) with breakpoint/trace, instruction execution, input redirection, environment save/restore, on-line help utility
- Source/object archiver
- ROM utility for ROM/PROM/EPROM programming

### Graphics/Math Function Library


- Graphics primitives
- Transcendental functions (double-precision floating point)
- Matrix operations (3D transforms)
- Text and font functions
- View port support
- Palette management

### Bit-Map Font Library

- 19 different font styles
- Over 100 total fonts
- Pixel heights from 7 to 82

### PC Debugger Development Package

- Main program is executable object code
- Driver code is customizable source

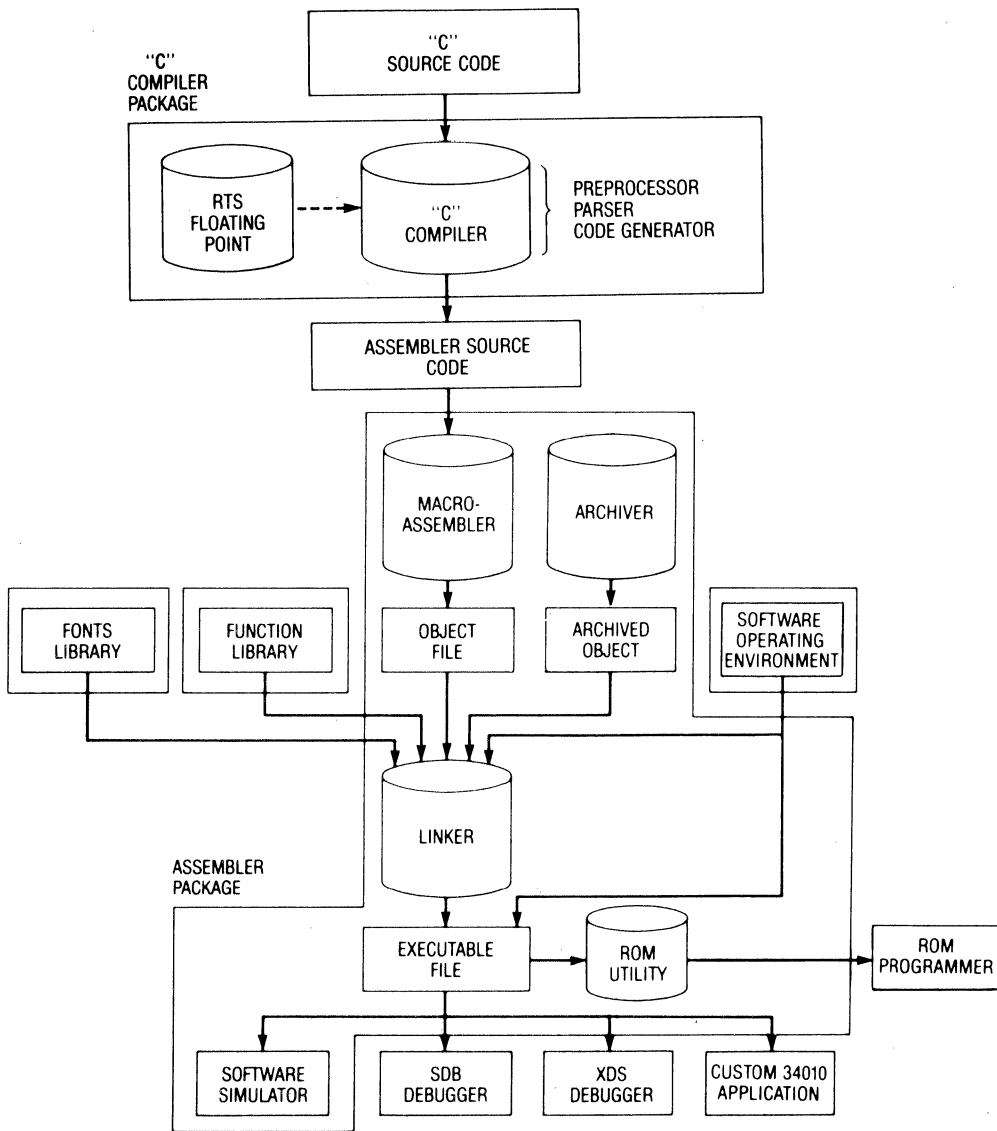

TMS34010 Software Development Tools



# TMS380 LAN Adapter Chipset

## INTRODUCTION


The Texas Instruments TMS380 LAN adapter chipset was developed jointly with IBM™ and provides manufacturers of computer, peripheral, and telecommunication equipment with a verified chipset for connecting to the IBM Token-Ring Network.

## Overview

The TMS380 chipset uses a token-passing access technology compatible with the IEEE 802.5 standard. The chipset provides a 4-megabit-per-second data expressway using twisted-pair wire or fiber optic media. The integrated LAN adapter architecture of the TMS380 ensures connectivity to the IBM Token-Ring Network by providing all the functions needed to connect an attaching product's host processor bus to the physical media. High reliability of the network is provided via dedicated error checker circuits, on-chip diagnostic and error monitoring software, and other network-management features.

## 4 Standard LAN Adapter Architecture

Through the use of advanced VLSI NMOS and bipolar processes, Texas Instruments reduced the essential building blocks of an IEEE 802.5 Media Access Control (MAC) level LAN adapter card into the five-piece chipset shown below.

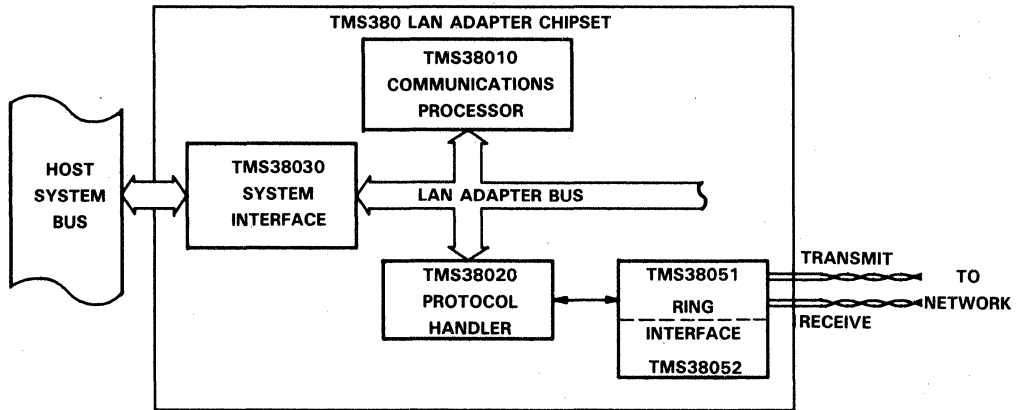

Integrated Adapter Architecture

Following is some additional information for each member of the TMS380 chipset. For detailed information on the TMS380 chipset, please refer to the *TMS380 Adapter Chipset User's Guide* (SPWU001D).

---

## The System Interface

The TMS38030 System Interface (SIF) chip provides up to 40 megabits-per-second of data to the host system via DMA bus master transfers. The host system bus interface is selectable for two types of memory organization and control signals:

- 8-, 16-, and 32-bit members of the 808X and Series 32000 microprocessor families
- 16- and 32-bit members of the 68000 microprocessor family

The System Interface is controlled through command blocks with a high-level command structure; for example, commands include TRANSMIT, RECEIVE, and READ ERROR LOG. The System Interface has a 24-bit address reach into the host memory and a “scatter write-gather read” DMA feature that allows discontinuous memory blocks to be transferred and received via linked lists. Programmable burst transfers or cycle-steal operation and optional parity protection allow system designers to customize the TMS38030 to their particular bus.

## The Communications Processor

The TMS38010 Communications Processor (CP) contains a dedicated 16-bit CPU with 2.75K bytes of on-chip RAM. The Communications Processor executes the Medium Access Control (MAC) and Logical Link Control (LLC) protocols of the token ring. The on-chip RAM buffers the frames being transmitted and received. This high-performance CPU provides single-cycle arbitration of the 3 MHz LAN adapter bus for maximum adapter throughput. Up to 104K of expansion memory can be added to the LAN adapter bus. All on-chip RAM and expansion memory is parity protected.

## The Protocol Handler

The TMS38020 Protocol Handler (PH) performs hardware-based protocol functions for a 4-megabit-per-second token ring LAN compatible with the IEEE 802.5 standard. An on-chip ROM contains 16K bytes of adapter software executed by the Communications Processor. This software supports reliable ring operation, LAN management services, and thorough diagnostic coverage of the adapter chipset.

The Protocol Handler implements differential Manchester encoding and decoding and frame-address recognition (group, specific, and functional). The Protocol Handler also contains state machines that capture free tokens, transmit and receive frames, manage the adapter chipset buffer RAM, and provide token-priority controls.

Four DMA channels, two for transmit and two for receive, ensure high-speed frame transfer between the ring and the adapter's buffer RAM. Integrity of transmitted and received data is assured by cyclic redundancy checks (CRC), detection of differential Manchester code violations, and parity on internal data paths. All data paths and registers are parity-protected to assure functional integrity.

The TMS38021 Protocol Handler, in addition to the functions mentioned above, enables the design of high-performance token-ring bridge and gateway products.

## The Ring Interface

The TMS38051 and TMS38052, collectively the Ring Interface, are the Ring Interface Transceiver and Ring Interface Controller. These chips contain the digital and analog circuitry to connect the adapter chipset to a 4-megabit-per-second token ring LAN through separate receive and transmit channels.

The Ring Interface provides the clock for the ring when in active monitor mode and contains a phase lock loop for clock recovery, data detection, and phase alignment. The Ring Interface also provides the phantom drive signal to a wiring concentrator, a loop-back path for diagnostic testing and error detection of wire faults.

### TMS380 Chip Technology


DEVICE	TECHNOLOGY	POWER	CHIP SIZE (k sq mils)	PACKAGE
TMS38030 System Interface	2.4 $\mu$ m NMOS	950 mW	108	100 PGA
TMS38010 Communications Processor	2.4 $\mu$ m NMOS	750 mW	119	48 DIP
TMS38020 Protocol Handler	2.4 $\mu$ m NMOS	550 mW	108	48 DIP
TMS38051 Ring Interface Transceiver	LLS-TTL	350 mW	27	22 DIP
TMS38052 Ring Interface Controller	LLS-TTL	200 mW	13	20 DIP

## 4

### Expanded LAN Adapter Architecture

In order to implement an add-in card token ring adapter, additional bus interface circuitry is required. Also, in order to implement an expanded capacity MAC level adapter or expanded function IEEE 802.2 Logical Link Control (LLC) level adapter, memory expansion circuitry is required.

Following is an implementation block diagram of an expanded-function token ring adapter card using the TMS380 chipset. Note the additional logic to interface to the PC bus and expansion memory.

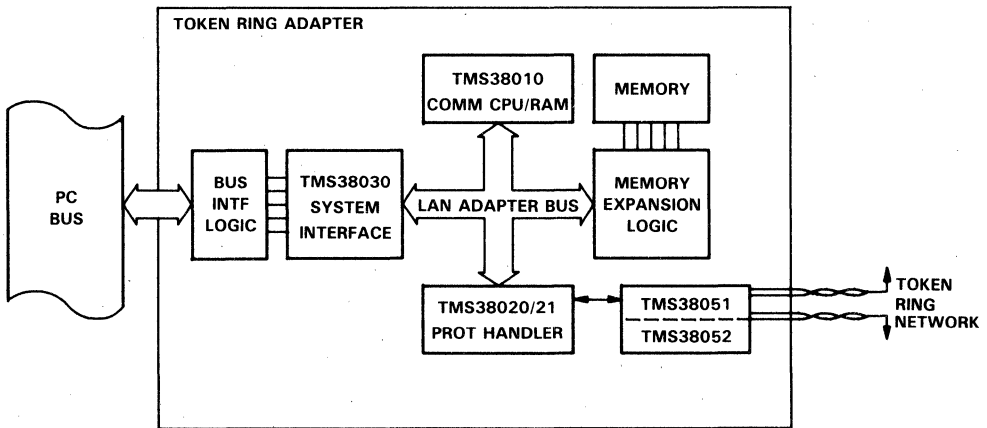


Expanded Token Ring Adapter Block Diagram

## ASIC-LAN Toolkit

By using the TMS380 ASIC-LAN Toolkit, all the interface logic surrounding the TMS380 chipset is collected into soft macro building blocks which can be assembled into ASIC components for host bus interface and memory expansion on the LAN Adapter Bus. These two ASICs dramatically reduce the amount of required board space and allow for easy migration to a fully functional half-sized adapter complete with expansion memory.

The following illustration shows a complete, full function token ring adapter card using DRAM memory expansion and a PC Family host interface. Note the component count savings and board area reduction.

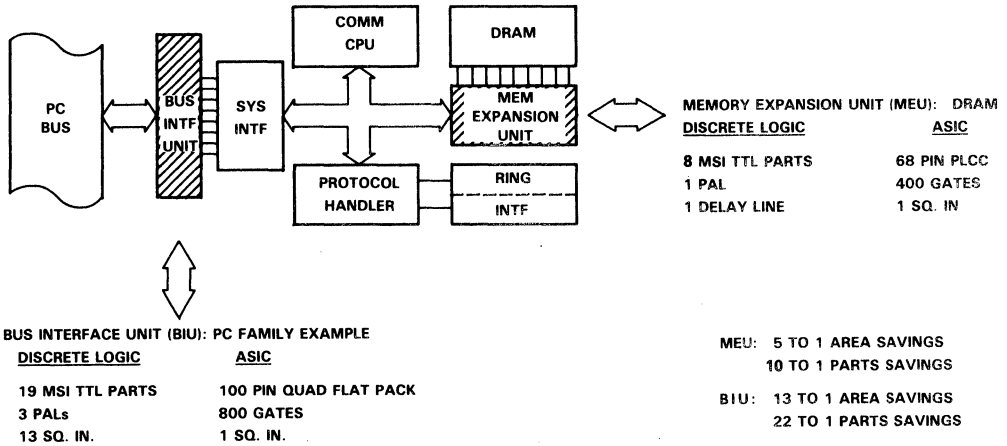


### TMS380 ASIC-LAN Toolkit Adapter Compression Example

The library of soft macros contained in the Toolkit allows you to construct your own ASIC interface chips — or, you can select one of the pre-captured and pre-simulated design examples without requiring modifications.

### IEEE 802.2 Logical Link Control

Several of the MEU software macros can be combined to build an ASIC which supports the addition of IEEE 802.2 Logical Link Control (LLC) on the TMS380 LAN adapter. By offering this capability on-chip, TMS380 users can enjoy improved system performance, reduced development cost, and robust open system operation compatible with IBM's networking products. The LLC software is supported in EPROM or on Floppy for download into DRAM. With IEEE 802.2 on the TMS380, the LAN adapter protocols are independent of the attached product and operating system. This allows the TMS380 to be used across multiple product lines with many different operating systems such as DOS, UNIX and VM, and provides a link to popular off-the-shelf communications protocols.

**OFF-THE-SHELF SOFTWARE:**

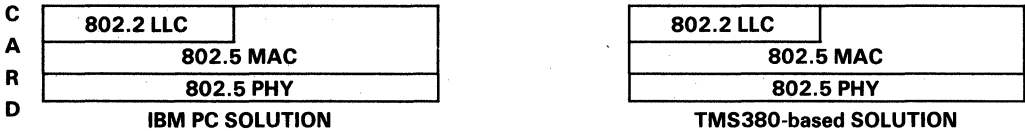

4

Processors and Controllers

**Using Off-the-Shelf Software**

**TMS380 Customer Support**

Texas Instruments, the leader in token ring chipsets, is committed to helping you achieve effective product designs in a quick, efficient manner. Consequently, the TMS380 Token Ring chipset is fully supported with documentation, technical training, development tools, and applications engineering available through Texas Instruments sales offices.

**Documentation**

The TMS380 Token Ring chipset offers you extensive information at the introductory/overview level, as well as detailed technical data specifications. The introductory information provides concise information to quickly build your awareness of the TMS380 chipset and token ring networks. Available documents include:

- Texas Instruments — The Token Ring Connection (SPWM011)
- Token-Ring LAN — TMS380 Development Products Family (SPWB001)
- Texas Instruments Token-Ring LAN Adapter Family Product Bulletin (SPWT018A)

Thorough technical data sheets and applications information on the TMS380 Token Ring LAN Adapter chipset leave no details unspecified. Available documents include:

- TMS380 LAN Adapter Chipset User's Guide (SPWU001D)
- TMS380 LAN Adapter Chipset User's Guide Supplement (SPWU003)
- TMS380 Development Product Family User's Guide
- A collection of technical papers on token ring presented by Texas Instruments technical experts

---

## Token Ring Training

To quickly familiarize your decision makers and ramp up your design team with state of the art information on token ring, Texas Instruments offers a distinguished array of training including:

- A free half-day seminar designed to introduce networking, as well as features of the TMS380 token ring adapter chipset. It is available at TI's Regional Technology Centers (RTCs).
- A two-day workshop on "IBM Token-Ring Network Design" (RTCWS-380LAN1) is offered by TI's RTCs. This is targeted at hardware adapter card designers and provides them with an understanding of how to interface the TMS380 chipset to popular host microprocessors, backplane buses, and operating systems.
- A TMS380 Advanced Topics Workshop (RTCWS-380LAN2) is also offered by TI's RTCs. This course introduces the software designer to two advanced features of the TMS380 Token Ring Adapter family — the extended Logical Link Control protocol software interface, and the application of the TMS380 family to bridging products.

## Development Support Products

Texas Instruments provides leadership development tools to accelerate your token ring product design, including:

- **DESIGN-IN ACCELERATOR KIT (TMS380LDK-1)** — The DIA kit is targeted at the hardware engineer involved in adapter card design and debug. Included in the kit are three TMS380 chipsets, a TMS380 Adapter Chipset User's Guide, Adapter Debug Software (ADS) to help debug prototype cards, and the TMS380 Adapter Bring-Up Guide.
- **PC ADAPTER CARD (TMDS380PC)** — This 4 or 16-bit compatible product is aimed at the software engineer who wants to prototype a token ring and begin software development and system evaluation. Included with the card are: two 8-foot ring cables, demonstration software, a traffic generator option, and a copy-all-frames function for network analysis. The development card now features IEEE 802.2 LLC software, and includes a copy of the new IBM LAN Support Program.
- **TEST WIRING CONCENTRATOR (TMD380TWC-1)** — Provides the physical connection of up to eight devices to the token ring.
- **TMS380 BRIDGE DESIGN KIT (TMDX380BMP)** — This package is aimed at customers who want to build a token ring bridge product or are interested in building network management equipment. Included in the kit are: one TMX38021 Protocol Handler, the TMS38021 Bridge Application Report, and the new bridge options adapter software.
- **TMS380 LLC EVALUATION KIT (TMDS380LLC)** — This is for customers who purchased TI's development cards or who have designed their own hardware and wish to evaluate TI's new TMS380-based IEEE 802.2 LOGICAL LINK CONTROL (LLC) software. Included in the kit are: three sample sets of LLC software, the TMS380 Adapter Chipset User's Guide Supplement, Adapter Handler Emulator software, and Adapter Debug Software.
- **TMS380 ASIC-LAN TOOLKIT (TMDP380ASIC)** — This package will assist you in designing an Application Specific IC (ASIC) tailored specifically for the TMS380 LAN chipset. Included in the kit is the ASIC-LAN manual, a set of 8-inch floppy disks containing the library of LAN software macros, detailed data sheets covering more than 30 cell types, and several ASIC-LAN design examples of host system bus interfaces, as well as memory expansion examples.

---

## **Applications Engineering Support**

Texas Instruments' commitment to customer support goes even further by providing you extensive token ring application engineering support, including:


- Regional Technology Centers (RTCs) and ASIC Design Centers with trained engineers for ASIC development support.
- Factory Applications Engineering with industry-leading expertise in all phases of token ring network and TMS380 applications.
- TMS380 Token Ring Hotline (713) 274-2380. A direct line to TI's factory token ring applications engineering for quick answers to any TMS380 application question.

# 8-BIT MICROCOMPUTERS — TMS7000 FAMILY

## DESCRIPTION

The TMS7000 is a family of 8-bit single-chip microcomputers. These microcomputers incorporate a CPU, memory (RAM, ROM, EPROM), bit I/O, serial communication port, timers, interrupts, and external bus interface logic, all on a single-chip. The products are available in varying complexity of functions, process technology, performance, and packaging to meet end equipment cost goals and application requirements.

## FUNCTIONAL BLOCK DIAGRAM

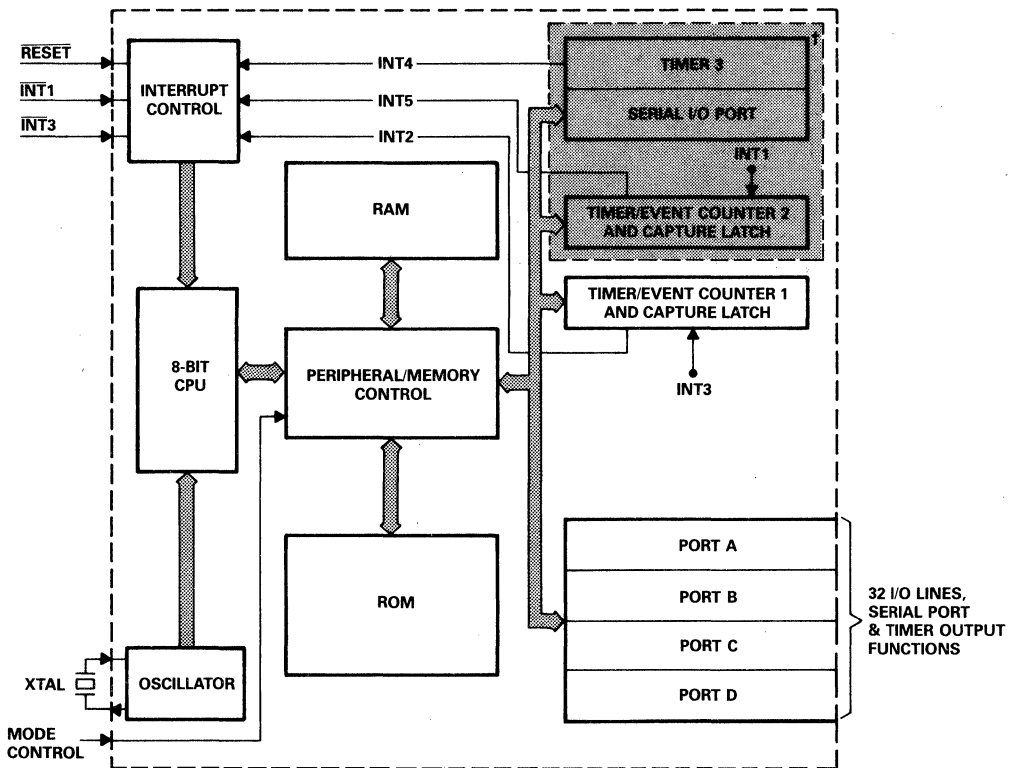

† Timer 3, serial port, and timer/event counter 2 available for TMS70Cx2 devices only



## TMS7000 FAMILY



TMS7000 FAMILY			
DESCRIPTION	TMS70C00A TMS70C20A TMS70C40A	TMS70C02 TMS70C42	TMS77C82
Max. Oscillator Frequency (5V ± 10%)	5 MHz	6 MHz	7.5 MHz
On-Chip ROM (K-Bytes)	0/2/4	0/4	8 (EPROM)
On-Chip RAM (Bytes)	128	256	256
Interrupt Levels:			
External	2	2	2
Total	4	6	6
Timers/Event Counters			
21-Bit	—	2	2
13-Bit	1	—	—
10-Bit	—	1	1
I/O Lines:			
Bidirectional	16	24	24
Output Only	8	8	8
Input Only	8	—	—
Additional Features	—	Serial Port	Serial Port
DEVELOPMENT SUPPORT			
Prototyping			
EPROM	—	TMS77C82	—
Piggyback	SE70CP160	SE70CP162	SE70CP162
XDS®	Yes	Yes	Yes
EVM	Yes	Yes	Yes
Voltage Range	2.5V to 6.0V	2.5V to 6.0V	2.5V to 6.0V
Temperature Range	-40° to 85°C	-40° to 85°C	-40° to 85°C

### DEVELOPMENT SYSTEMS

There are two development systems available for the TMS7000 family of microcomputers, the XDS® and the EVM. The XDS® is a Host independent real-time in-circuit emulator with extensive on-board debug capabilities. The EVM is a low-cost Host independent real-time in-circuit emulator with debug capabilities and EPROM programming utilities.

## XDS® - Extended Development System

- Full TMS7000 Family Development System
- Host Independent/RS-232-C Interface
- Full Speed In-Circuit Emulation
- Extensive Breakpoint and Trace Functions
  - Detailed Timing Analysis
  - 2K-Byte Trace Samples
  - Breakpoint Sequencing Ability
- Command/Default Storage
- Removable Target Connector
- External Probe for Breakpoint/Trace Qualifiers
- On-Board Assembler and Reverse Assembler
- Multiprocessing Capabilities

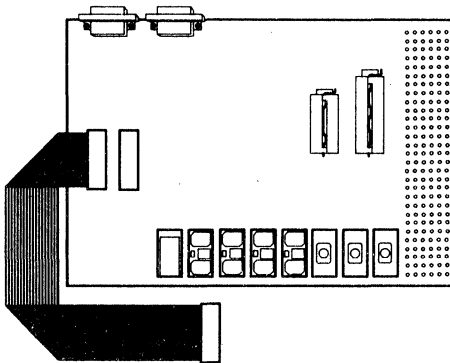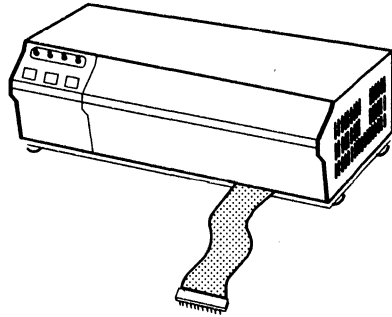

## EVM — Evaluation Module

- TMS7000 Family Low Cost Development System
- Single-Chip Mode Emulation Only
- On-Board Assembler/Line Text Editor
- On-Board Hardware/Software Debugger
- Multiple Breakpoints
- Trace Display Function
- EPROM Programmer Utilities

## ASSEMBLER/LINKER PACKAGE

Crossware® assembler/linker packages are available through Texas Instruments for the following operating systems:

Operating System	TI Part Number
TI and IBM PC	TMDS7040810-02
DEC VAX VMS	TMDS7040210-08

## PROTOTYPING DEVICES

The TMS7000 family contains a wide range of prototyping devices for preproduction and development needs.

## TMS77C82 EPROM DEVICES

These 8-bit EPROM microcomputers are designed for prototyping purposes and applications where program constraints are likely to change periodically. The TMS77C82 contains 8K bytes of on-chip EPROM and is completely software and pin compatible with the TMS70C42.

---

### **SE70CP160 AND SE70CP162 PIGGYBACK DEVICES:**

The Piggyback parts are prototyping devices for the TMS7000 family of microcomputers. These devices are packaged so that a standard '27C64, or '27C128 EPROM can be plugged into the socket on top (piggyback). It is designed to be used in the prototyping environment and is tested and support for that purpose. Texas Instruments does not support or warrant the use of the piggyback parts for production purposes.

---

# HIGH PERFORMANCE VLSI PROCESSORS

## VLSI 8-Bit-Slice Processor Family

### SN54AS887, SN74AS887 8-Bit Processors


#### DESCRIPTION

The 'AS887 8-bit Advanced Schottky TTL integrated circuit is designed to implement high performance digital computers or controllers. An architecture and instruction set has been chosen that supports a fast system clock, a narrow micro-code word width, and a high system throughput. The powerful instruction set allows high-speed system architecture to be implemented and also allows an existing system's performance to be upgraded while protecting software investments. The 'AS887 is a non-cascadable version of the 'AS888 and is designed for 8-bit applications only.

#### KEY FEATURES

- STL-AS Technology
- Parallel 8-Bit ALU with Expansion Inputs and Outputs
- 13 Arithmetic and Logic Functions
- 8 Conditional Shifts (Single and Double Length)
- 4 Instructions that Manipulate Bits
- Add and Subtract Immediate Instructions
- Absolute Value Instruction
- Signed Magnitude to/from Two's Complement Conversion
- Single- and Double-Length Normalize
- Select Functions
- Signed and Unsigned Divides with Overflow Detection; Input does not Need to be Prescaled
- Signed, Mixed, and Unsigned Multiplies
- Three-Operand, 16-Word Register File
- Full Carry Look Ahead Support
- Sign, Carry Out, Overflow, and Zero-Detect Status Capabilities
- Excess-3 BCD Arithmetic
- Internal Shift Multiplexers that Eliminate the Need for External Shift Control Parts
- ALU Bypass Path to Increase Speeds of Multiply, Divide, and Normalize Instructions and to Provide New Instructions such as Bit Set, Bit Reset, and Bit Test
- 3-Operand Register Files to Allow an Operation and a Move Instruction to be Combined
- Bit Masks that are Shared with Register Address Fields to Minimize Control Store Word Width
- 3 Data Input/Output Paths to Maximize Data Throughput

# FUNCTIONAL BLOCK DIAGRAM

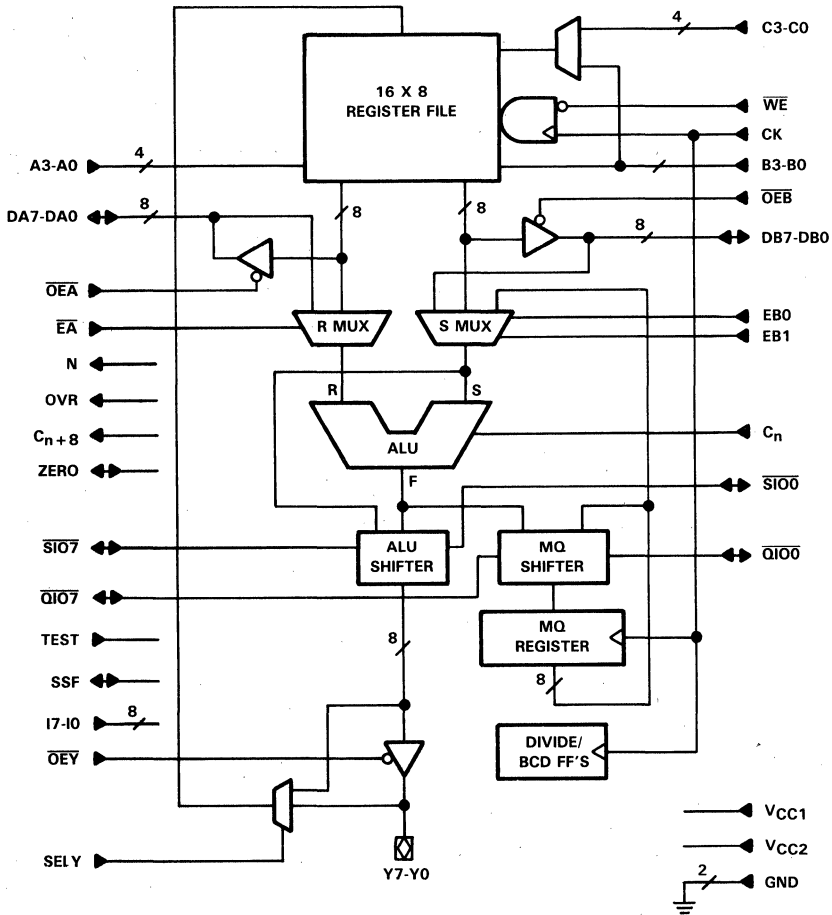

'AS887

4

Processors and Controllers

---

## SN54AS888, SN74AS888 8-Bit Processor Slices

### DESCRIPTION

The 'AS888 8-bit Advanced Schottky TTL integrated circuit is designed to implement high performance digital computers or controllers. An architecture and instruction set has been chosen that supports a fast system clock, a narrow micro-code word width, and a high system throughput. The powerful instruction set allows high-speed system architecture to be implemented and also allows an existing system's performance to be upgraded while protecting software investments. The 'AS888 is designed to be cascadable to any word width 16 bits or greater.


### KEY FEATURES

- STL-AS Technology
- Parallel 8-Bit ALU with Expansion Inputs and Outputs
- 13 Arithmetic and Logic Functions
- 8 Conditional Shifts (Single and Double Length)
- 9 Instructions that Manipulate Bytes
- 4 Instructions that Manipulate Bits
- Add and Subtract Immediate Instructions
- Absolute Value Instruction
- Signed Magnitude to/from Two's Complement Conversion
- Single- and Double-Length Normalize
- Select Functions
- Signed and Unsigned Divides with Overflow Detection; Input does not Need to be Prescaled
- Signed, Mixed, and Unsigned Multiplies
- Three-Operand, 16-Word Register File
- Full Carry Look Ahead Support
- Sign, Carry Out, Overflow, and Zero-Detect Status Capabilities
- Excess-3 BCD Arithmetic
- MQ Register is Externally Available through the DB Port
- Internal Shift Multiplexers that Eliminate the Need for External Shift Control Parts
- ALU Bypass Path to Increase Speeds of Multiply, Divide, and Normalize Instructions and to Provide New Instructions such as Bit Set, Bit Reset, Bit Test, Byte Subtract, Byte Add, and Byte Logical
- 3-Operand Register Files to Allow an Operation and a Move Instruction to be Combined
- Byte Select Controlled by External 3-State Buffers that may be Eliminated if Bit and Byte Manipulation are not Needed
- Bit and Byte Masks that are Shared with Register Address Fields to Minimize Control Store Word Width
- 3 Data Input/Output Paths to Maximize Data Throughput

# FUNCTIONAL BLOCK DIAGRAM

## 4

### Processors and Controllers

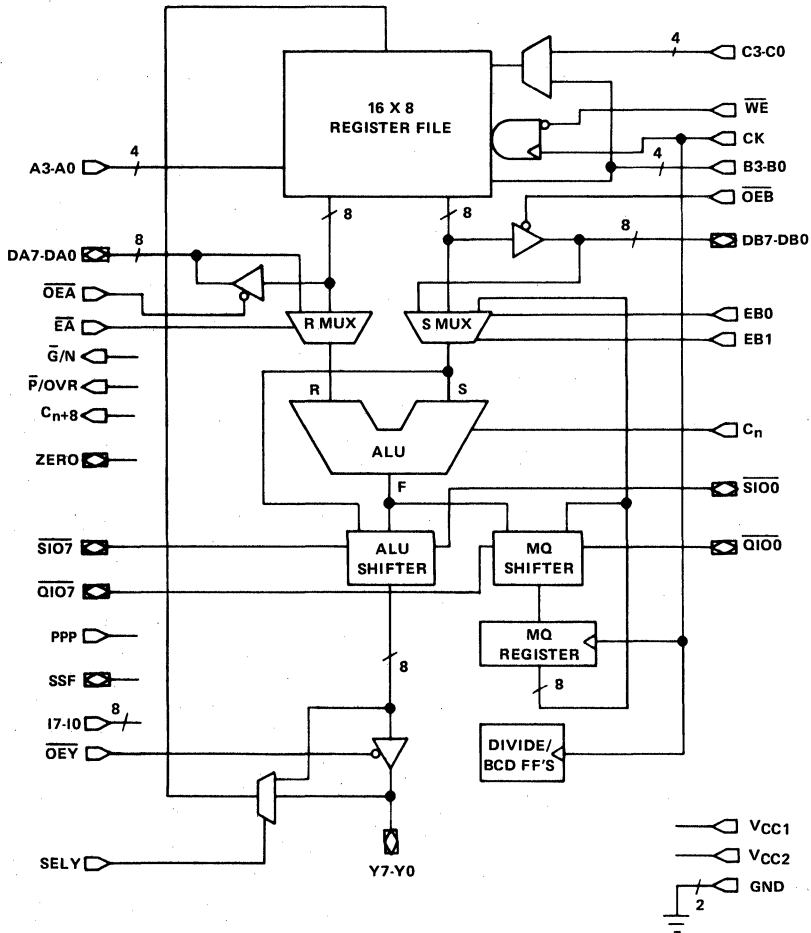

'AS888

## SN54AS890, SN74AS890 Microsequencers


### DESCRIPTION

The 'AS890 is a powerful microsequencer that is the result of the implementation of TI's Advanced Schottky and Schottky Transistor Logic. Approximately 2400 Schottky gate equivalents are used to construct this high-performance sequencer. The 'AS890 can generate an address and provide register status in only 29 ns while typically requiring only 1.8 watts of power. All internal STL logic operates on a 2-volt power supply that must be supplied externally. The information generated by the internal STL logic is communicated in the rest of the system via 5-volt Advanced Schottky TTL-compatible I/O ports.

### KEY FEATURES

- 14 Bits Wide — Addresses up to 16,384 Words of Microcode with One Chip
- Selects Address from One of Eight Sources
- STL-AS Technology
- Independent Read Pointer for Aid in Microcode Diagnostics
- Supports Real-Time Interrupts
- Two Independent Loop Counters
- Supports 64 Powerful Instructions

### FUNCTIONAL BLOCK DIAGRAM

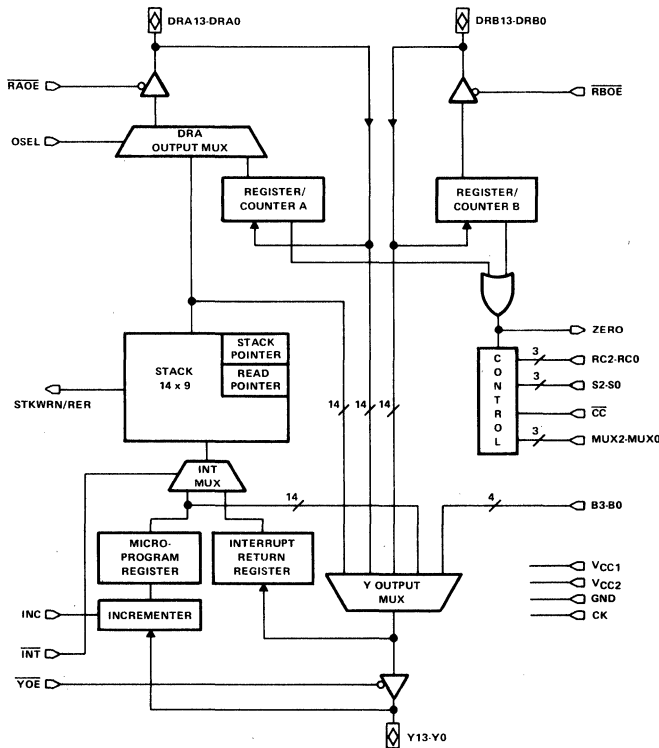

'AS890



---

## SN54AS895, SN74AS895 8-Bit Memory Address Generators


### DESCRIPTION

The 'AS895 8-bit Advanced Schottky TTL integrated circuit is designed to implement high performance digital computers or controllers. An architecture and instruction set has been chosen that supports a fast system clock, a narrow micro-code word width, and a high system throughput. The powerful instruction set allows high-speed system architecture to be implemented and also allows an existing system's performance to be upgraded while protecting software investments. The 'AS895 is designed to be cascadable to any word with 16-bits or greater.

### KEY FEATURES

- STL-AS Technology
- Parallel 8-Bit ALU with Expansion Inputs and Outputs
- 13 Arithmetic and Logic Functions
- 8 Conditional Shifts (Single and Double Length)
- 9 Instructions that Manipulate Bytes
- 4 Instructions that Manipulate Bits
- Add and Subtract Immediate Instructions
- Absolute Value Instruction
- Signed Magnitude to/from Two's Complement Conversion
- Single- and Double-Length Normalize
- Select Functions
- Signed and Unsigned Divides with Overflow Detection; Input does not Need to be Prescaled
- Signed, Mixed, and Unsigned Multiplies
- Three-Operand, 16-Word Register File
- Full Carry Look Ahead Support
- Sign, Carry Out, Overflow, and Zero-Detect Status Capabilities
- Excess-3 BCD Arithmetic
- MQ Register is Externally Available through the DB Port
- Internal Shift Multiplexers that Eliminate the Need for External Shift Control Parts
- ALU Bypass Path to Increase Speeds of Multiply, Divide, and Normalize Instructions and to Provide New Instructions such as Bit Set, Bit Reset, Bit Test, Byte Subtract, Byte Add, and Byte Logical
- 3-Operand Register Files to Allow an Operation and a Move Instruction to be Combined
- Byte Select Controlled by External 3-State Buffers that may be Eliminated if Bit and Byte Manipulation are not Needed
- Bit and Byte Masks that are Shared with Register Address Fields to Minimize Control Store Word Width
- 3 Data Input/Output Paths to Maximize Data Throughput

# FUNCTIONAL BLOCK DIAGRAM

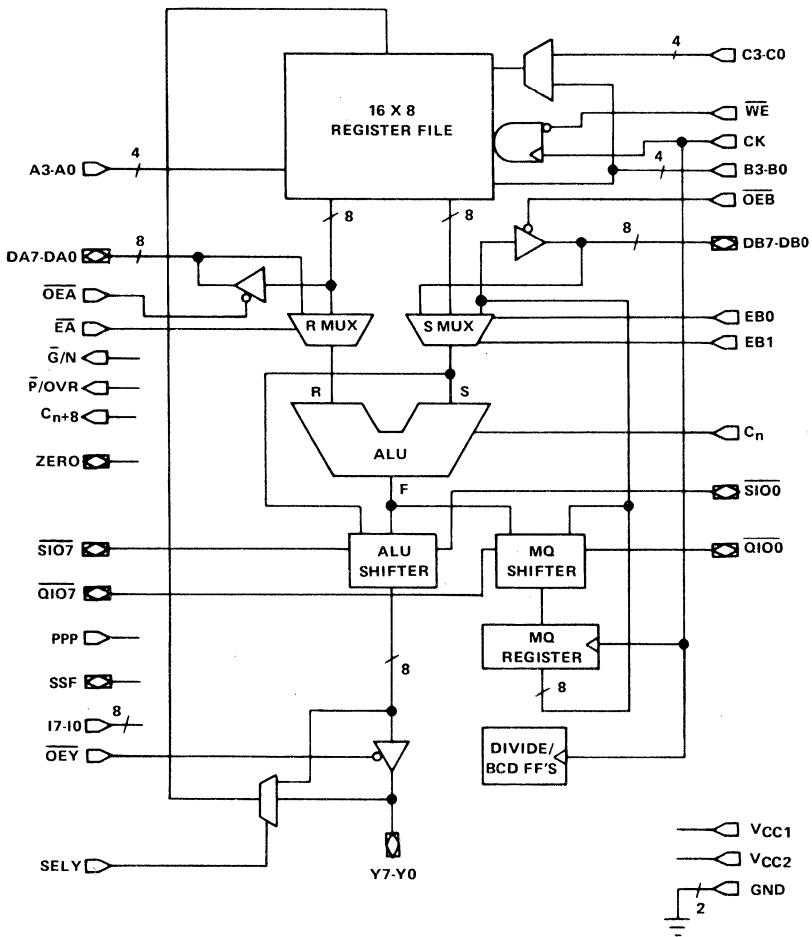

'AS895

---

## SN54AS897A, SN74AS897A 16-Bit Parallel/Serial Barrel Shifters

### DESCRIPTION

The 'AS897A is a multipurpose 16-bit barrel shifter in a 68-pin ceramic pin-grid-array package. The device is capable of several different types of shift operations, as well as other more specialized functions such as hexadecimal and binary normalization, bit replacement, and leading-zero detection.

The unique feature of all barrel shifters is how the shift function is implemented. In conventional shift registers, shift operations are controlled by the number of input clock pulses applied. With barrel shifters, the desired number of positions to be shifted is determined by an input decoder. This form of implementation does not require an input clock and results in a shift operation that is restricted only by internal propagation delays. This delay is the same regardless of the number of positions to be shifted. The result is a high-speed 'flash' type of shift.


### KEY FEATURES

- High-Speed "Flash" Shift Operations
- Expandable to 32-Bits
- Hexadecimal and Binary Normalization with Leading Zero Detection
- Bit Reversal
- Merge Capabilities

4

Processors and Controllers

# FUNCTIONAL BLOCK DIAGRAM

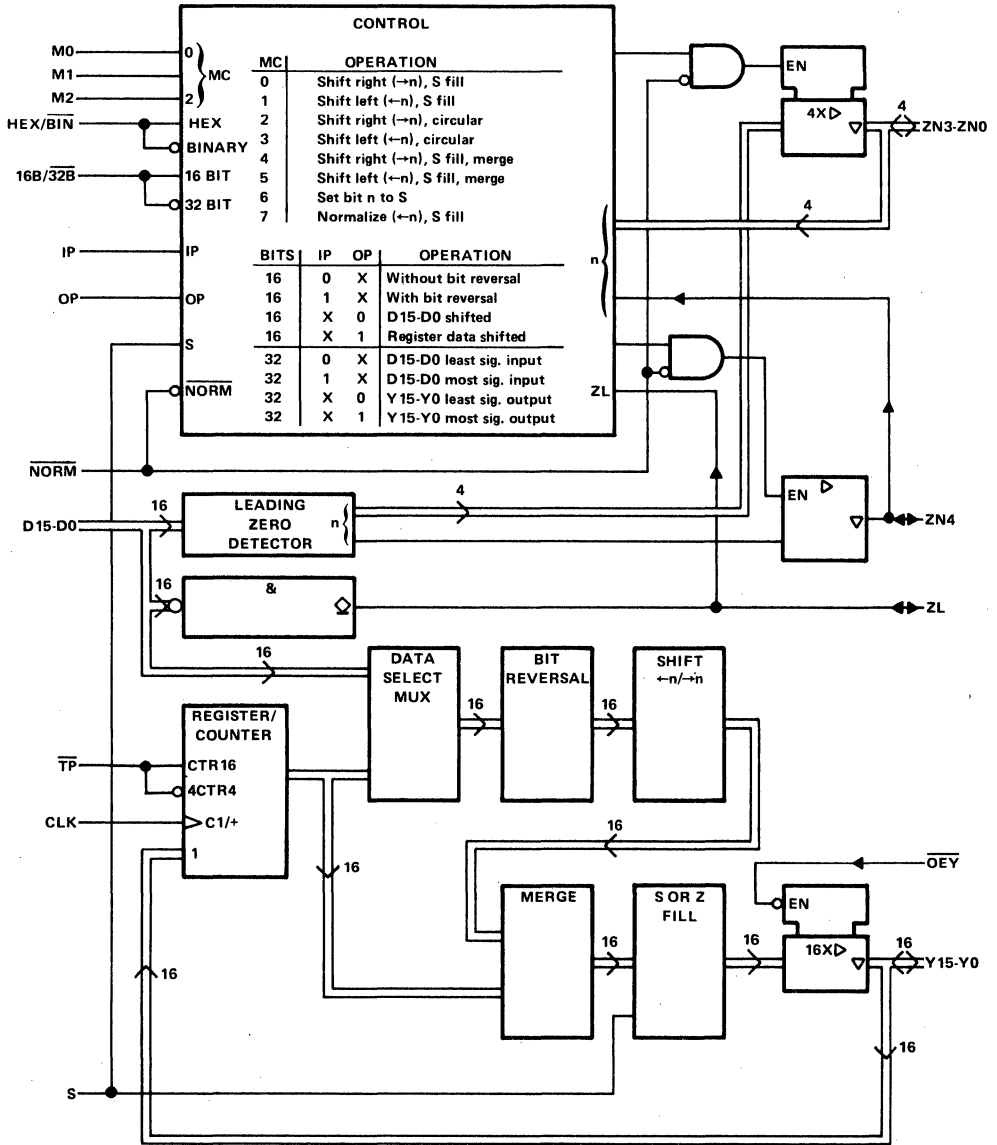

---

## 74AS-EVM-8 Bit-Slice Evaluation Module

### INTRODUCTION

The Texas Instruments 74AS-EVM-8 is a low-cost bit-slice development and evaluation system consisting of a single board, dual processor computer, extensive monitor software in ROM, nonvolatile memory for microprogram storage, and communications software for TI or IBM PCs. The 74AS-EVM-8 is a stand-alone system, designed for easy use. It consists of a 16-bit high-speed section containing:

- Two 'AS888 bit-slice processors configured as a 16-bit computer
- One 'AS890 microsequencer
- 2047 X 96 high-speed RAM micromemory
- 2047 X 96 high-speed PROM micromemory
- 2047 X 16 macromemory with program counter
- Condition code multiplexer
- Pipe Line registers
- Hardware breakpoint comparator with pass counter

The bit-slice section operates under the control of an 8-bit processor and an extensive monitor program. The control processor can read and write to all of the high-speed data and address buses and to micromemory and can read the processor status register. It also controls the clock generator circuits and can be used to single step the 'AS888.


User communication is through an RS-232-C serial port operating at selectable baud rates.

An important feature of the 74AS-EVM-8 system is the use of nonvolatile, battery-backed memory for microprogram storage. When the board is in a stand-alone configuration, up to 16 microprograms can be saved for future use, with an estimated retention time of over 5 years.

Since the 74AS-EVM-8 is a stand-alone system, a host computer is not required. If one is used, additional monitor functions are available through the supplied communications program (TIEVM.EXE for the TI PC and TIEVMX.EXE for the IBM PC/XT/AT and true compatibles).

Other evaluation modules under development include an 8-bit EVM using the 'AS887 and 'AS890, a 32-bit EVM using the 'AS832 and 'AS835, and an ECL version of the 'AS888/'AS890 EVM. For further details concerning these modules, contact VLSI Systems Engineering, (214) 995-4720.

# FUNCTIONAL BLOCK DIAGRAM

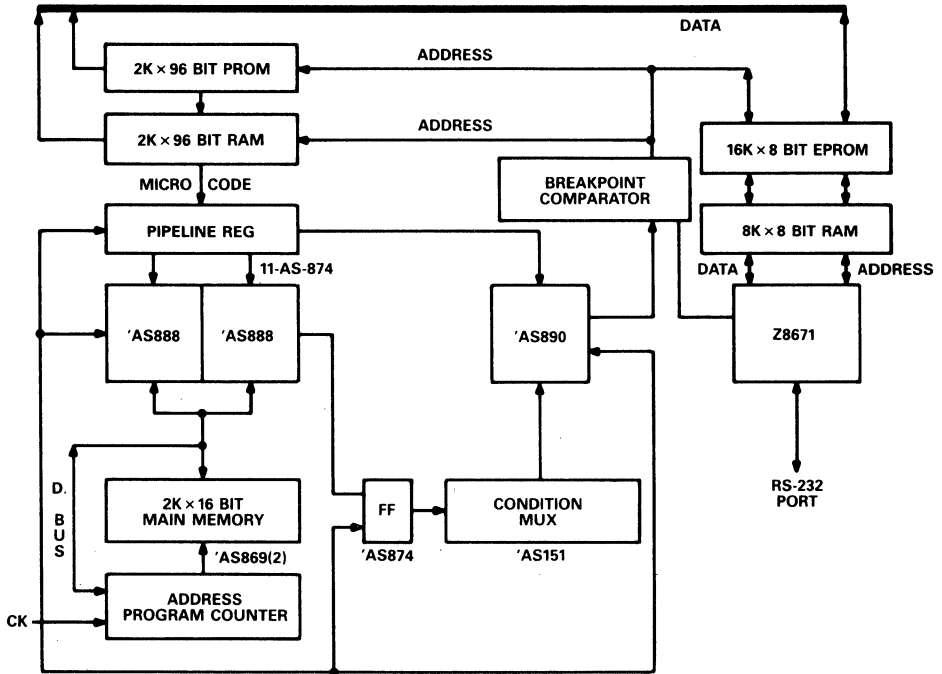

74AS-EVM-8

---

## VLSI 32-BIT FAMILY

### INTRODUCTION

A new generation of 32-bit VLSI logic devices from Texas Instruments reflects the high degree of system integration made possible by continuing improvements in bipolar and CMOS process technologies. TI will offer nine integrated circuits, including the:

- 74ACT8832 32-bit registered ALU
- 74AS8833 64-bit to 32-bit funnel shifter
- 74AS8834 64-bit by 40-bit register file
- 74ACT8818 16-bit microsequencer
- 74ACT8836 32-bit multiplier
- 74ACT8837 64-bit floating point processor
- 74AS8838 32-bit barrel shifter.
- 74AS8839 32-bit shuffle/exchange network
- 74AS8840 Digital crossbar switch

4

All the devices except the barrel shifter are designed to support parity checking and generation, as well as master/slave error checking. Pin grid array package sizes range from 84-to 208-pins.

### TECHNOLOGY

Fabricated in 1- $\mu$ m EPIC™ CMOS or IMPACT™ Bipolar technology, this chip set offers a combination of maximum integration and superior performance to the designer. Logic functions fabricated in EPIC technology can operate at clock frequencies up to 150 MHz. EPIC devices combine the performance associated with advanced bipolar processes with the low power consumption typical of CMOS.

In the past, the use of bipolar technology to achieve the complexities required by today's superminicomputer manufacturers was limited by the power dissipation required for high-speed operation.

TI has solved this problem, for the most part, by using a proprietary internal circuitry known as Schottky Transistor Logic (STL) which requires a 2-volt internal  $V_{CC}$ . Using two types of contact metallization on the same substrate to achieve a 300 mV noise margin, STL technology has allowed TI to offer VLSI bipolar products that operate at very low power levels.

### CHIP SET DEFINITION


TI's new 32-bit family has been designed to meet the following design criteria:

- 50-75 ns worst case cycle time
- 4 watts maximum power dissipation per package
- scientific accuracy (double precision floating point)
- no elaborate heat sinking required
- no glue logic required
- support 32-bit bus widths (address and data).


### TYPICAL APPLICATIONS

These design criteria result in a chip set that is well-suited to the following applications:

- Superminicomputers
- High resolution graphics
- Digital signal processing
- Array processors
- High end engineering workstations
- Artificial intelligence
- Fault tolerant computers.

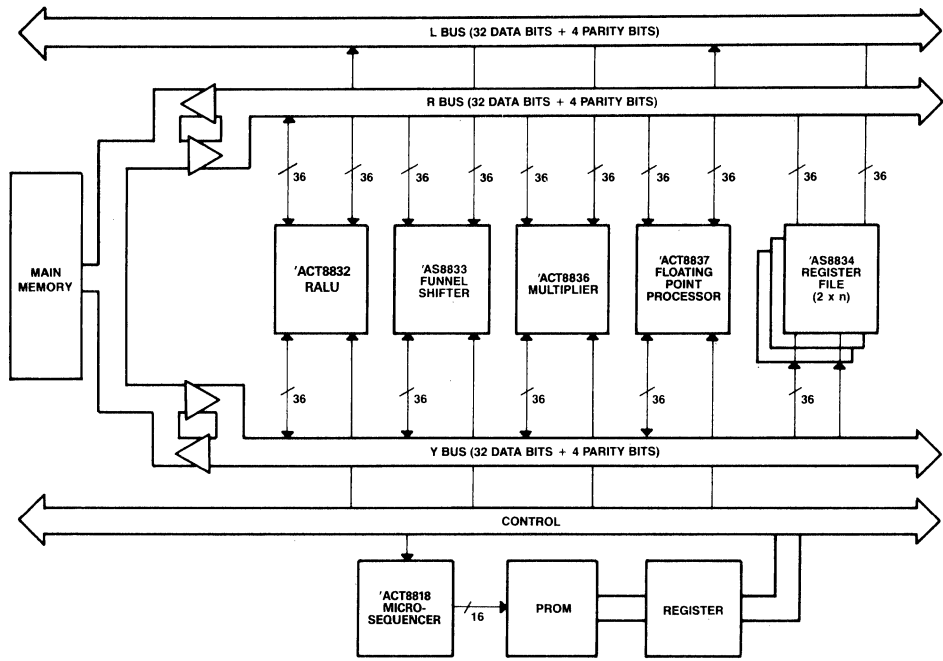

**VLSI 32-bit Family**




The 74ACT8832 is a 32-bit registered ALU that can be configured to operate as four 8-bit ALUs, two 16-bit ALUs, or a single 32-bit ALU. The device is 100% upwardly compatible with the 74AS888 bit-slice processor and includes a 64-word by 36-bit register file.



An 74AS8833 64-bit to 32-bit funnel shifter is provided separately from the RALU to increase overall system speed and offer the designer a high degree of flexibility and system parallelism.




The 74ACT8836, a 32-bit by 32-bit integer multiplier accumulator, can handle a wide variety of data types, including two's complement, signed and mixed. It can be configured for pipelined or flow-through operation.



The 74ACT8837 floating point processor is designed with 1-μm CMOS technology. It supports IEEE single and double precision floating point formats and can be configured for pipelined or flow-through operations.



An 74AS8834 64-word by 40-bit register file expands the internal register files of the 74AS8832. Four address ports operate independently to support most significant half and least significant half swap operations.



The 74ACT8818 16-bit microsequencer can address 64K of microcode memory. A 68-word by 20-bit push down stack permits address and status information to be stored during subroutine calls and interrupts.



---

## SN74ACT8832 32-Bit ALU


The 74ACT8832 is a CMOS 32-bit registered ALU that can be configured to operate as four 8-bit ALUs, two 16-bit ALUs or a single 32-bit ALU. The processor's instruction set is 100% upwardly compatible with the 74AS888 and includes 13 arithmetic and logical functions with 8 conditional shifts, multiplication, division, normalization, add and subtract immediate, bit and byte operations, and data conversions such as BCD, excess-3, and sign magnitude.

Additional functions added to the 74ACT8832 include byte parity and master/slave operation. Parity is checked at the three data input ports and generated at the Y output port. The 64-word register file is 36-bits wide to permit storage of the parity bits. Master/slave comparator circuitry is provided at the Y port.

The DA and DB ports can simultaneously input data to the ALU or the 64-word by 36-bit register file. A separate clock on the register file allows multiple writes to the file during a single cycle. Data and parity from the register file can be output on the DA and DB ports. Results of ALU and shift operations are output at the bidirectional Y port. The Y port can also be used in an input mode to furnish external data to the register file or during master/slave operation as an input to the master/slave comparator.

An MQ shifter and MQ register can also be configured to function independently, allowing double-precision 8-bit, 16-bit and 32-bit shift operations.

- Compatible with 74AS888 architecture and instruction set
- 3-Port I/O architecture
- Simultaneous ALU and register operations
- 64-Word by 36-Bit register file
- Bit, byte, 16-bit and 32-bit operations
- Configurable as quad 8-bit or dual 16-bit single instruction, multiple data machine
- Parity generation and checking
- Master/slave circuitry
- 208-pins
- 1- $\mu$ m EPIC™ CMOS technology

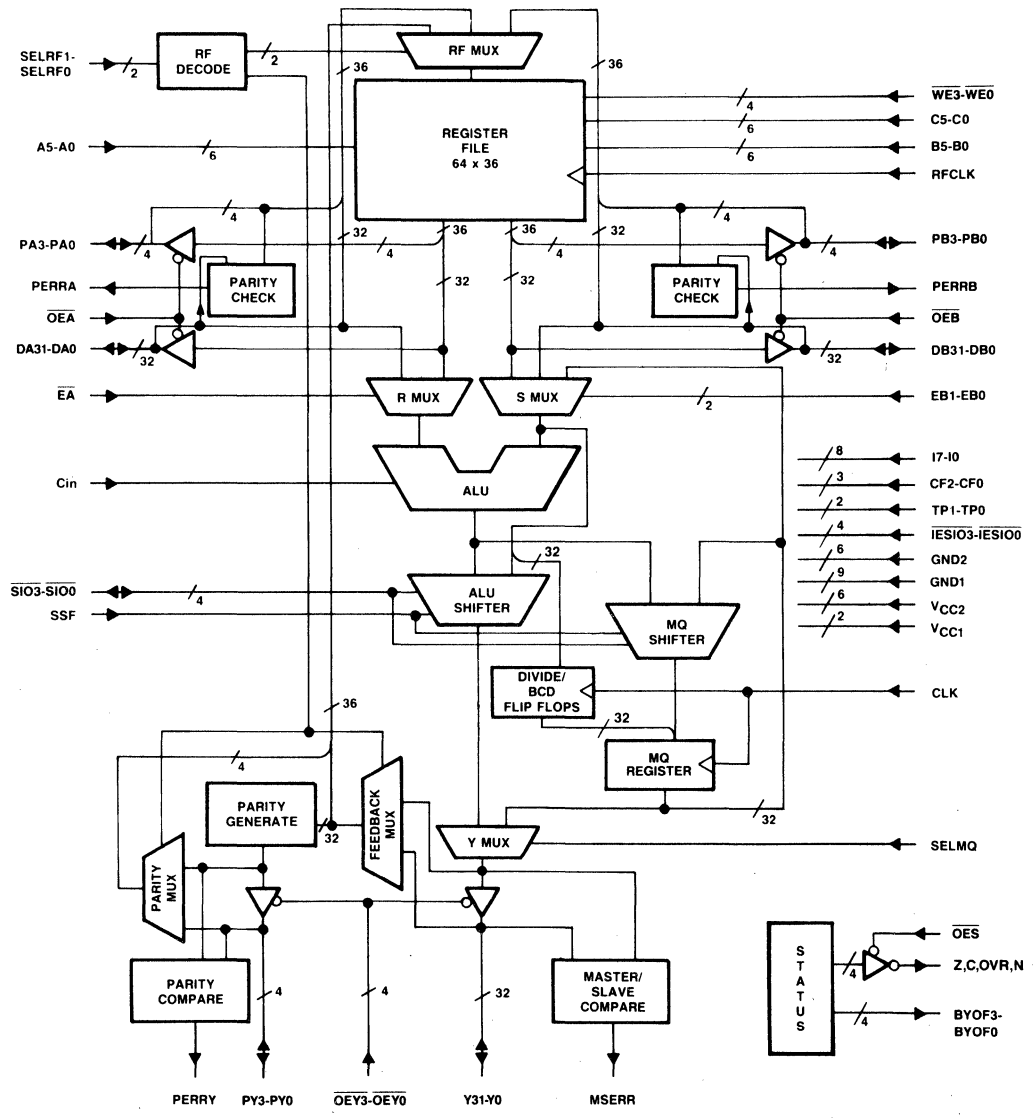

32-Bit RALU

---

## SN74ACT8818 16-Bit Microsequencer

The 74ACT8818 is a 16-bit microsequencer designed to support high-speed 32-bit systems. The sequencer can address 64K of microcode memory and is compatible with the 14-bit 74AS890. A 65-word- deep by 20-bit-wide push down stack permits address and processor status information to be stored during subroutine calls and interrupts. The stack pointer can be loaded and read from the external DRA port. This provides opportunities for stack expansion, random access to the stack and implementation of multiple stacks.


Like the 74AS890, separate control of register counters, stack and Y-output multiplexer allow the designer to merge basic operations, such as doubly nested loops, n-way branches, conditional branches and subroutine calls and returns in a large number of complex single instructions. In addition, an ALU is provided to compute a relative address by adding the contents of the DRA bus to the contents of the microprogram register. Sixteen signals at the B port in combination with four external status signals provide sixteen-way branch capability selectable from five sources. Eight additional external status pins and internal status generation logic provide the designer with increased flexibility for status signal and condition code select configurations.

### 4

Input to the chip is through two external data ports, DRA and DRB, or by means of the bidirectional Y port, which also outputs the current address generated by the sequencer. Other components include: a 16-bit microprogram counter consisting of a register and incrementer that generates the next sequential address; two register/counters for counting loops and iterations, and storing branch addresses; a trap register; a breakpoint comparator with upper and lower limits; an interrupt return register and Y output enable for interrupt processing at the microinstruction level; and a Y output multiplexer by which the next address can be selected from the microprogram counter, register counters, external data buses DRA and DRB, or top of stack.

The 74ACT8818 will be offered in a 156-pin package.

- 16-Bit address bus allows up to 64K of control store
- Compatible with 74AS890 architecture and instruction set
- 65-word stack
- 20-bit stack width allows storage of status bits
- Shadow registers for diagnostics
- Supports real time interrupts, trap interrupts, hardware breakpoints, 16-way branching, decrement-to-zero status, read and write stack pointers, master/slave checking
- Master/slave circuitry
- 156-pin package
- 1- $\mu$ m EPIC™ CMOS technology

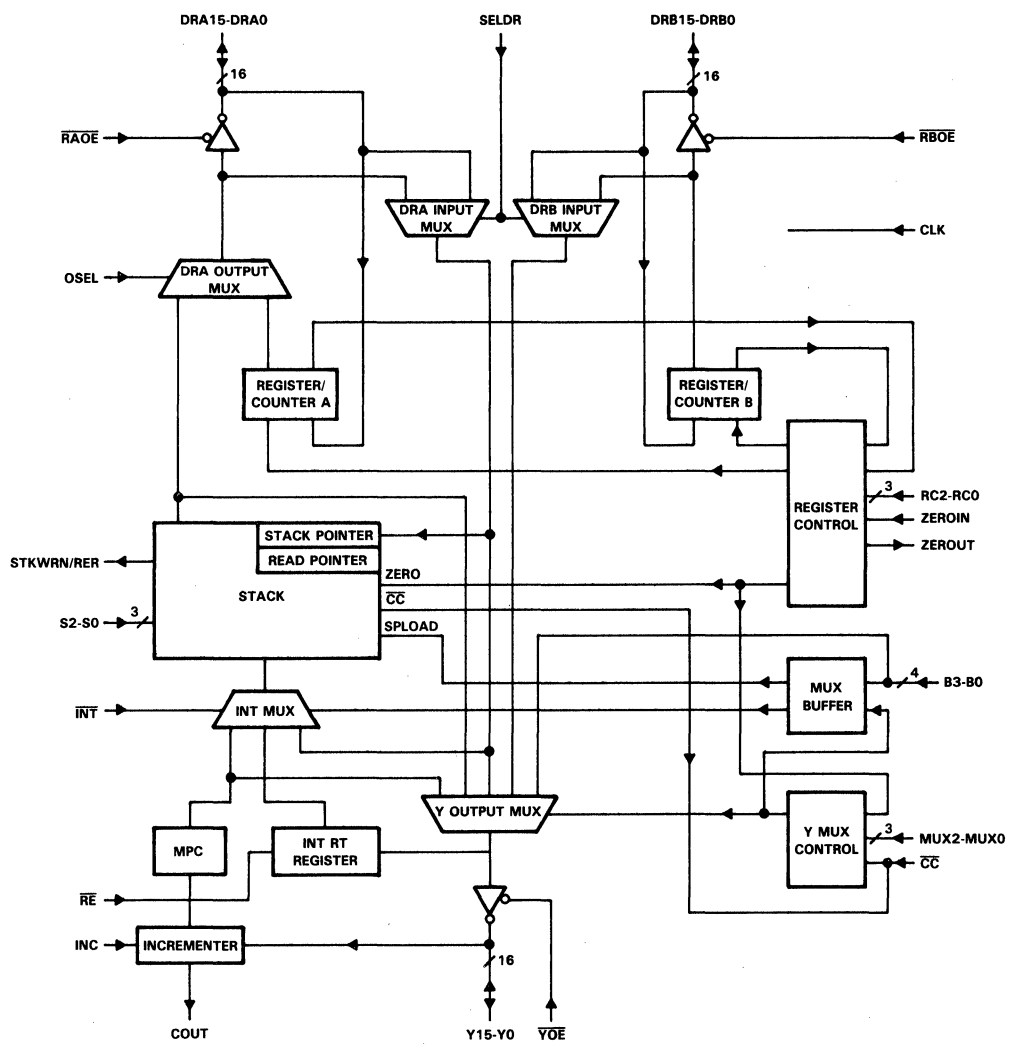

SNACT8818 16-Bit Microsequencer

---

## SN74ACT8836 32-Bit by 32-Bit Multiplier


The SN74ACT8836 is a 32-bit by 32-bit integer multiplier/accumulator. Data input is through two registered 32-bit ports, DA and DB; output is through the registered 32-bit Y port. The registers have independent enable signals but are controlled by the same clock and may be made transparent for feed-through operation.

The device can handle a wide variety of data types, including two's complement, signed and mixed, and can also operate as a 64-bit by 64-bit multiplier. Seven clock cycles are required to perform a 64-bit by 64-bit multiply and multiplex the 128-bit result.

A multiply accumulate mode is provided to add or subtract the accumulator from the product. In this mode, three overflow bits are provided, resulting in a 67-bit result. All 67 bits are presented externally with an overflow warning flag that indicates whether overflow has occurred.

A rounding feature in the 74ACT8836 provides for rounding up the most significant 16-bits of the product when only a 16-bit result is desired. To ensure data integrity, byte parity checking is performed on both input ports, and a parity generator and a master/slave comparator are provided at the output.

- 32-bit by 32-bit integer multiplier/accumulator
- Can perform 64-bit by 64-bit operations
- Accumulator bypass option
- Overflow status
- Signed, unsigned or mixed operands
- Parity generation/checking
- Master/slave circuitry
- 156-pin package
- 1- $\mu$ m EPIC™ CMOS technology

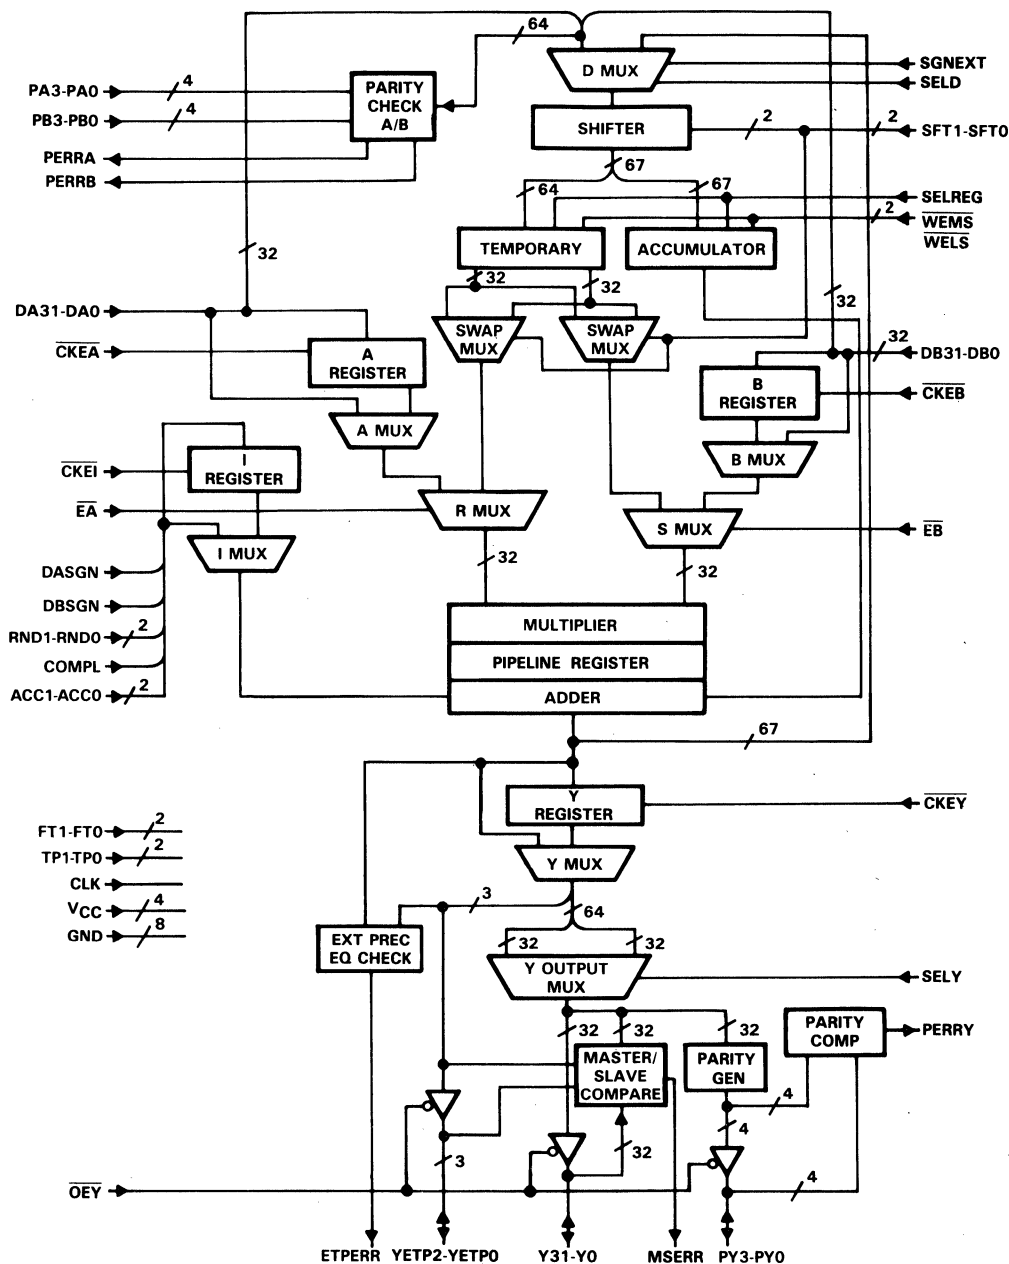

32-Bit by 32-Bit Multiplier

---


## SN74ACT8837 64-Bit Floating Point Processor

The SN74ACT8837 is a high speed floating point processor implemented in TI's advanced 1- $\mu$ m CMOS technology. The device is fully compatible with IEEE standard 754 version 10.1 for addition, subtraction and multiplication. Division is also supported using the Newton/Raphson algorithm.

Division is made possible by a sum-of-products operating mode, one of two modes in which the device's multiplier and ALU operate in parallel. Absolute value, conversion to and from 32-bit two's complement integers and a compare instruction are also included.

The 74ACT8837's pipeline registers can be bypassed, providing a flow-through architecture. The input buses can be configured as two 32-bit buses or as a single 64-bit bus. A clock option allows the registers to be clocked on the rising edge of the clock or on both the rising and falling edge. Parity checking on the input buses and parity generation on the output bus is also provided. An on-chip master/slave comparator is included for multi-chip fault detection. The device will be packaged in a 208-pin grid array.

- Multiplier and ALU in one chip
- Fully compatible with IEEE standard 754 version 10.1
- Performs addition, subtraction, multiplication
- Performs division using Newton/Raphson algorithm
- Supports sum-of-products and product-of-sum chain operations
- Floating point to integer and integer to floating point conversion
- Can be configured for pipelined or flow-through architecture
- Parity checking/generation
- Master/slave error detection
- 208-pin package
- 1- $\mu$ m EPIC™ CMOS technology

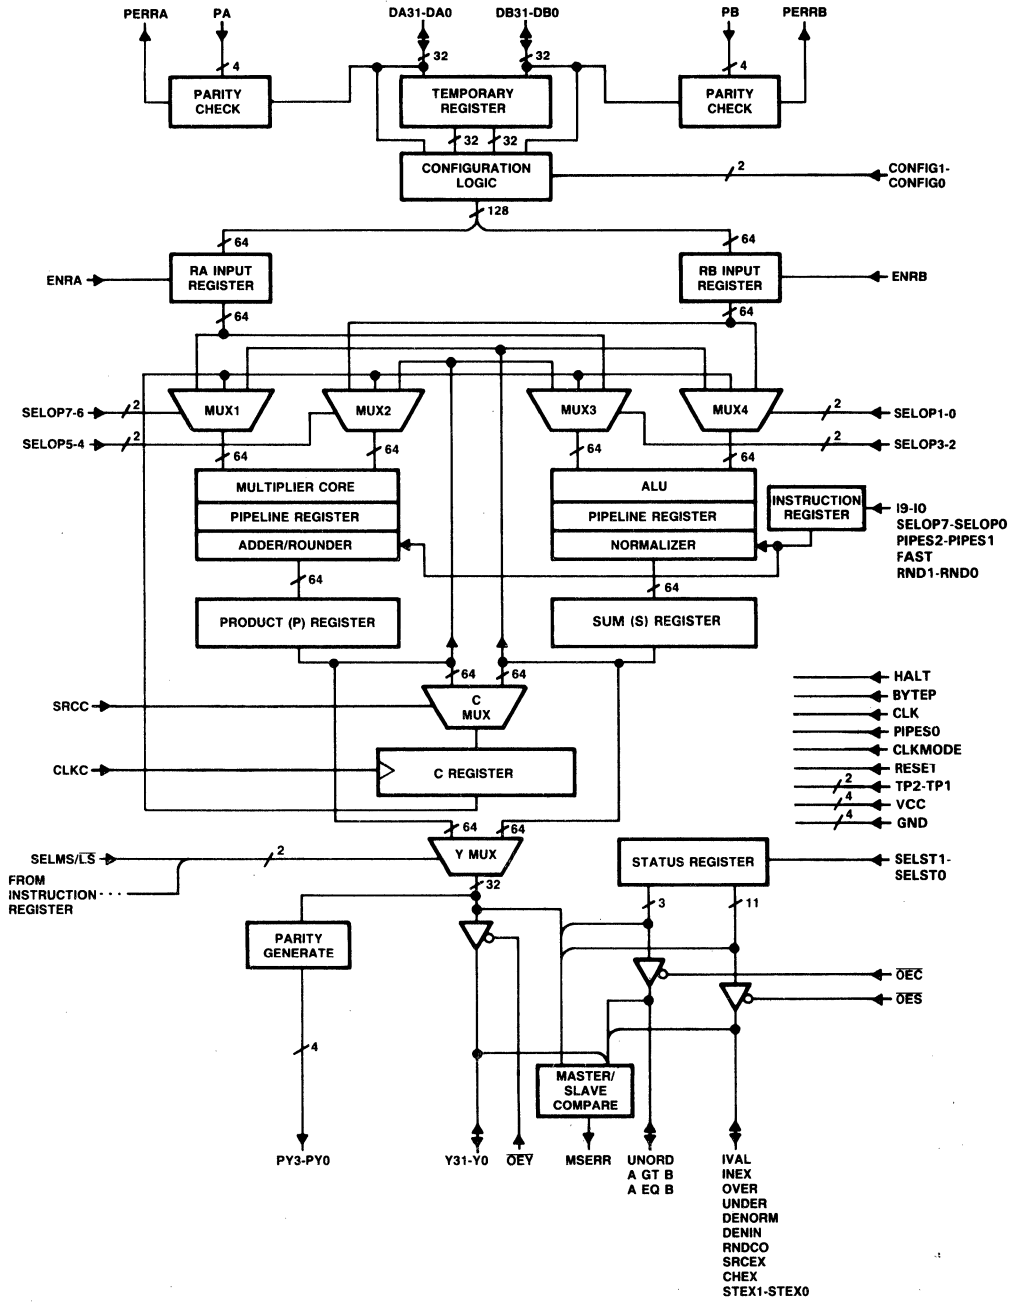

64-Bit Floating Point Processor



## SN74AS8833 64-Bit to 32-Bit Funnel Shifter

The SN74AS8833 64-bit to 32-bit funnel shifter can be used to increase overall speed in systems where multi-bit shift operations and field masking are used frequently. The shifter offers the designer opportunities for increasing system flexibility and achieving high degrees of system parallelism.

The 64-to-32-bit funnel shifter enlarges the shift capability of TI's 32-bit family. It can perform several AND, OR and XOR operations on any 32-bit field for masking and field merges or extractions and can execute byte and half-word rotations. Any field can be extracted from the 65 input-bits, and subfields of one input data bus can be overlaid onto input from the other. Both single-precision and double-precision shift operations are supported for arithmetic, logical and circular left and right shifts. In addition, single- and double-precision normalization can be performed using the two data formats.


An on-chip shadow register can be used to serially shift out data from the Y-bus for testing or debug operations. Parity generation and checking is also supported.

The device will be offered in a 156-pin package.

- Performs shifting, field extraction, and field overlays
- Performs logical masking
- Performs byte and half word (16-bit) rotations
- Performs normalization for IEEE and IBM floating point formats
- Parity generation/checking
- Master/slave circuitry
- 156-pin package

### 'AS8833 Instruction Set

'AS8833 Instruction Set		
Pass F to Y	Shift instructions (single- and double-precision)	Data Normalization (single- and double-precision)
Half-word (16-bit) rotate		
Byte rotate		
F + Mask Register		
F * Mask Register		
F XOR Mask Register		
Field extract		
Field overlay	Arithmetic left	IEEE format
	Arithmetic right	IBM format
	Logical left	
	Logical right	
	Circular left	
	Circular right	

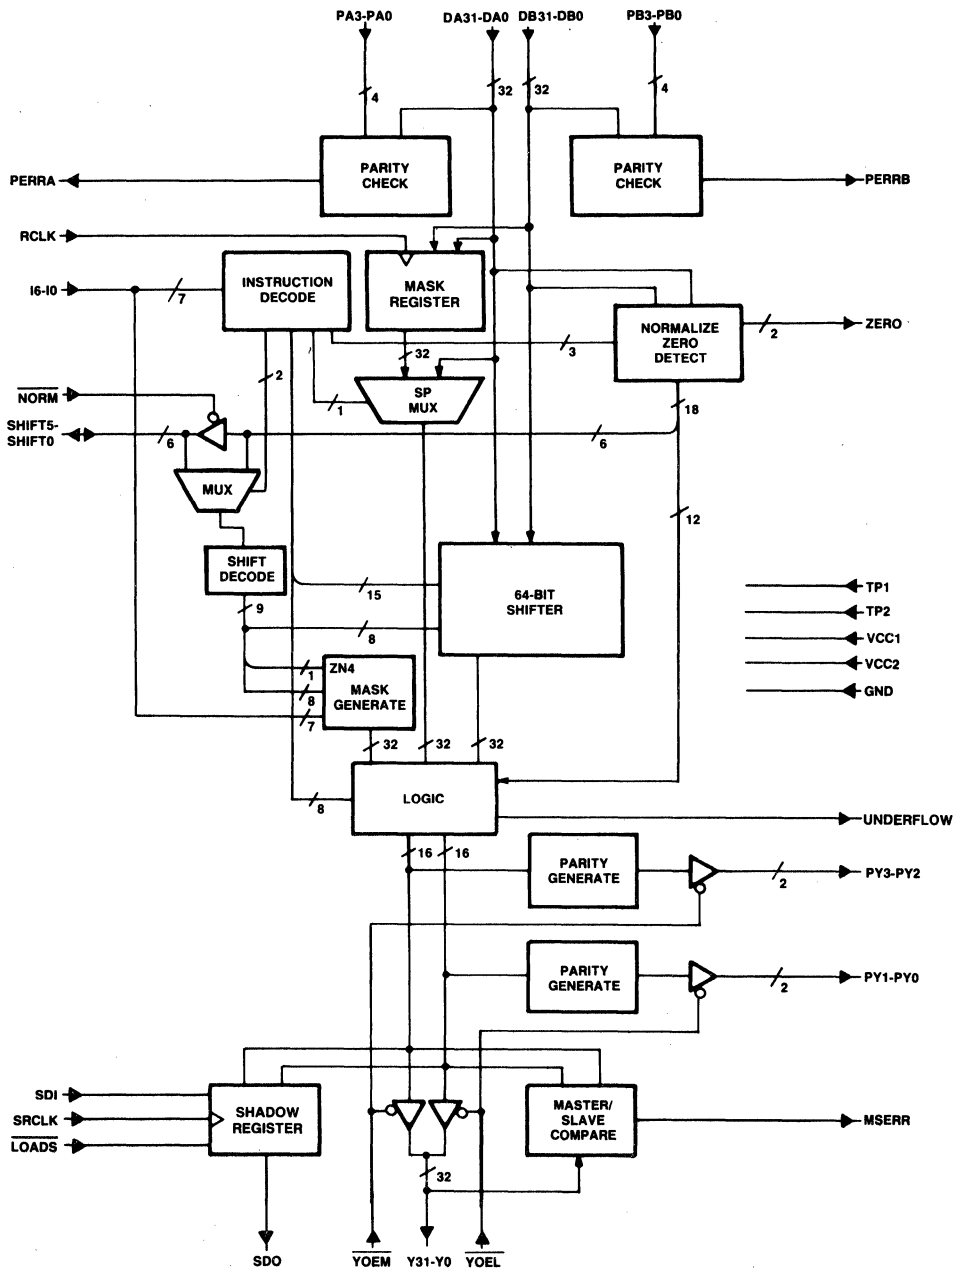

64/32-Bit Funnel Shifter


## SN74AS8838 32-Bit Barrel Shifter

The SN74AS8838 is a high-speed 32-bit barrel shifter in an 85-pin ceramic pin grid array. The devices can shift up to 32 bits in a single instruction cycle of under 25 ns. Five basic shifts can be programmed: circular left and right; logical left and right; and arithmetic right.

Unlike conventional shift registers, whose shift operations are controlled by the number of input clock pulses applied, the number of positions to be shifted by the 74AS8838 is determined by an input decoder. This form of implementation does not require an input clock; thus the shift operation is restricted only by internal propagation delays. The delay is the same regardless of the number of positions to be shifted, resulting in a high-speed "flash" shift.

Input to the chip is through the 32-bit D data port; output is through two 16-bit Y data ports. Two 3-state output controls enable the Y data ports. A shift control block decodes the instruction inputs and the shift position controls and transmits the resulting control signals to the shifter. MUX1-MUX0 control shift instruction selection, while SFT4-SFT0 specify the number of bit positions to be shifted.

- High-speed "flash" shift operations
- Shifts up to 32 positions in less than 25 ns typical
- Performs logical, circular and arithmetic shifts
- 3-state outputs allow 32-bit and 16-bit bus interface
- 85-pin package
- Uses less than 1.5 W (max)

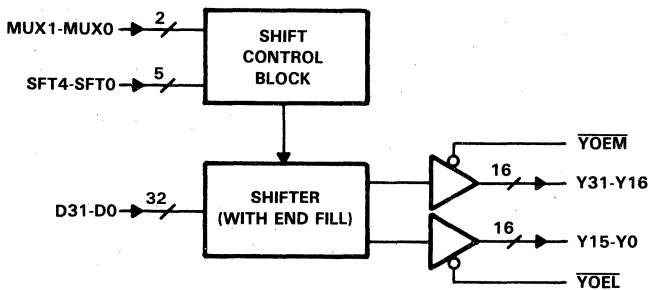

32-Bit Barrel Shifter


---

## SN74AS8834 40-Bit Register File

The SN74AS8834 64-word by 40-bit register file is designed to expand the internal register files of the 74AS8832 32-bit registered ALU or the 74AS888 expandable bit-slice processor. Internal parity checks are provided for each of the four 10-bit data input ports. Data is output through four 10-bit output ports.

Four address ports, two write and two read, operate independently to support MSH/LSH swap operations. Two separate write addresses permit the most significant and the least significant half of a word to be stored at different addresses.

- Three-operand, 64-word by 40-bit register file
- Supports 74AS888 and 74AS8832 register file expansion
- Four 10-bit input ports with individual parity checkers and write enables
- Four 10-bit output ports with individual 3-state enables
- Two write address ports
- Two read addresses and Y output mux permit LSH/MSH swap operations
- 156-pin package

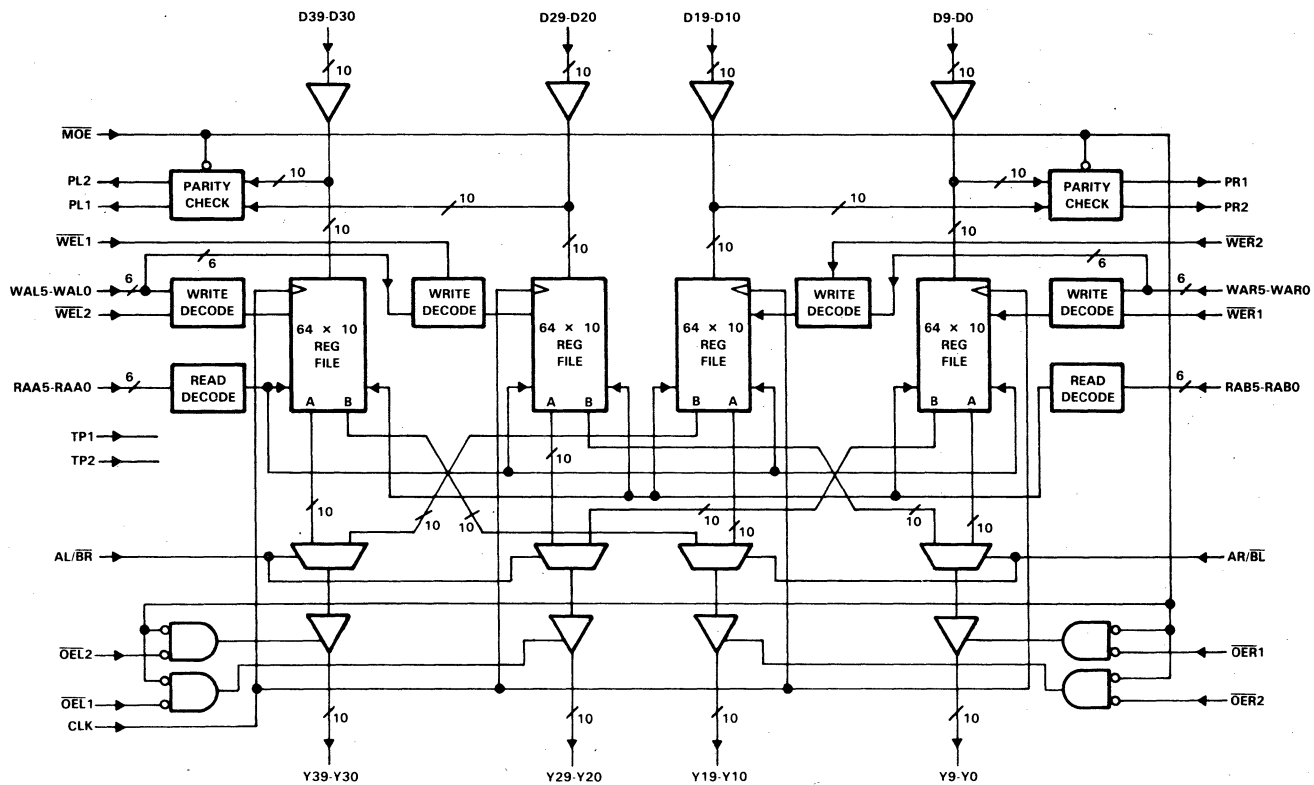

74AS8834 40-Bit Register File

---

## SN74AS8839 32-Bit Shuffle/Exchange Network

### DESCRIPTION

The SN74AS8839 is a high-speed 32-bit shuffle/exchange network in an 85-pin ceramic pin-grid array package. The device can perform data permutations on 32-bit, 16-bit, 8-bit, and 4-bit words in a single instruction cycle time of under 25 nanoseconds.

The type of data permutation to be performed is determined by an input decoder. Data manipulation is not clock dependent and is restricted only by internal propagation delays. The delay is the same regardless of the number of positions to be routed, resulting in a high-speed shuffle.

Three-state output controls allow the device to be interfaced with 32-bit or 16-bit data buses.


The shuffle/exchange networks are designed for use primarily in multiple processor applications. The device can be used to implement single-instruction multiple-data (SIMD) array processors. SIMD processors are used in Fast Fourier Transforms (FFTs). An example of an FFT computation using the 'AS8839 is published in a separate brochure entitled "Innovation ... The New 32-bit Shuffle/Exchange Network". The shuffle/exchange networks can also be used for fault-tolerant computer applications.

The SN74AS8839 is characterized for operation from 0 °C to 70 °C.

### FEATURES

- High-Speed Data Manipulation
- Shuffles up to 32-Bit Data Streams
- Performs Shuffle and Exchange Permutations on Entire Data Streams or Substrings for Implementing Algorithms and/or Matrix Operations
- 24-mA Bus Drivers
- 3-State Outputs Allow 32-Bit and 16-Bit Bus Interface
- 85-Pin Package

## SN74AS8839 32-Bit Shuffle/Exchange Network

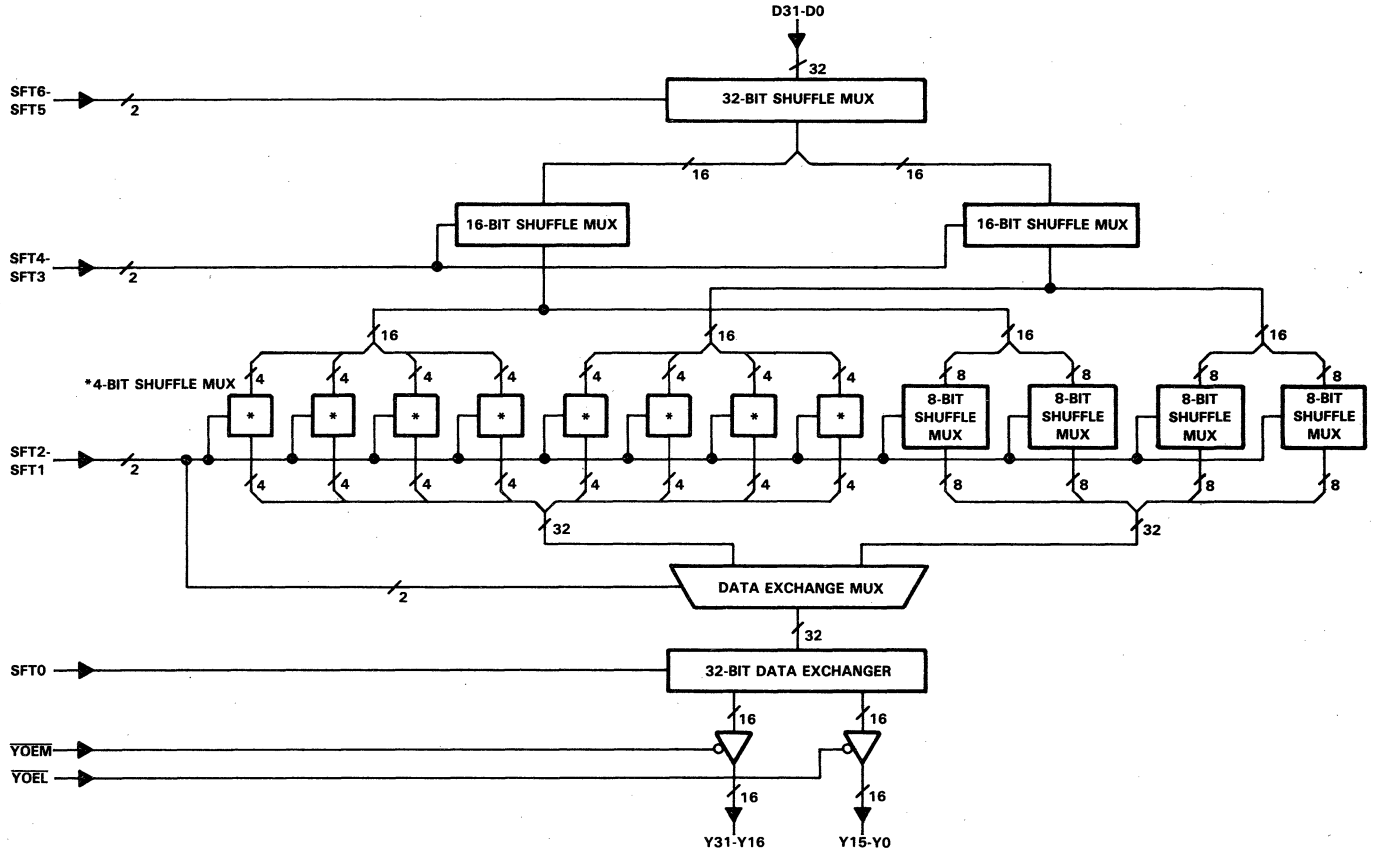

---

## SN74AS8840 Digital Crossbar Switch

### DESCRIPTION

The AS8840 is a high-speed digital crossbar switch with four selectable control sources, including two banks of programmable control flip-flops and two hard-wired control circuits. The device can switch from 1 to 16 nibbles (4 to 64 bits) of data in a single cycle.

The AS8840 has 64 I/O pins arranged in 16 switchable nibbles. A single input nibble can be broadcast to any combination of 15 output nibbles, or even to 16 nibbles (including itself) if operating off registered data. Multiple input nibbles can be switched to multiple outputs, depending on the programmed configurations available in the control flip-flops.


The digital crossbar switch is intended primarily for multiprocessor interconnection and parallel processing applications. The device can be used to select and transfer data from multiple sources to multiple destinations. Since it can be dynamically reprogrammed, it is suitable for use in reconfigurable networks for fault-tolerant routing.

The SN74AS8840 is characterized for operation from 0°C to 70°C.

### KEY FEATURES

- Advanced Schottky IMPACT™ Process
- High-Speed Programmable Switch for Parallel Processing Applications
- Dynamically Reconfigurable for Fault-Tolerant Routing
- 64 Bidirectional Data I/Os in 16-Nibble (4-Bit) Groups
- Data I/O Selection Programmable by Nibble
- Selectable Stored-Data or Real-Time Inputs
- Two Banks of Control Flip-Flops for Storing Configuration Programs
- Two selectable Hard-Wired Switching Configurations
- 156-Pin Grid Array Package



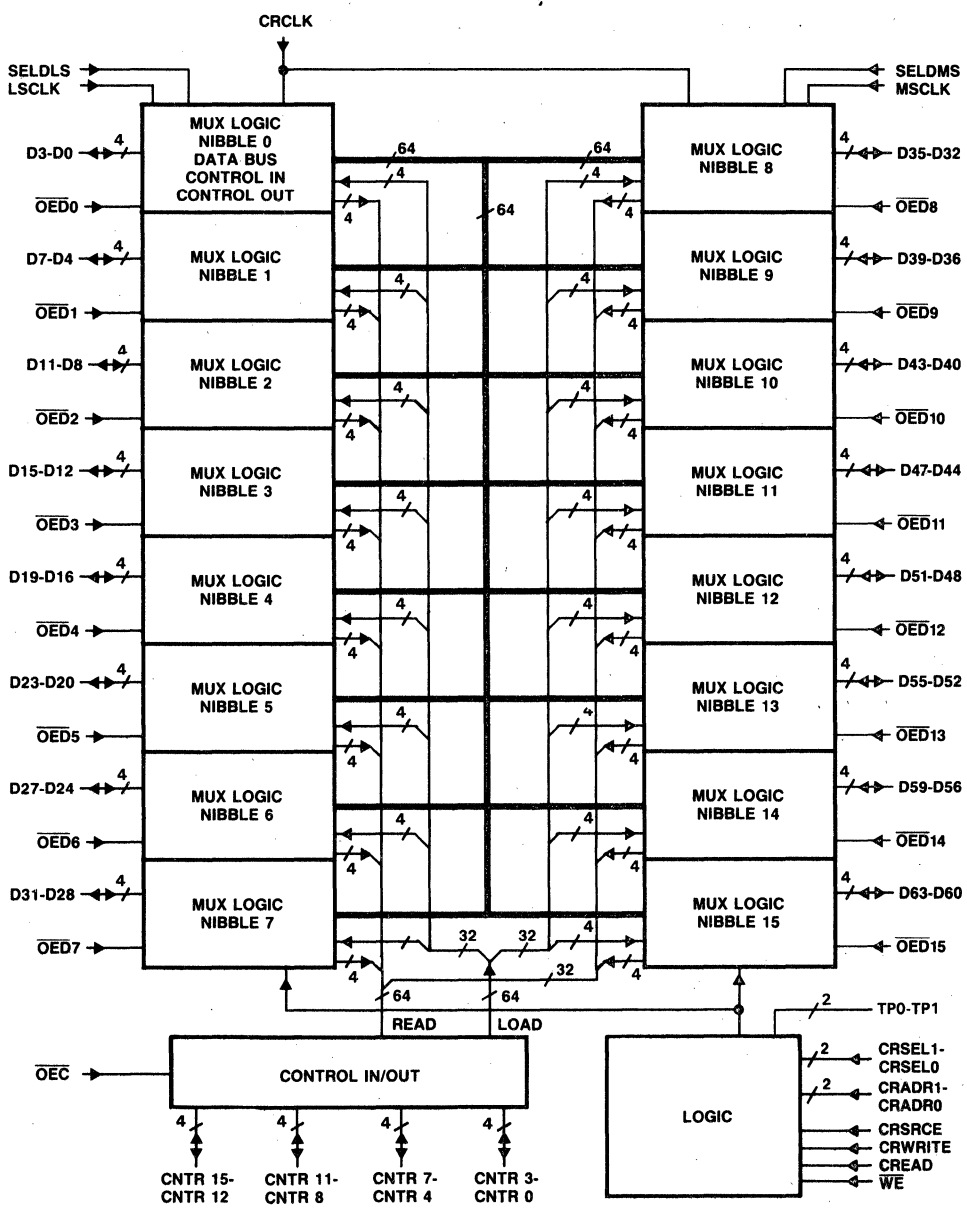

SN74AS8840 Digital Crossbar Switch

---

## CONTROLLERS

### TACT2150 Cache Address Comparator

#### DESCRIPTION

This 8-bit-slice cache address comparator consists of a high-speed  $512 \times 9$  static RAM array, parity generator, parity checker, and 9-bit high-speed comparator. It is fabricated using advanced CMOS technology for high-speed, low-power interface with bipolar TTL circuits. The cache address comparator is easily cascadable for wider tag addresses or deeper tag memories. Significant reductions in cache memory component count, board area, and power dissipation can be achieved with this device.

When  $\overline{S}$  is low and  $\overline{W}$  is high, the cache address comparator compares the contents of the memory location addressed by A0-A8 with the data on D0-D7 plus generated parity. An equality is indicated by the high level on the MATCH output. A low-level output from  $\overline{PE}$  signifies a parity error in the internal RAM data.  $\overline{PE}$  is an N-channel open-drain output for easy OR-tying. During a write cycle ( $\overline{S}$  and  $\overline{W}$  low), data on D0-D7 plus generated even parity are written in the 9-bit memory location addressed by A0-A8. Also during write, a parity error may be forced by holding  $\overline{PE}$  low.

A  $\overline{RESET}$  input is provided for initialization. When  $\overline{RESET}$  goes low, all  $512 \times 9$  RAM locations are cleared to zero (with valid parity) and the MATCH output is forced high. If an input data word of zero is compared to any memory location that has not been written into since reset, MATCH will be high indicating that input data, plus generated parity, is equal to the reset memory location.  $\overline{PE}$  will be high for every addressed memory location after reset indicating no parity error in the RAM data. By tying a single data input pin high, this bit will function as a valid bit and a match will not occur unless data has been written into the addressed memory location. When cascading in the width direction, only one bit needs to be tied high regardless of the address width.

The TACT2150 operates from a single 5 V supply and is offered in a 24-pin 300-mil ceramic side-brazed and plastic "Small Outline" packages. The device is fully TTL compatible and is characterized for operation for 0°C to 70°C.


#### KEY FEATURES

- Fast Address to Match Valid Data
- Two Speed Ranges: 20 ns, 30 ns
- $512 \times 9$  Internal RAM
- 300-Mil 24-Pin Ceramic Side-Brazed or Plastic Dual-in-Line or Small Outline Packages
- 53 mA Typical Supply Current
- On-Chip Parity Generation and Checking
- Parity Error Output/Force Parity Error Input
- On-Chip Address/Data Comparator
- Asynchronous, Single-Cycle Reset
- Easily Expandable
- Fully Static
- Reliable Advanced CMOS Technology
- Fully TTL Compatible

# FUNCTION BLOCK DIAGRAM

## 4

### Processors and Controllers

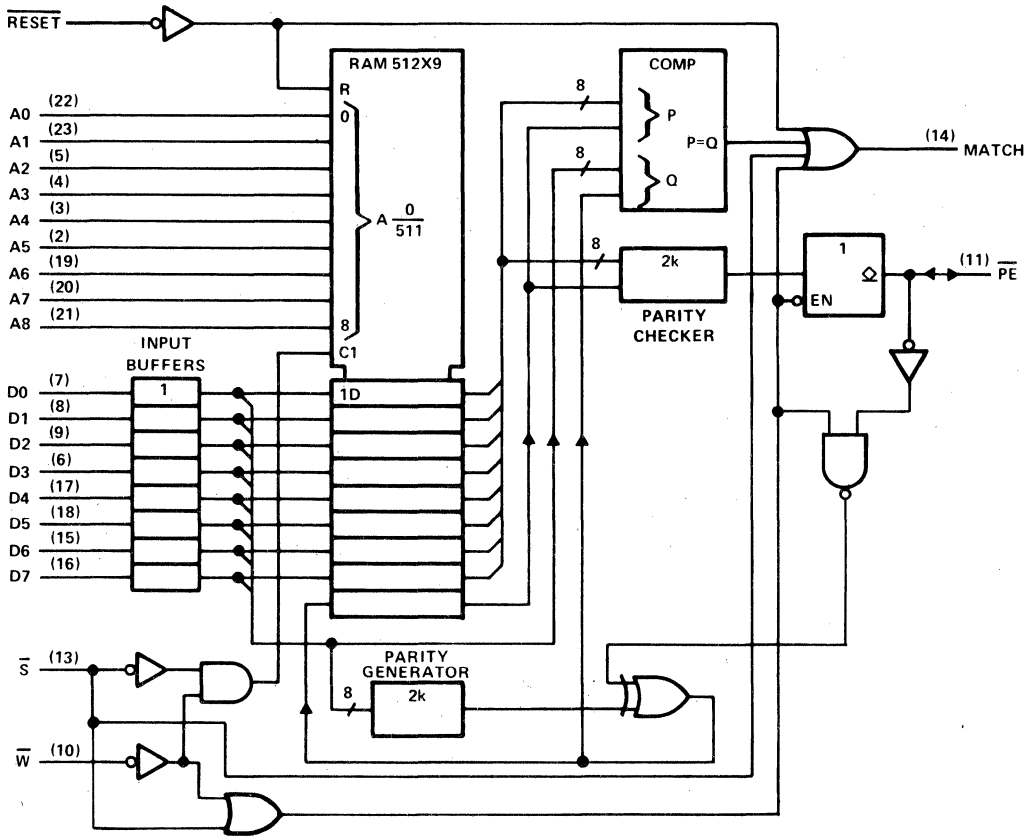

TACT2150

---

## SN74ALS2967 and SN74ALS2968 Dynamic RAM Controller

### KEY FEATURES

- Provides Control for 16K, 64K, and 256K Dynamic RAMs
- Highest-Order Two-Address Bits Select One of Four Banks of RAMs
- Supports Scrubbing Operations and Nibble-Mode Access
- Separate Output Enable for Multi-Channel Access to Memory
- 48-Pin Dual-In-Line Package

### DESCRIPTION

The 'ALS2967 and 'ALS2968 dynamic memory controllers (DMCs) are designed for use in today's high-performance memory systems. The DMC acts as the address controller between any processor and dynamic memory array.

Two versions are provided that help simplify interfacing to the system dynamic timing controller. The 'ALS2967 offers active-low Row Address Strobe Input ( $\overline{\text{RAS}}$ ) and Column Address Strobe Input ( $\overline{\text{CAS}}$ ), while the 'ALS2968 offers active-high Row Address Strobe Input (RASI) and Column Address Strobe Input (CASI) inputs.

Using two 9-bit address latches, the DMC will hold the row and column addresses for any DRAM up to 256K. These latches and the two row/column refresh address counters feed into a 9-bit, 4-input MUX for output to the dynamic RAM address lines. A 2-bit bank select latch is provided to select one of the four  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$  outputs. The two bits are normally obtained from the two highest-order address bits.


The 'ALS2967 and 'ALS2968 have two basic modes of operation, read/write and refresh. During normal read/write operations, the row and column addresses are multiplexed to the dynamic RAM, with the corresponding  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$  signals activated to strobe the addresses into the RAM. In the refresh mode, the two counters cycle through the refresh addresses. If memory scrubbing is not being implemented, only the row counter is used. When memory scrubbing is being performed, both the row and column counters are used to perform read-modify-write cycles. In this mode all  $\overline{\text{RAS}}$  outputs will be active (low) while only one  $\overline{\text{CAS}}$  output is active at a time.

The SN74ALS2967 and SN74ALS2968 are characterized for operation from 0°C to 70°C.

# LOGIC DIAGRAM (POSITIVE LOGIC)

## 4

### Processors and Controllers

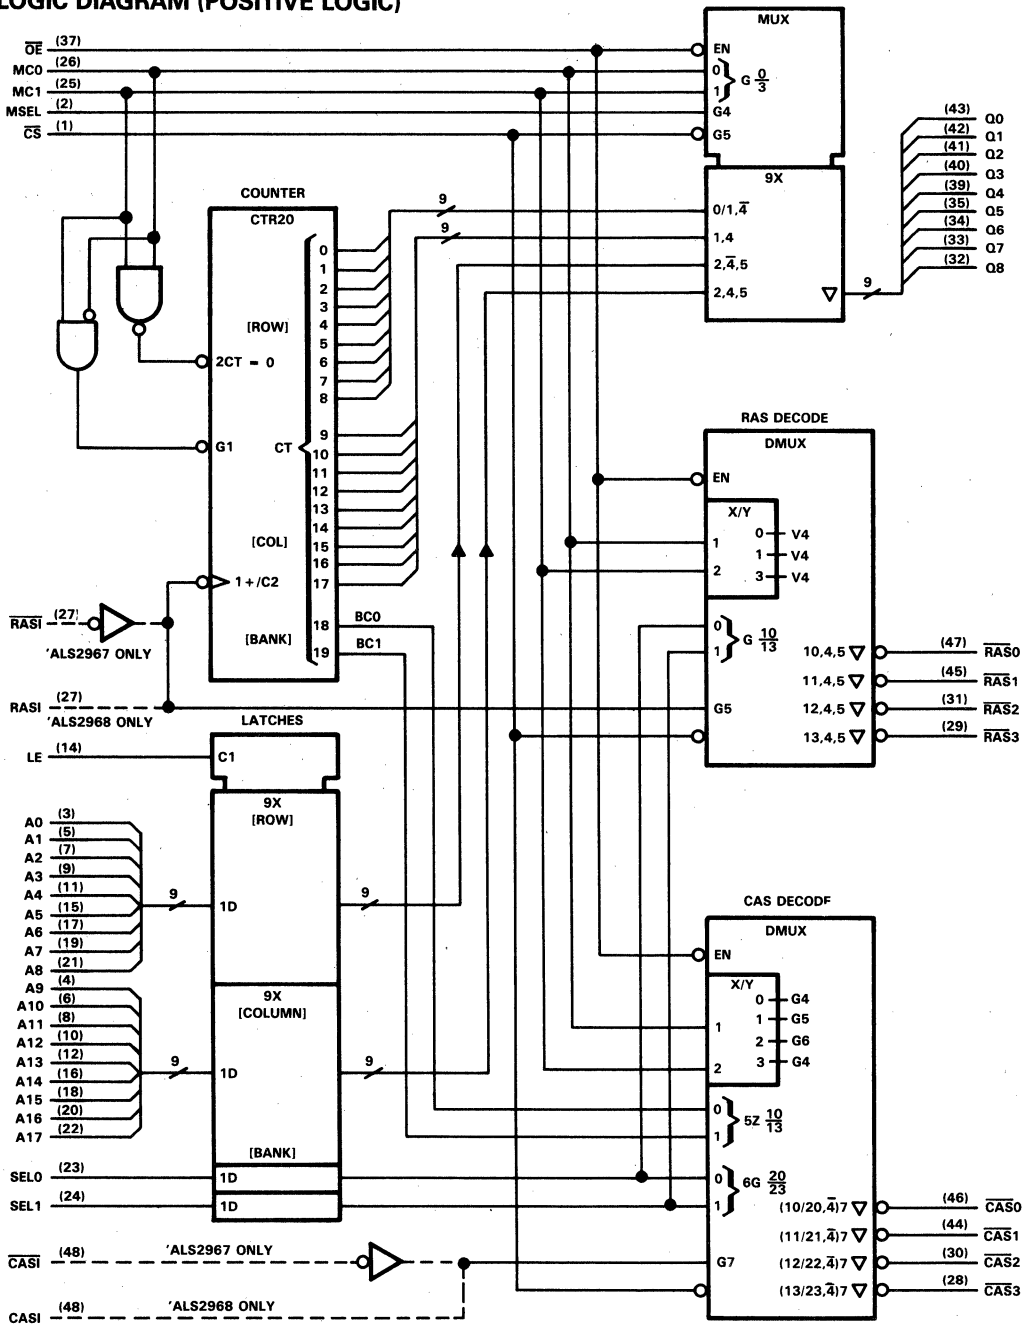

SN74ALS6301 and SN74ALS6302

---

## SN74ALS6301 and SN74ALS6302 Dynamic RAM Controller

### FEATURES

- Provides Control for 16K, 64K, 256K, and 1M Dynamic RAMs
- Highest-Order Two-Address Bits Select One of Four Banks of RAMs
- Supports Scrubbing Operations and Nibble-Mode Access
- Separate Output Enable for Multi-Channel Access to Memory
- 52-Pin Dual-In-Line Package

### DESCRIPTION

The 'ALS6301 and 'ALS6302 dynamic memory controllers (DMCs) are designed for use in today's high-performance memory systems. The DMC acts as the address controller between any processor and dynamic memory array.

Two versions are provided that help simplify interfacing to the system dynamic timing controller. The 'ALS6301 offers active-low Row Address Strobe Input ( $\overline{\text{RAS}}\text{I}$ ) and Column Address Strobe Input ( $\overline{\text{CAS}}\text{I}$ ); while the 'ALS6302 offers active-high Row Address Strobe Input (RASI) and Column Address Strobe Input (CASI) inputs.

Using two 10-bit address latches, the DMC will hold the row and column addresses for any DRAM up to 1M. These latches and the two row/column refresh address counters feed into a 10-bit, 4-input MUX for output to the dynamic RAM address lines. A 2-bit bank select latch is provided to select one of the four  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$  outputs. The two bits are normally obtained from the two highest-order address bits.


'ALS6301 and 'ALS6302 have two basic modes of operation, read/write and refresh. During normal read/write operations, the row and column addresses are multiplexed to the dynamic RAM, with the corresponding  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$  signals activated to strobe the addresses into the RAM. In the refresh mode, the two counters cycle through the refresh addresses. If memory scrubbing is not being implemented, only the row counter is used. When memory scrubbing is being performed, both the row and column counters are used to perform read-modify-write cycles. In this mode all  $\overline{\text{RAS}}$  outputs will be active (low) while only one  $\overline{\text{CAS}}$  output is active at a time.

The SN74ALS6301 and SN74ALS6302 are characterized for operation from 0°C to 70°C.

# LOGIC DIAGRAM (POSITIVE LOGIC)

4

Processors and Controllers

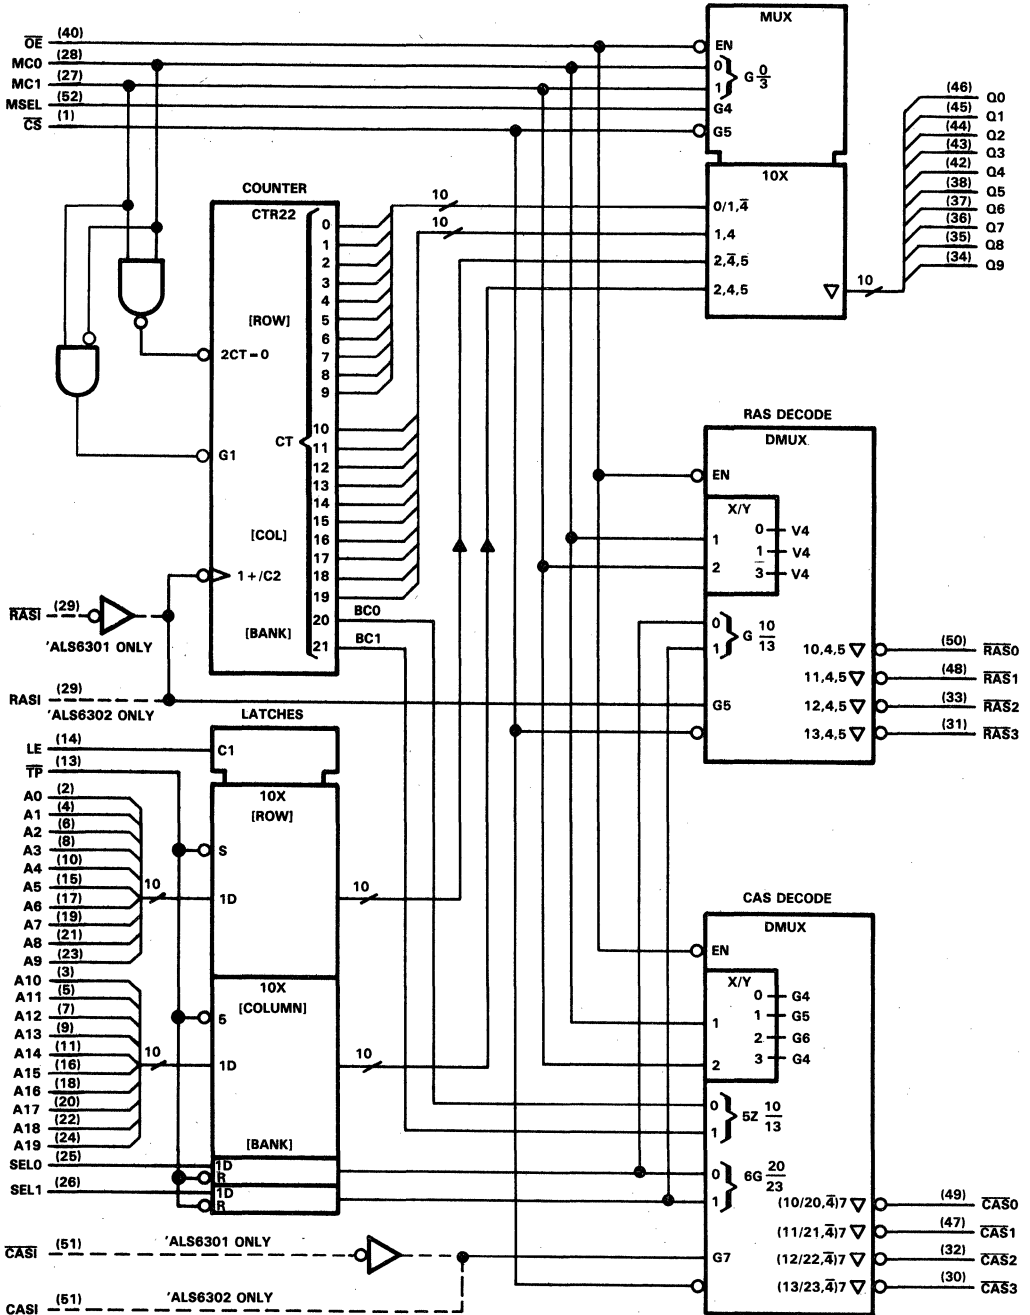

SN74ALS2967 and SN74ALS2968

---

# MILITARY PRODUCTS

The Texas Instruments Military program offers high-reliability integrated circuits covering a wide product spectrum. It is designed to meet and support semiconductor requirements of the military end-equipment manufacturers and users who require high-reliability integrated circuits.

Processing per the requirements of MIL-M-38510 and specified methods in MIL-STD-883 provides the user with a broad selection of high-quality, high-reliability, standard products. Standard process flows include JM38510 (JANB), DESC Military Drawings, and JEDEC Publication 101 Class B (SNJ, JBP, SMJ, B). These flows are backed by a comprehensive Quality Conformance program summarized annually in the Military Products Reliability report.

Texas Instruments is in full support of government and industry standardization programs. To this end, a wide range of products is available processed per the above standard flows. Particular emphasis is being placed on both JM38510 and DESC Military Drawings.

<b>Contents</b>	<b>Page</b>
Overview .....	5-2
Military Product Flows .....	5-2
Logic Nomenclature .....	5-2
Programmable Array Logic Nomenclature .....	5-3
Linear Control Circuits Nomenclature .....	5-4
LinCMOS Op Amp Nomenclature .....	5-4
Interface Circuits Nomenclature .....	5-5
Bipolar Memory Nomenclature .....	5-6
MOS Memory Nomenclature .....	5-7
Digital Signal Processor Nomenclature .....	5-7
Microprocessor/Peripheral Nomenclature .....	5-8
JM38510/JANB Part Numbers .....	5-9
Packages .....	5-10
DESC Military Drawings .....	5-11
JAN Integrated Circuits and Generic Type Cross Reference .....	5-12
Generic Type and JAN Device Cross-Reference Guide .....	5-20
DESC Cross-Reference Guide .....	5-24



## OVERVIEW

PRODUCT LINE	PROCESSING FLOWS	TYPES
Logic	SN, SNJ, JANB	54TTL 54S 54LS 54ALS 54AS 54HC 54HCT
	B	PAL®
Linear	SN, SNJ, JANB, B	Interface, Control
MOS Memory	SMJ	EPROM, DRAM, SRAM
Bipolar Memory	JBP, SNJ	PROM, RAM
Microprocessor	SMJ N	32010 9989

PAL® is a registered trademark of Monolithic Memories, Inc.

## MILITARY PRODUCT FLOWS

PROCESS LEVEL	PREFIX SUFFIX	DESCRIPTION
JM38510 Class B	JANB	Qualified per MIL-M-38510 Class B. Produced in DESC certified production facilities.
DESC	SNJ, B	Certified and symbolized to the DESC Military Drawing where TI is an approved source.
Class B	SNJ, B	Screened per requirements of MIL-STD-883 Class B Method 5004. Conforms to the requirements of JEDEC Publication 101. (For detailed screening information, see Military Products Designers Reference Guide (SG42001).)
Military Temperature Range	SN54	Standard Commercial Processing

## LOGIC NOMENCLATURE

Example: SNJ 54 LS00 J

### Prefix

- SN = Standard Prefix, Commercial Processing
- SNJ = Class B Process Option
- JANB = JM38510 Qualified

### Military Temperature Range

- 54 = -55°C to 125°C

### Circuit Designator

- Blank = Standard TTL
- LS = Low-Power Schottky TTL
- S = Schottky TTL
- ALS = Advanced Low-Power Schottky TTL
- AS = Advanced Schottky TTL
- HC = High-Speed CMOS
- HCT = TTL-compatible HCMOS

### Package


- J = C-DIP
- JT = 24-pin, 300-mil C-DIP
- FK = LCCC
- W = Flatpack

5

Military Products


# PROGRAMMABLE ARRAY LOGIC NOMENCLATURE

## PAL® Nomenclature (Industry Leadership Part Types)

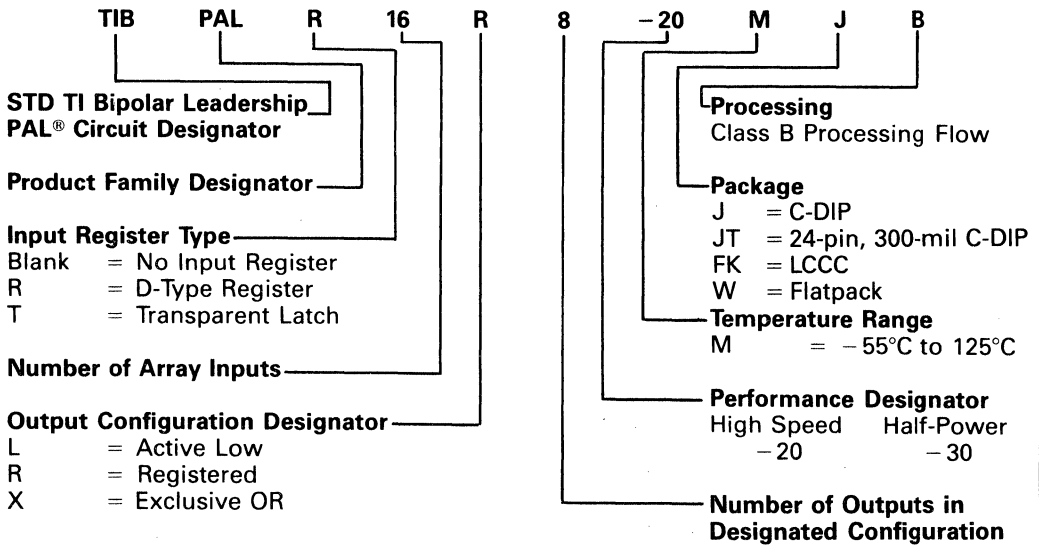

PAL — Registered trademark of Monolithic Memories Inc.

## PAL® Nomenclature (Industry Standard Part Types)

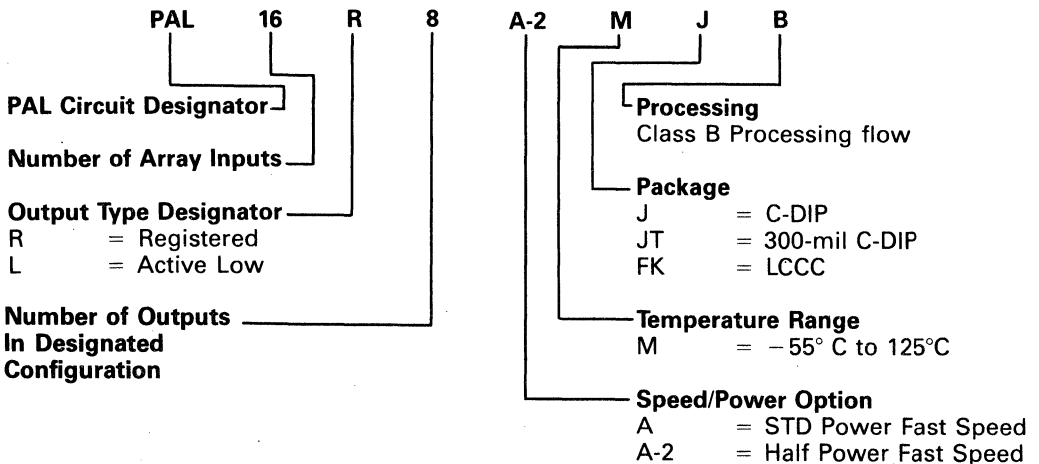

**5**  
Military Products

# LINEAR CONTROL CIRCUITS NOMENCLATURE

Example: TL 074 M J B

**Prefix**

- TL = Linear
- TLC = LinCMOS

**Second Source Prefix**

- LM = National
- MC = Motorola
- RM = Raytheon
- SE = Signetics
- SG = Silicon General
- μA = Fairchild

**Unique Device Designation**

Possibly with A or B in Last Position

**Military Temperature Range**

-55°C to 125°C

**Package Designation**

- FK = LCCC
- J = 14/16-Pin C-DIP
- JG = 8-Pin C-DIP
- U = 10-Lead Flatpack
- W = 14-Lead Flatpack

**Processing**

- B - Class B
- No Letter = STD

5

Military Products

## LinCMOS OP AMP NOMENCLATURE

Example: TLC 27 M 4

**Prefix**

- TLC = LinCMOS

**Circuit Designation**

**Bias Current**

- L = Low
- M = Medium
- No Letter = High

**Device Complexity**

- 1 = Single
- 2 = Dual
- 4 = Quad

A M J B

**Processing**

- B = Class B
- No Letter = STD

**Package Designation**

- FK = LCCC
- J = 14-Pin C-DIP
- JG = 8-Pin C-DIP

**Military Temperature Range**

-55°C to 125°C

**Input Offset Voltage**

- A = 5 mV
- B = 2 mV
- No Letter = 10 mV

---

## INTERFACE CIRCUITS NOMENCLATURE

Example: SNJ 55 109A J

**Prefix**

SN = Standard  
SNJ = Class B Processing

**Second Source Prefix**

AM = AMD  
DS = National  
MC = Motorola

**Operating Temperature Range**

55 = Military  
-55°C to 125°C

**Unique Device Designation**

Possibly with A or B in Last Position

**Package Designation**

FK = LCCC  
J = 14/16-Pin C-DIP  
JG = 8-Pin C-DIP  
W = 14/16-Lead Flatpack

# BIPOLAR MEMORY NOMENCLATURE

These two digits comprise the series designation

Example:

JBP

2

8

S

4

2

M

J

Prefix

JBP = Class B processing,  
JEDEC Publication 101

Generic Programming Family

- 1 = Single Level
- 2 = Double Level
- 3 = Oxide Isolated
- 4 = Other

Output Word Width

4 or 8

Output Type

- S = Standard Three-State
- L = Low-Power Three-State
- R = Registered Three-State
- SA = Standard open-collector

Bit Complexity

- 03 = 256 Bits
- 1 = 1,024 Bits
- 2 = 2,048 Bits
- 4 = 4,096 Bits
- 8 = 8,192 Bits
- 16 = 16,384 Bits
- 32 = 32,768 Bits

Package

- J/JT = Ceramic Dual-in-Line
- FK/FG = Ceramic Chip Carrier

Temperature Range

M = -55°C to 125°C

Package Size<sup>†</sup>

Row Spacing in  
Inches (mm)

No. of Pins	0.300 (7,62)	0.400 (10,16)	0.600 (15,24)
16	0	—	—
18	1	—	—
20	2	—	—
22	3	4	—
24	5	—	6
28	—	—	7
40	—	—	8

<sup>†</sup> Package-size designation is not applicable with chip carrier (FK or FG) and should be replaced with the letter X for this package type.

5

Military Products

---

## MOS MEMORY NOMENCLATURE

Example: SMJ 4164 -15 JD S

### Prefix

SM = Standard Prefix, Commercial Processing  
SMJ = Class B Processing, JEDEC Publication 101

### Circuit Designator

Must contain four characters

### Access Time

Device types are available with various speeds

### Package

Must contain one or two letters J, JD, FG

### Temperature Range

Must contain one letter only

M = -55° to 125°C  
S = -55° to 100°C (except 4164 & 4256 which are -55°C to 110°C)  
E = -40° to 85°C  
L = 0° to 70°C

## DIGITAL SIGNAL PROCESSOR NOMENCLATURE

SMJ 320 10 JD S

### Prefix

SM  
SMJ = Class B Processing

### 320 DSP Family Designator

### 320 DSP Family Member Designator

### Package

JD = Side-Brazed DIP  
FD = LCCC

### Temperature Range

L = 0°C to 70°C  
S = -55°C to 100°C

---

## MICROPROCESSOR/PERIPHERAL NOMENCLATURE

Example:

SBP

9989

N

J

**Prefix**

Must contain three letters  
SBP

**Circuit Designator**

Must contain four digits  
9989 = Advanced 4.4 MHz 16-bit processor

**Temperature Range**

Must contain one letter only  
N = -55°C to 125°C

**Package**

Must contain one or two letter — J,FD

5


Military Products

## JM38510/JANB

Texas Instruments devices listed as JANB and marked JM38510 are qualified and have government endorsement under MIL-M-38510. These products are in full compliance with the military detail specifications and are listed on the Qualified Products List (QPL). They are produced in DESC certified production facilities.

### PART NUMBER CROSS REFERENCE GUIDE

Example: 5400 TTL NAND gate in ceramic dual-in-line package to JM38510 Class B with standard solder dipped leads.

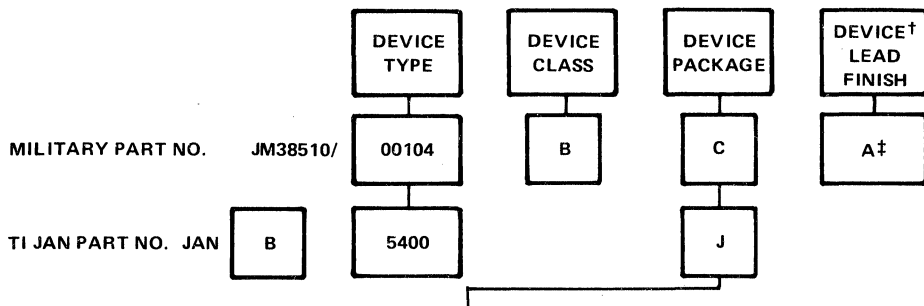

CASE OUTLINE

JAN CODE	38510 APP/C	DESCRIPTION	TI CODE	JAN CODE	38510 APP/C	DESCRIPTION	TI CODE
A	F-1	14-Pin F/P 1/4" x 1/4"	NA	K	F-6	24-Pin F/P 3/8" x 5/8"	W (Note 1)
B	F-3	14-Pin F/P 3/16" x 1/4"	NA	L	D-9	24-Pin CDIP (300 MIL)	JT
C	D-1	14-Pin CDIP	J	M	A-3	12-Pin CAN (TO-101)	NA
D	F-2	14-Pin F/P 1/4" x 3/8"	J	P	D-4	8-Pin CDIP	JG
E	D-2	16-Pin CDIP	W	Q	D-5	40-Pin CDIP	NA
F	F-5	16-Pin F/P 1/4" x 3/8"	J	R	D-8	20-Pin CDIP	J
G	A-1	8-Pin CAN (TO-99)	W	S	F-9	20-Pin F/P 1/4" x 1/2"	W
H	F-4	10 Pin F/P 1/4" x 1/4"	NA	V	D-6	18-Pin CDIP	NA
I	A-2	10 Pin CAN (TO-100)	NA	2	C-2	20-Pad Sq Chip Carrier	FD/FK
J	D-3	24-Pin CDIP	J	3	C-4	28-Pad Sq Chip Carrier	FD/FK

† Solder dip lead finish normally supplied by TI.

‡ Lead finish designators: A = solder dip, B = gold plate.

NOTE 1: 24-pin flatpack (W, WC, RA) dimensions may vary from F-6 outline in Appendix C of MIL-M-38510E. Refer to appropriate TI data book.

5

Military Products



## PACKAGES

The packages offered by Military products are designed to provide the most efficient and cost-effective method of meeting systems requirements. Products are offered in ceramic dual-in-line packages, flatpacks, and leadless ceramic chip carriers.

### PACKAGES AVAILABLE

PACKAGE	DESCRIPTION
FD	Three-Layer Square Chip Carrier — Non-JEDEC Pinouts
FG, FV	Three-Layer Rectangular Chip Carrier — JEDEC Pinouts
FJ	J Formed Ceramic Leaded Chip Carrier
FK	Three-Layer Square Chip Carrier — JEDEC Pinouts
J, JG, JT	Ceramic DIP
JD	Side Braze Ceramic DIP
W, WA, WC, U	Ceramic Flatpack (Note 1)

### STANDARD PACKAGES BY PRODUCT LINE

PACKAGE	LOGIC	LINEAR	BIPOLAR MEMORY	MOS MEMORY	MICROPROCESSOR
FD					•
FG				•	
FJ		•			•
FK	ALS, AS, HC, HCT, LS, S	•	•		•
FV				•	
J	All	•	•	•	•
JD				•	•
JG		•			
JT	ALS, AS, HC, HCT, LS		•		
W	All	•			
WC		•			
U		•			

NOTE 1: The 24-Pin flatpack (WC) dimensions may vary from F-6 outline in Appendix C of MIL-M-38510F. Refer to appropriate TI data book.

5

Military Products

# DESC MILITARY DRAWINGS

The DESC Military Drawing program provides industry standard specifications in compliance with Class B requirements for devices that are not JAN qualified. Texas Instruments fully supports the DESC Military Drawing Program. Refer to approved product listing.

## DESC SELECTED ITEM DRAWING NOMENCLATURE

Example:

5962-85155

or

Drawing Number \_\_\_\_\_ 82005 01 F A

Device \_\_\_\_\_

Package \_\_\_\_\_

- A = 14-pin flatpack (1/4" × 1/4")
- B = 14-pin flatpack (3/16" × 1/4")
- C = 14-pin DIP
- D = 14-pin flatpack
- E = 16-pin DIP
- F = 16-pin flatpack
- G = 8-pin can
- H = 10-pin flatpack
- I = 10-pin can
- J = 24-pin DIP
- K = 24-pin flatpack
- L = 24-pin DIP (300 mil)
- M = 12-pin can
- P = 8-pin DIP
- Q = 40-pin DIP
- R = 20-pin DIP
- S = 20-pin flatpack
- V = 18-pin DIP
- W = 22-pin DIP
- 2 = 20-pad LCC
- 3 = 28-pad LCC

Lead Finish \_\_\_\_\_

- A = Solder Dip
- B = Tin Plate
- C = Gold Plate

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.
00101	5430	01202	54122	02401	54H40
00102	5420	01203	54123	02501	54L90
00103	5410	01204	9601	02502	54L93
00104	5400	01205	9602	02503	54L193
00105	5404			02504	93L10
00106	5412	01301	5492	02505	93L16
00107	5401	01302	5493		
00108	5405	01303	54160	02601	54L86
00109	5403	01304	54163		
		01305	54162	02701	54L02
00201	5472	<b>01306</b>	<b>54161</b>		
00202	5473	01307	5490	02801	54L95
00203	54107	01308	54192	02802	54L164
00204	5476	01309	54193	02803	93L28
00205	5474			02804	93L00
00206	5470	01401	54150	02805	76L70
00207	5479	01402	9312		
		01403	54153	02901	54L42
00301	5440	01404	9309	02902	54L43
00302	5437	01405	9322	02903	54L44
00303	5438	01405	54157	02904	54L46
		01406	54151	02905	54L47
00401	5402			02906	76L42A
00402	5423	01501	5475	02907	93L01
00403	5425	01502	5477		
00404	5427	01503	9308	03001	930
		01503	54116	03002	940
00501	5450	01504	9314	03002	935
00502	5451			03003	936
00503	5453	01601	5408	03004	946
00504	5454	01602	5409	03005	962
00601	5482	<b>01701</b>	<b>54174</b>	03101	932
00602	5483	<b>01702</b>	<b>54175</b>	03102	944
00603	9304			03103	957
00604	5480	01801	54170	03104	958
				03105	933
00701	5486	01901	54180		
				03201	951
00801	5406	02001	54L30	03301	945
00802	5416	02002	54L20	03302	948
00803	5407	02003	54L10	03303	950
00804	5417	02004	54L00	03304	9093
00805	5426	02005	54L04		
		02006	54L03	03501	MH0026
00901	5495	02006	54L01		
00902	5496			04001	54H50
00903	54164	02101	54L71	04002	54H51
00904	54165	02102	54L72	04003	54H53
00905	54194	02103	54L73	04004	54H54
00906	54195	02104	54L78	04005	54H55
		02105	54L74		
01001	5442			04101	54L51
01002	5443	02201	54H72	04102	54L54
01003	5444	02202	54H73	04103	54L55
01004	5445	02003	54H74		
01005	54145	02204	54H76	04201	54L121
01006	5446	02205	54H101	04202	54L122
01007	5447	02206	54H103		
01008	5448			04301	93L18
01009	5449	02301	54H30		
		02302	54H20	04401	93L24
01101	54181	02303	54H10		
01101	9341	02304	54H00	04501	93L14
01102	54182	02305	54H04	04502	93L08
01102	9342	02306	54H01		
		02307	54H22		

5

Military Products

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.
04601	93L09
04602	93L12
04603	93L22
05001	4011A
05002	4012A
05003	4023A
05051	4011B
05052	4012B
05053	4023B
05101	4013A
05102	4027A
05103	4043A
05151	4013B
05152	4027B
05153	4043B
05201	4000A
05202	4001A
05203	4002A
05204	4025A
05251	4000B
05252	4001B
05253	4002B
05254	4025B
05301	4007A
05302	4019A
05303	4030A
05304	4048A
05351	4007UB
05352	4019B
05353	4030B
05354	4048B
05401	4008A
05451	4008B
05501	4009A
05502	4010A
05503	4049A
05504	4050A
05505	4041A
05551	4009UB
05552	4010B
05553	4049UB
05554	4050B
05555	4041UB
05601	4017A
05602	4018A
05603	4020A
05604	4022A
05605	4024A
05651	4017B
05652	4018B
05653	4020B
05654	4022B
05655	4024B
05701	4006A
05702	4014A
05703	4015A
05704	4021A
05705	4031A
05706	4034A

Military Device Type M38510/	Generic Industry No.
05751	4006B
05752	4014B
05753	4015B
05754	4021B
05755	4031B
05756	4034B
05801	4016A
05802	4066A
05851	4016B
05852	4066B
05901	4028A
05951	4028B
06001	10501
06002	10502
06003	10505
06004	10506
06005	10507
06006	10509
06101	10531
06102	10631
06103	10576
06104	10535
06201	10504
06202	10597
06301	10524
06302	10525
<b>07001</b>	<b>54S00</b>
<b>07002</b>	<b>54S03</b>
<b>07003</b>	<b>54S04</b>
<b>07004</b>	<b>54S05</b>
<b>07005</b>	<b>54S10</b>
<b>07006</b>	<b>54S20</b>
<b>07007</b>	<b>54S22</b>
<b>07008</b>	<b>54S30</b>
07009	54S133
07010	54S134
<b>07101</b>	<b>54S74</b>
<b>07102</b>	<b>54S112</b>
07103	54S113
07104	54S114
<b>07105</b>	<b>54S174</b>
<b>07106</b>	<b>54S175</b>
07201	54S40
<b>07301</b>	<b>54S02</b>
07401	54S51
<b>07402</b>	<b>54S64</b>
07403	54S65
<b>07501</b>	<b>54S86</b>
07502	54S135
<b>07601</b>	<b>54S194</b>
07602	54S195
<b>07701</b>	<b>54S138</b>
07702	54S139

Military Device Type M38510/	Generic Industry No.
07801	54S181
<b>07802</b>	<b>54S182</b>
<b>07901</b>	<b>54S151</b>
<b>07902</b>	<b>54S153</b>
<b>07903</b>	<b>54S157</b>
<b>07904</b>	<b>54S158</b>
07905	54S251
<b>07906</b>	<b>54S257</b>
07907	54S258
07908	54S253
<b>08001</b>	<b>54S11</b>
08002	54S15
08003	54S08
08004	54S09
08101	54S140
<b>08201</b>	<b>54S85</b>
10101	741A
10102	747A
10103	LM101A
10104	LM108A
10105	LH2101A
10106	LH2108A
10107	LM118
10108	1558
10201	LM723
10301	710
10302	711
10303	LM106
10304	LM111
10305	LH2111
<b>10401</b>	<b>55107</b>
<b>10402</b>	<b>55108</b>
<b>10403</b>	<b>55114</b>
10403	9614
10404	9615
<b>10404</b>	<b>55115</b>
<b>10405</b>	<b>55113</b>
10406	7831
10407	7832
10501	5040
10502	5041
10503	5042
10504	5043
10505	5044
10506	5045
10507	5046
10508	5047
10601	LM102
10602	LM110
10603	LH2110
10701	LM109
10702	LM140H-05
10702	78M05
10703	LM140H-12
10703	78M12
10704	LM140H-15

**5**  
Military Products

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.
10704	78M15	11604	303	12405	LM199A-20
10705	LM140H-24	11605	304	12406	LM129B
10705	78M24	11606	305		
10706	LM140K-05	11607	306	12501	198
10706	7805	11608	307	12502	5537
10707	LM140K-12				
10707	7812	11701	78MG	12601	1524
10708	LM140K-15	11702	78G		
10708	7815	11703	LM117H	12701	7523
10709	LM140K-24	11704	LM117K	12702	7520
10709	7824	11705	LM150K	12703	7521
		11706	LM138K	12704	7541
10801	3018A			12705	1020
10802	3045	11801	79MG	12706	1220
		11802	79G	12707	1218
10901	555	11803	LM137H		
10902	556	11804	LM137K	12801	584S
10903	555 (I <sub>SOURCE</sub> = 60 mA)			12802	584T
11001	LM148	11901	061	12901	55450
11002	LM149	11902	062	12902	55451B
11003	4741, 4156	11903	064	12903	55452B
11004	4136	11904	071	12904	55453B
11005	LM124	11904	LF151	12905	55454B
		11905	072	12906	55460
11101	DG181A	11905	772	12907	55461
11102	DG182A	11905	LF153	12908	55462
11103	DG184A	11906	074	12909	55463
11104	DG185A	11906	774	12910	55464
11105	DG187A	11906	LF147		
11106	DG188A			13001	55325B
11107	DG190A	12001	5200	13002	55326A
11108	DG191A	12002	5203	13003	55327A
		12003	5201		
11201	LM139	12004	5204	13101	5534A
11202	LM193	12005	5202	13102	5532A
		12006	5205		
11301	DAC-08	12007	5206	13301	561
11302	DAC-08A	12008	5207		
		12009	5210	13401	ADC571
11401	LF155	12010	5213		
11402	LF156	12011	5211	13501	OP-07A
11403	LF157	12012	5214	13502	OP-07, 714
11404	LF155A	12013	5212	13503	OP-27A
11405	LF156A	12014	5215	13504	OP-227A
11406	LF157A	12015	5216		
		12016	5217	13601	2700
11501	LM120H-05			13601	R675B-4
11501	79M05	12101	562	13602	2702
11502	LM120H-12	12102	563	13602	R675B-3
11502	79M12	12103	565		
11503	LM120H-15	12104	566	13701	DAC87 (Hybrid)
11503	79M15			13702	DAC87 (Monolithic)
11504	LM120H-24	12201	2700	13703	DAC87 (Hybrid)
11504	79M24	12202	2600		
11505	LM120K-05	12203	2620	13901	534T
11505	7905	12204	2500	13902	534S
11506	LM120K-12	12205	2510	13903	532S
11506	7912	12206	2520		
11507	LM120K-15			14103	2003
11507	7915	12301	200		
11508	LM120K-24	12302	201	15001	5485
11508	7924			15002	9324
		12401	LM199A		
11601	300	12402	LM129A	15101	5413
11602	301	12403	REF10	15102	5414
11603	302	12404	LM199	15103	54132

5

Military Products

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.
15201	54154
15201	9311
15202	54155
15203	54156
15204	8250
15205	8251
15206	8252
15206	9301
15301	54125
15302	54126
15501	54H08
15502	54H11
15503	54H21
15504	54H08
15601	54147
15602	54148
15603	9318
15701	9338
15801	9321
15802	9317
15901	9300
15902	9328
16001	9334
16101	5432
16201	5428
16301	54365
16302	54366
16303	54367
16304	54368
17001	4081B
17002	4082B
17003	4073B
17101	4071B
17102	4072B
17103	4075B
17201	4085B
17202	4086B
17203	4070B
17204	4077B
17301	4514B
17302	4515B
17303	4532B
17304	4555B
17305	4556B
17401	4069UB
17402	40107B
17403	4502B
17404	40109B
17501	4076B
17502	4095B
17503	4096B

Military Device Type M38510/	Generic Industry No.
17504	4098B
17505	40174B
17601	4099B
17602	4508B
17701	4093B
17702	40106B
17801	4067B
17802	4097B
17803	40257B
19001	506
19001	6116
19002	506A
19003	507
19003	6216
19004	507A
19005	508A
19006	509A
19007	508
19007	6108
19008	509
19008	6208
20101	HPROM-0512
20101	MCM5303
20102	MCM5304
20201	IM5603A
20202	IM5623
20301	7610
20301	5300-1
20301	82S126
20301	93417
20302	7611
20302	5301-1
20302	54S287
20302	82S129
20302	93427
20401	7620
20401	5303-1
20401	82S130
20401	93436
20402	7621
20402	5306-1
20402	82S131
20402	93446
20601	7642
20601	5352-1
20601	82S136
20601	93452
20602	7643
20602	5353-1
20602	82S137
20602	93453
20603	7644
20701	7602
20701	5330
20701	82S23
20702	7603
20702	5331
20702	82S123

Military Device Type M38510/	Generic Industry No.
20801	7640
20801	5340-1
20801	82S140
20801	93438
20802	5341-1
20802	54S474
20802	7641
20802	82S141
20802	93448
20803	82S115
20804	5348-1
20805	5349-1
20901	53S480
20901	7684
20901	77S184
20901	82S184
20902	29651
20902	53S841
20902	7685
20902	77S185
20902	82S185
20903	27S180
20903	77S180
20903	7680
20903	5380-2
20903	82S180
20903	93450
20904	27S181
20904	77S181
20904	29631
20904	7681
20904	5381-2
20904	82S181
20904	93451
20905	82S2708
20905	93461
20906	93460
20907	53S840
20908	53S841
20908	29651
21001	77S190
21001	76160
21001	53S1680
21001	82S190
21002	77S191
21002	93Z511
21002	27S191
21002	28S166A
21002	76161
21002	53S1681
21002	82S191
21002	3636
21002	29681
21003	93Z510
21004	93Z511
21004	28S166A
21005	76165
21901	6654
22001	2708
22101	2716
22201	2532

**5**  
Military Products

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.
22601	NMC2816	23711	AM9140CFM	30101	54LS73A
23001	93410	23711	AM9140CDM	30102	54LS74A
23002	93421	23712	AM9140AFM	30103	54LS112
23003	93411	23712	AM9140ADM	30104	54LS113A
23004	93L420	23713	AM91L40CFC	30105	54LS114A
23101	93415	23714	AM91L40AFC	30106	54LS174
	60 ns ( $t_{WHAC} = 5$ ns,	23715	AM91L40CFM	30107	54LS175
	$t_{AVWL} = 15$ ns)	23715	AM91L40CDM	30108	54LS107A
23102	93425	23716	AM91L40AFM	30109	54LS109A
	60 ns ( $t_{WHAC} = 5$ ns,	23716	AM91L40ADM	30110	54LS76A
	$t_{AVWL} = 15$ ns)	23801	2147	30201	54LS40
23103	93L415 70 ns	23802	2114	30202	54LS37
23104	93L425 70 ns	23803	2147H	30203	54LS38
23105	93415	23804	2114A	30204	54LS28
	60 ns ( $t_{WHAC} = 10$ ns,	23805	2147H-3	30301	54LS02
	$t_{AVWL} = 10$ ns)	23806	2148H	30302	54LS27
23106	93425	23807	2147H-2	30303	54LS266
	60 ns ( $t_{WHAC} = 10$ ns,	23901	6508	30401	54LS51
	$t_{AVWL} = 10$ ns)	23901	54C929	30401	9LS51
23107	93415 45 ns	23902	6518	30402	54LS54
23107	82S10 45 ns	23902	54C930	30402	9LS54
23108	93425A 45 ns	24001	2117	30501	54LS32
23108	82S11 45 ns	24001	(200 ns access time)	30502	54LS86
23109	93412 60 ns	24001	4116	30601	54LS194A
23110	93422 60 ns	24001	(200 ns access time)	30602	54LS195A
23111	93L412 75 ns	24002	2117	30603	54LS95B
23112	93L422 75 ns	24002	(250 ns access time)	30604	54LS96
23113	93L425A 50 ns	24002	4116	30605	54LS164
23114	93422A 45 ns	24003	(250 ns access time)	30606	54LS295B
23115	93L422A 55 ns	24003	2117	30607	54LS395A
23201	93419		(200 ns page mode operation guaranteed)	30608	54LS165A
23301	93470	24003	4116	30609	54LS166A
23302	93471		(200 ns page mode operation guaranteed)	30701	54LS138
23501	TMS4060 (85°C Max)	24401	2164 (1 ms refresh)	30702	54LS139
23502	TMS4050 (85°C Max)	24401	4564 (1 ms refresh)	30703	54LS42
23503	TMS4060 (100°C Max)	24401	6665 (1 ms refresh)	30704	54LS47
23504	TMS4050 (100°C Max)	24401	8264 (1 ms refresh)	30801	54LS181
23505	MM5280 (85°C Max)	24402	2164 (2 ms refresh)	30901	54LS151
23506	MM5280 (100°C Max)	24402	4564 (2 ms refresh)	30902	54LS153
23601	MCM6605 (85°C Max)	24402	6665 (2 ms refresh)	30903	54LS157
23602	MCM6604A (85°C Max)	24402	8264 (2 ms refresh)	30904	54LS158
23602	MKB4096 (85°C Max)	24501	6504	30905	54LS251
23603	MCM6605 (100°C Max)	24502	6514	30906	54LS257B
23604	MCM6604A (100°C Max)	29101	6116, 65162	30907	54LS258B
23604	MKB4096 (100°C Max)	29102	6516	30908	54LS253
23701	AM9130CFC	29103	65262	30909	54LS298
23702	AM9130AFC	29104	6116, 65162	31001	54LS11
23703	AM9130CFM	29105	6116, 65162	31002	54LS15
23703	AM9130CDM	29106	51C67	31003	54LS21
23704	AM9310AFM	30001	54LS00	31004	54LS08
23704	AM9130ADM	30002	54LS03	31005	54LS09
23704	AM9130AFM	30003	54LS04	31101	54LS85
23705	AM91L30CF	30004	54LS05	31201	54LS83A
23706	AM91L30AF	30005	54LS10	31202	54LS283
23707	AM91L30CFM	30006	54LS12		
23707	AM91L30CDM	30007	54LS20		
23708	AM91L30AFM	30008	54LS22		
23708	AM91L30ADM	30009	54LS30		
23708	AM91L30AFM				
23709	AM9140CFC				
23710	AM9140AFC				

5

Military Products

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.
31302	54LS14	32803	54LS245	35002	54F399
31303	54LS132	32804	54LS646	36001	54LS148
		32805	54LS648	36002	54LS348
31401	54LS123	32901	54LS280	36101	54LS173A
31402	54LS221			37001	54ALS00A
31403	54LS122	33001	54F00	37002	54ALS10
31501	54LS90	33002	54F04	37003	54ALS20A
31502	54LS93	33003	54F10	37004	54ALS30
31503	54LS160A	33004	54F20	35005	54ALS133
31504	54LS161A	33106	25LS174	37006	54ALS04A
31505	54LS168	33107	25LS175	37101	54ALS74A
31506	54LS169A			37102	54ALS109A
31507	54LS192	33201	54F240	37103	54ALS112A
31508	54LS193	33202	54F241	37104	54ALS574
31509	54LS191	33203	54F244	37105	54ALS576
31510	54LS92			37106	54ALS874
31511	54LS162A	33301	54F02	37107	54ALS876
31512	54LS163A	33401	54F64	37201	54ALS174
31513	54LS190	33501	54F32	37202	54ALS175
31601	54LS75	33601	54F194	37203	54ALS373
31602	54LS279			37204	54ALS374
31603	54LS259	33701	54F138	37301	54ALS02
31604	54LS375	33702	54F139	37302	54ALS27
31605	54LS259B			37401	54ALS08
31801	54LS261	33901	54F151	37402	54ALS11
31901	54LS670	33902	54F153	37501	54ALS32
31902	54LS170	33903	54F157	37601	54ALS299
32001	54LS196	33904	54F158	37602	54ALS323
32002	54LS197	33905	54F251	37701	54ALS138
32003	54LS290	33906	54F257	37901	54ALS857
32004	54LS293	33907	54F258		
		33908	54F253	38001	54ALS161
32102	54LS26	33909	54F352	38002	54ALS163
		33910	54F353	38003	54ALS169B
32201	54LS365A	34001	54F08	38004	54ALS561
32202	54LS366A	34002	54F11	38005	54ALS569
32203	54LS367A	34101	54F074	38101	54ALS160
32204	54LS368A	34102	54F109	38102	54ALS162
32301	54LS125A	34103	54F112	38103	54ALS168
32302	54LS126A	34104	54F175	38104	54ALS560
		34105	54F374	38105	54ALS568
32401	54LS240	34106	54F534	38201	54ALS573
32402	54LS241	34107	54F174	38202	54ALS580
32403	54LS244			38203	54ALS873
32404	54LS540	34201	54F283	38204	54ALS880
32405	54LS541	34501	54F086	38301	54ALS240A
32501	54LS273			38302	54ALS241A
32502	54LS373	34601	54F373	38303	54ALS244A
32503	54LS374	34602	54F533	38401	54ALS1000A/54ALS37
32504	54LS377			38402	54ALS1002A/54ALS28
32601	54LS155A	34701	54F521	38403	54ALS1003/54ALS38
32602	54LS156			38404	54ALS1008
32701	54LS390	34801	54F242		
32702	54LS393	34802	54F243		
32703	54LS490	34803	54F245		
32801	54LS242	34901	54F280		
32802	54LS243	35001	54F398		



# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.
38405	54ALS1010	47601	1856	54001	MC68000-6
38406	54ALS1011	47602	1857	54002	MC68000-8
38407	54ALS1020A/54ALS40			65001	54HC00
38408	54ALS1032	48001	Z-80A CPU	65002	54HC10
38409	54ALS1004	48002	Z-80 CPU	65003	54HC20
38410	54ALS1005	48003	Z-80B CPU	65004	54HC30
38411	54ALS1034			65005	54HC132
38412	54ALS1035	48101	Z-80A S10/2		
		48102	Z-80 S10/2	65101	54HC02
38501	54ALS640			65102	54HC27
38502	54ALS641	48201	Z-80A DMA	65103	54HC266
38503	54ALS642	48202	Z-80 DMA	65104	54HC4002
38504	54ALS643			65105	54HC7266
38505	54ALS645	48301	Z80A CTC		
38506	54ALS242	48302	Z80 CTC	65201	54HC32
38507	54ALS243			65202	54HC86
		48401	Z80A P10	65203	54HC08
40001	6800	48402	Z80 P10	65204	54HC11
40101	MC6821	49001	8048		
		49002	8035L	65301	54HC73
40201	6810			65302	54HC74
		50001	TDC1008JM	65303	54HC107
40301	2316E	50002	TDC1009JM	65304	54HC109
40301	2616	50003	TDC1010JM	65305	54HC112
40301	3516E	50004	MPY-8HJM	65306	54HC173
40301	9218	50005	MPY-12HJM	65307	54HC174
40301	S6831B	50006	MPY-16HJM	65308	54HC175
40301	MK34000			65601	54HC273
40301	52116	50201	82S101	65602	54HC374
40301	68A316E	50201	93458	65603	54HC377
		50202	82S100	65604	54HC574
42001	8080A	50202	93459	65605	54HC534
				65606	54HC564
42101	8212	50301	PAL10H8	65701	54HC04
42101	54S412	50302	PAL12H6	65702	54HC14
		50303	PAL14H4	65703	54HC240
42201	8224	50304	PAL16H2	65704	54HC241
		50305	PAL16C1	65705	54HC244
42301	8228	50306	PAL10L8	65706	54HC365
		50307	PAL12L6	65707	54HC366
44001	2901B	50308	PAL14L4	65708	54HC367
		50309	PAL16L2	65709	54HC368
44101	2905			65710	54HC540
44102	2906	50401	PAL16L8A	65711	54HC541
44103	2907	50402	PAL16R8A	65712	54HC4049
44104	2915	50403	PAL16R6A	65713	54HC4050
44105	2916	50404	PAL16R4A		
44106	2917	50405	PAL16X4		
		50406	PAL16A4		
44201	2918	50407	PAL16L8A-2		
		50408	PAL16R8A-2		
46001	9900A	50409	PAL16R6A-2		
		50410	PAL16R4A-2		
46501	SBP9989				
47001	1802D	50501	PAL20L8A	65401	54HC75
		50502	PAL20R8A	65402	54HC259
		50503	PAL20R6A	65403	54HC373
47101	1821	50504	PAL20R4A	65404	54HC533
47102	1822			65405	54HC563
				65406	54HC573
47201	1832	52001	Z8001CPU	65501	54HC242
		52002	Z8002CPU	65502	54HC243
		52003	Z8001ACPU	65503	54HC245
47301	1852	52004	Z8002ACPU	65504	54HC620
				65505	54HC623
47401	1853			65506	54HC640

\*Tentative Assignments

# JAN INTEGRATED CIRCUITS AND GENERIC TYPE CROSS-REFERENCE

## Military Device Type M38510/ to Generic/Industry No.

Military Device Type* M38510/	Generic Industry No.
65507	54HC643
65508	54HC646
65509	54HC648
65801	54HC42
65802	54HC138
65803	54HC139
65804	54HC154
65805	54HC238
65901	54HC123
65902	54HC221
66001	54HC147
66002	54HC148
66101	54HC85
66102	54HC682
66103	54HC684
66104	54HC686
66105	54HC688
66201	54HC151
66202	54HC153
66203	54HC157
66204	54HC158
66205	54HC251
66206	54HC253
66207	54HC257
66208	54HC354
66209	54HC356
66301	54HC160
66302	54HC161
66303	54HC162
66304	54HC163
66305	54HC191
66306	54HC192
66307	54HC193
66308	54HC390
66309	54HC393
66310	54HC4017
66311	54HC4020
66312	54HC4024
66313	54HC4040
66314	54HC4520
66401	54HC590
66402	54HC592
66403	54HC593
66501	54HC164
66502	54HC165
66503	54HC166
66504	54HC194
66505	54HC195
66506	54HC299
66507	54HC595
66508	54HC597
66601	54HC670
66701	54HC283
66801	54HC280

\*Tentative Assignments

# GENERIC TYPE AND JAN DEVICE CROSS-REFERENCE GUIDE

## Generic Industry No. to Military Device Type M38510

Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/
061	11901	2907	44103	4027B	05152
062	11902	2915A	44104	4028A	05901
064	11903	2916A	44105	4028B	05951
071	11904	2917A	44106	4030A	05303
072	11905	2918	44201	4030B	05353
074	11906	29681	21002	4031A	05705
198	12501	25LS174	33106	4031B	05755
1020	12705	25LS175	33107	4034A	05706
1218	12707	300	11601	4034B	05756
1220	12706	301A	11602	4041A	05505
1524	12601	302A	11603	4041UB	05555
1558	10108	303A	11604	4043A	05103
1802D	47001	304A	11605	4043B	05153
1821	47101	305A	11606	4048A	05304
1822	47102	306A	11607	4048B	05354
1832	47201	307A	11608	4049A	05503
1852	47301	3018A	10801	4049UB	05553
1853	47401	3045	10802	4050A	05504
1856	47601	3516E	40301	4050B	05554
1857	47602	3636	21002	4066A	05802
10501	06001	4000A	05201	4066B	05852
10502	06002	4000B	05251	4067B	17801
10504	06201	4001A	05202	4069UB	17401
10505	06003	4001B	05252	4070B	17203
10506	06004	4002A	05203	4071B	17101
10507	06005	4002B	05253	4072B	17102
10509	06006	4006A	05701	4073B	17003
10524	06301	4006B	05751	4075B	17103
10525	06302	4007A	05301	4076B	17501
10531	06101	4007UB	05351	4077B	17204
10535	06104	4008A	05401	4081B	17001
10576	06103	4008B	05451	4082B	17002
10597	06202	4009A	05501	4085B	17201
10631	06102	4009UB	05551	4086B	17202
200	12301	4010A	05502	4093B	17701
200	12303	4010B	05552	4095B	17502
201	12302	4011A	05001	4096B	17503
201	12304	4011B	05051	4097B	17802
2003	14103	4012A	05002	4098B	17504
2114	23802	4012B	05052	4099B	17601
2114A	23804	4013A	05101	4116	24001
2117	24001	4013B	05151	4116	24002
2117	24002	4014A	05702	4116	24003
2117	24003	4014B	05752	4136	11004
2147	23801	4015A	05703	4156	11003
2147H	23803	4015B	05753	4502B	17403
2147H-2	23807	4016A	05801	4508B	17602
2147H-3	23805	4016B	05851	4514B	17301
2148H	23806	4017A	05601	4515B	17302
2164	24401	4017B	05651	4532B	17303
2164	24402	4018A	05602	4555B	17304
2316E	40301	4018B	05652	4556B	17305
2500-8	12204	4019A	05302	4564	24401
2510-10	12205	4019B	05352	4564	24402
2520-8	12206	4020A	05603	4741	11003
2532	22201	4020B	05653	40106B	17702
2600-8	12202	4021A	05704	40107B	17402
2616	40301	4021B	05754	40109B	17404
2620-8	12203	4022A	05604	40174B	17505
2700	13601	4022B	05654	40257B	17803
2700-8	12201	4023A	05003	506	19001
2702	13602	4023B	05053	506A	19002
2708	22001	4024A	05605	507	19003
2716	22101	4024B	05655	507A	19004
2901C	44001	4025A	05204	508	19007
2905	44101	4025B	05254	508A	19005
2906	44102	4027A	05102	509	19008


**Military Products**

# GENERIC TYPE AND JAN DEVICE CROSS-REFERENCE GUIDE

## Generic Industry No. to Military Device Type M38510

Generic Industry No.	Military Device Type M38510/
509A	19006
532S	13903
534S	13902
534T	13901
555	10901
*555 (I <sub>source</sub> = 60 mA)	10903
556	10902
561	13301
562	12101
563	12102
565	12103
566	12104
584S	12801
584T	12802
5040	10501
5041	10502
5042	10503
5043	10504
5044	10505
5045	10506
5046	10507
5047	10508
51C67	29106
5200	12001
5201	12003
5202	12005
5203	12002
5204	12004
5205	12006
5206	12007
5207	12008
5210	12009
5211	12011
52116	40301
5212	12013
5213	12010
5214	12012
5215	12014
5216	12015
5217	12016
5300-1	20301
5301-1	20302
5305-1	20401
5306-1	20402
5330	20701
5331	20702
5340-1	20801
5341-1	20802
5348-1	20804
5349-1	20805
5352-1	20601
5353-1	20602
5380-2	20903
5381-2	20904
53S1680	21001
53S1681	21002
5400	00104
5401	00107
5402	00401
5403	00109
5404	00105
5405	00108
5406	00801
5407	00803
5408	01601
5409	01602
5410	00103

Generic Industry No.	Military Device Type M38510/
5412	00106
5413	15101
5414	15102
5416	00802
5417	00804
5420	00102
5423	00402
5425	00403
5426	00805
5427	00404
5428	16201
5430	00101
5432	16101
5437	00302
5438	00303
5440	00301
5442	01001
5443	01002
5444	01003
5445	01004
5446	01006
5447	01007
5448	01008
5449	01009
5450	00501
5451	00502
5453	00503
5454	00504
5470	00206
5472	00201
5473	00202
5474	00205
5475	01501
5476	00204
5477	01502
5479	00207
5480	00604
5482	00601
5483	00602
5485	15001
5486	00701
5490	01307
5492	01301
5493	01302
5495	00901
5496	00902
54107	00203
54116	01503
54121	01201
54122	01202
54123	01203
54125	15301
54126	15302
54132	15103
54145	01005
54147	15601
54148	15602
54150	01401
54151	01406
54153	01403
54154	15201
54155	15202
54156	15203
54157	01405
54160	01303
54161	01306
54162	01305

Generic Industry No.	Military Device Type M38510/
54163	01304
54164	00903
54165	00904
54170	01801
54174	01701
54175	01702
54180	01901
54181	01101
54182	01102
54192	01308
54193	01309
54194	00905
54195	00906
54365	16301
54366	16302
54367	16303
54368	16304
54ALS00A	37001
54ALS02	37301
54ALS04A	37006
54ALS08	37401
54ALS10	37002
54ALS11	37402
54ALS20A	37003
54ALS27	37302
54ALS28	38402
54ALS30	37004
54ALS32	37501
54ALS37	38401
54ALS38	38403
54ALS40	38407
54ALS74A	37101
54ALS109A	37102
54ALS112A	37103
54ALS133	37005
54ALS138	37701
54ALS160	38101
54ALS161	38001
54ALS162	38102
54ALS163	38002
54ALS168	38103
54ALS169B	38003
54ALS174	37201
54ALS175	37202
54ALS240A	38301
54ALS241A	38302
54ALS242	38506
54ALS243	38507
54ALS244A	38303
54ALS299	37601
54ALS323	37602
54ALS373	37203
54ALS374	37204
54ALS560	38104
54ALS561	38004
54ALS568	38105
54ALS569	38005
54ALS573	38201
54ALS574	37104
54ALS576	37105
54ALS580	38202
54ALS640	38501
54ALS641	38502
54ALS642	38503
54ALS643	38504
54ALS645	38505
54ALS857	37901

5  
Military Products

# GENERIC TYPE AND JAN DEVICE CROSS-REFERENCE GUIDE

## Generic Industry No. to Military Device Type M38510

Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/
54ALS873	38203	54H11	15502	54L46	02904
54ALS874	37106	54H20	02302	54L47	02905
54ALS876	37107	54H21	15503	54L51	04101
54ALS880	38204	54H22	02307	54L54	04102
<b>54ALS1000A</b>	<b>38401</b>	54H30	02301	54L55	04103
<b>54ALS1002A</b>	<b>38402</b>	54H40	02401	54L71	02101
54ALS1003	38403	54H50	04001	54L72	02102
54ALS1004	38409	54H51	04002	54L73	02103
54ALS1005	38410	54H53	04003	54L74	02105
54ALS1008	38404	54H54	04004	54L78	02104
54ALS1010	38405	54H55	04005	54L86	02601
54ALS1011	38406	54H72	02201	54L90	02501
<b>54ALS1020A</b>	<b>38407</b>	54H73	02202	54L93	02502
54ALS1032	38408	54H74	02203	54L95	02801
<b>54ALS1034</b>	<b>38411</b>	54H76	02204	54L121	04201
54ALS1035	38412	54H101	02205	54L122	04202
54C929	23901	54H103	02206	54L164	02802
54C930	23902	<b>54HC00</b>	<b>65001</b>	54L193	02503
54F00	33001	<b>54HC02</b>	<b>65101</b>	<b>54LS00</b>	<b>30001</b>
54F02	33301	<b>54HC04</b>	<b>65701</b>	<b>54LS02</b>	<b>30301</b>
54F04	33002	<b>54HC08</b>	<b>65203</b>	<b>54LS03</b>	<b>30002</b>
54F08	34001	<b>54HC10</b>	<b>65002</b>	<b>54LS04</b>	<b>30003</b>
54F10	33003	<b>54HC11</b>	<b>65204</b>	<b>54LS05</b>	<b>30004</b>
54F11	34002	54HC14	65702	<b>54LS08</b>	<b>31004</b>
54F20	33004	<b>54HC20</b>	<b>65003</b>	54LS09	31005
54F32	33501	<b>54HC27</b>	<b>65102</b>	<b>54LS10</b>	<b>30005</b>
54F64	33401	<b>54HC30</b>	<b>65004</b>	<b>54LS11</b>	<b>31001</b>
54F074	34101	<b>54HC32</b>	<b>65201</b>	<b>54LS12</b>	<b>30006</b>
54F086	34501	54HC73	65301	<b>54LS13</b>	<b>31301</b>
54F109	34102	<b>54HC74</b>	<b>65302</b>	<b>54LS14</b>	<b>31302</b>
54F112	34103	<b>54HC86</b>	<b>65202</b>	<b>54LS15</b>	<b>31002</b>
54F138	33701	54HC107	65303	<b>54LS20</b>	<b>30007</b>
54F139	33702	<b>54HC109</b>	<b>65304</b>	<b>54LS21</b>	<b>31003</b>
54F151	33901	<b>54HC112</b>	<b>65305</b>	<b>54LS22</b>	<b>30008</b>
54F153	33902	54HC132	65005	<b>54LS26</b>	<b>32102</b>
54F157	33903	<b>54HC174</b>	<b>65307</b>	<b>54LS27</b>	<b>30302</b>
54F158	33904	<b>54HC175</b>	<b>65308</b>	54LS28	30204
54F174	34107	54HC240	65703	<b>54LS30</b>	<b>30009</b>
54F175	34104	54HC241	65704	<b>54LS32</b>	<b>30501</b>
54F194	33601	54HC244	65705	<b>54LS37</b>	<b>30202</b>
54F240	33201	<b>54HC266</b>	<b>65103</b>	<b>54LS38</b>	<b>30203</b>
54F241	33202	<b>54HC273</b>	<b>65601</b>	<b>54LS40</b>	<b>30201</b>
54F242	34801	54HC365	65706	<b>54LS42</b>	<b>30703</b>
54F243	34802	54HC366	65707	<b>54LS47</b>	<b>30704</b>
54F244	34203	54HC367	65708	<b>54LS51</b>	<b>30401</b>
54F245	34803	54HC368	65709	<b>54LS54</b>	<b>30402</b>
54F251	33905	<b>54HC374</b>	<b>65602</b>	<b>54LS73A</b>	<b>30101</b>
54F253	33908	54HC377	65603	<b>54LS74A</b>	<b>30102</b>
54F257	33906	54HC534	65605	<b>54LS75</b>	<b>31601</b>
54F258	33907	<b>54HC540</b>	<b>65710</b>	<b>54LS76A</b>	<b>30110</b>
54F280	34901	<b>54HC541</b>	<b>65711</b>	<b>54LS83A</b>	<b>31201</b>
54F283	34201	54HC564	65606	<b>54LS85</b>	<b>31101</b>
54F352	33909	<b>54HC574</b>	<b>65604</b>	<b>54LS86</b>	<b>30502</b>
54F353	33910	<b>54HC4002</b>	<b>65104</b>	<b>54LS90</b>	<b>31501</b>
54F373	34601	54HC4049	65712	<b>54LS92</b>	<b>31510</b>
54F374	34105	54HC4050	65713	<b>54LS93</b>	<b>31502</b>
54F398	35001	54L00	02004	<b>65LS95B</b>	<b>30603</b>
54F399	35002	54L01	02006	<b>54LS96</b>	<b>30604</b>
54F521	34701	54L02	02701	<b>54LS107A</b>	<b>30108</b>
54F533	34602	54L03	02006	<b>54LS109A</b>	<b>30109</b>
54F534	34106	54L04	02005	54LS112	30103
54H00	02304	54L10	02003	<b>54LS113A</b>	<b>30104</b>
54H01	02306	54L20	02002	<b>54LS114A</b>	<b>30105</b>
54H04	02305	54L30	02001	<b>54LS122</b>	<b>31403</b>
54H08	15501	54L42	02901	<b>54LS123</b>	<b>31401</b>
54H08	15504	54L43	02902	<b>54LS125A</b>	<b>32301</b>
54H10	02303	54L44	02903	<b>54LS126A</b>	<b>32302</b>

**5 Military Products**

# GENERIC TYPE AND JAN DEVICE CROSS-REFERENCE GUIDE

## Generic Industry No. to Military Device Type M38510

Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/	Generic Industry No.	Military Device Type M38510/
54LS132	31303	54LS424	42201	55325B	13001
54LS138	30701	54LS428	42301	55326A	13002
54LS139	30702	54LS490	32703	55327A	13003
54LS148	36001	54LS540	32404	5532A	13102
54LS151	30901	54LS541	32405	5534A	13101
54LS153	30902	54LS646	32804	5537	12502
54LS155A	32601	54LS648	32805	55450	12901
54LS156	32602	54LS670	31901	55451B	12902
54LS157	30903	54S00	07001	55452B	12903
54LS158	30904	54S02	07301	55453B	12904
54LS160A	31503	54S03	07002	55454B	12905
54LS161A	31504	54S04	07003	55460	12906
54LS162A	31511	54S05	07004	55461	12907
54LS163A	31512	54S08	08003	55462	12908
54LS164	30605	54S09	08004	55463	12909
54LS165A	30608	54S10	07005	55464	12910
54LS166A	30609	54S11	08001		
54LS168	31505	54S15	08002		
54LS169A	31506	54S20	07006		
54LS170	31902	54S22	07007		
54LS173A	36101	54S30	07008		
54LS174	30106	54S40	07201		
54LS175	30107	54S51	07401		
54LS181	30801	54S64	07402		
54LS190	31513	54S65	07403		
54LS191	31509	54S74	07101		
54LS192	31507	54S85	08201		
54LS193	31508	54S86	07501		
54LS194A	30601	54S112	07102		
54LS195A	30602	54S113	07103		
54LS196	32001	54S114	07104		
54LS197	32002	54S133	07009		
54LS221	31402	54S134	07010		
54LS240	32401	54S135	07502		
54LS241	32402	54S138	07701		
54LS242	32801	54S139	07702		
54LS243	32802	54S140	08101		
54LS244	32403	54S151	07901		
54LS245	32803	54S153	07902		
54LS251	30905	54S157	07903		
54LS253	30908	54S158	07904		
54LS257B	30906	54S174	07105		
54LS258B	30907	54S175	07106		
54LS259B	31603	54S181	07801		
54LS259B	31605	54S182	07802		
54LS261	31801	54S194	07601		
54LS266	30303	54S195	07602		
54LS273	32501	54S251	07905		
54LS279	31602	54S253	07908		
54LS280	32901	54S257	07906		
54LS283	31202	54S258	07907		
54LS290	32003	54S287	20302		
54LS293	32004	54S288	20702		
54LS295B	30606	54S412	42101		
54LS298	30909	54S472	20805		
54LS348	36002	54S473	20804		
54LS365A	32201	54S474	20802		
54LS366A	32202	54S475	20801		
54LS367A	32203	54S570	20401		
54LS368A	32204	54S571	20402		
54LS373	32502	54S572	20601		
54LS374	32503	54S573	20603		
54LS375	31604	55107	10401		
54LS377	32504	55108	10402		
54LS390	32701	55113	10405		
54LS393	32702	55114	10403		
54LS395A	30607	55115	10404		

# DESC CROSS-REFERENCE GUIDE

## Generic Part Number to Desc Drawing Number

Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number
0056	7800801	27S45	8552701	46106B	8550101
10516	7800901	27S45A	8552702	506A	8513101
14584	8550102	27S47	8552703	507A	8513102
145xxB	See 45xxB	27S47A	8552704	508A	7705201
1526	8551501	27S49	8200901	508A (0-Vprot.)	7705202
1536	7800304	27S49A	8200902	509A	8513103
1545	8671201	2901A,B	7700701	5040	8100601,09
15530-8	7802901	2901C	8405701	5041	8100602,10
1823	7901801	2904	8601701	5042	8100603,11
1842	8670401	2909A	8602701	5043	8100604,12
1853	7901901	2910	7801701	5044	8100605,13
1854	7901701	2910A	7801702	5045	8100606,14
		291A	8602901	5046	8100607,15
		2911A	8602801	5047	8100608,16
201A	7705301	2917A	8671401	5341	7801601
2118	8101501	2918	8671501		
2420	8001601	29633	7902401	54ALS09	8414201
2516-45	7802201	29705A	8602501	54ALS21A	8414301
25LS09	8670801			54ALS74A	8401101
25LS299	7802402	3130	7703301	54ALS109A	8400001
25LS2518	8671901			54ALS112A	8400002
25LS2521	8671301	32010	8405301	54ALS151	8414101
25S241	8672501			54ALS153	8413401
2640	7800302	4013B	7901101	54ALS161B	8302201
27128 (450 ns)	8202501	40174B	8202201	54ALS162B	8407901
27128 (250 ns)	8202502	4021B	7901201	54ALS163B	8302202
2716 (350 ns)	7802202	4023B	7901301	54ALS169B	8302501
27256 (350 ns)	8411101	4029B	8101601	54ALS174	8301901
27256 (250 ns)	8411102	4035B	8101701	54ALS175	8301902
27256 (200 ns)	8411103	4040B	7705801	54ALS191	8684001
27256 (170 ns)	8411104	4042B	8101901	54ALS242B	8401301
2732	8001201	4044B	7702601	54ALS243A	8401302
2732A25	8001203	4047B	8102001	54ALS245A	8403001
2732A45	8001204	4049UB	7901401	54ALS251	8413501
27512-25	8513501	4052B	7901501	54ALS253	8509601
27512-30	8513503	4053B	8101801	54ALS257	8509701
27512-35	8513502	4060A	7703101	54ALS273	8413601
27512-45	8513504	4069B	7702701	54ALS299	8302101
2764 (450 ns)	8200501	4072B	7706001	54ALS323	8302102
2764 (250 ns)	8200502	4073B	7705101	54ALS373	8302001
2764A (350 ns)	8200503	4078B	7704401	54ALS374	8302002
2764A (250 ns)	8200504	4081B	7702401	54ALS561A	8302203
2764A (200 ns)	8200505	4082B	7705901	54ALS569A	8302502
27C64-20	8510203	4093B	7704601	54ALS573B	8401201
27C64-25	8510201	4094B	7702501	54ALS574A	8400101
27C64-35	8510202	4098B	7705501	54ALS576A	8400102
27LS00	8602001			54ALS580A	8401202
27LS00A	8602002	4164 (120 ns)	8201008	54ALS645A	8403301
27LS01	8602003	4164 (150 ns)	8201006	54ALS832	8414501
27LS01A	8602004	4164 (200ns)	8201007	54ALS873B	8403201
27LS02	8605103	4167 (100 ns)	8200701	54ALS874A	8401001
27LS03	8605107	4167 (70 ns)	8200702	54ALS876	8401002
27LS07	7801504	4167 (55 ns)	8200703	54ALS880	8403202
27PS191	8552601	4256-15	8515201	54ALS1000A	8405901
27PS191A	8552602	4256-20	8515202	54ALS1004	8406101
27PS291	8552603	4502B	7702001	54ALS1008A	8409701
27PS291A	8552604	4514B	7703501	54ALS1010A	8406001
27S02	8605101	4515B	7703201	54ALS1034	8403101
27S02A	8605102	4516	8101502		
27S03	8605104	4520B	7702301	54C08	7703601
27S03A	8605106	4528B	7704501	54C85	7703701
27S07	7801503	4555B	7704701	54C906	7705601
27S07A	7801501	4556B	7704801		
27S35	8670601	4557B	7901601	54F85	8606901
27S35A	8670602	4564 (150 ns)	8201001, 02	54F245	8551101
27S37	8670603	4564 (200 ns)	8201003	54F381	8671001
27S37A	8670604	4585	7703702		



Military Products

# DESC CROSS-REFERENCE GUIDE

## Generic Part Number to Desc Drawing Number

Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number
54HC00	8403701	54LS76	7601301	5539	8606401
54HC02	8404101	54LS83A	7601401	55182	7900801
54HC04	8409801	54LS90	7603201	55183	7900901
54HC05	8601301	54LS93	7700101	55452	7704901
54HC08	8404701	54LS122	7600301		
54HC10	8403801	54LS123	7603901	55500	8601801
54HC11	8404801	54LS124	7704101	55501	8601802
54HC14	8409101	54LS132	7600401		
54HC20	8403901	54LS138	7600501	574AU	8512701,03
54HC27	8404201	54LS139	7600701	574AT	8512702,04
54HC30	8404001	54LS145	8508401		
54HC32	8404501	54LS148	7802701	6N134	8102801
54HC73	8515301	54LS151	7601001	6N140A	8302401
54HC74	8405601	54LS153	7601101	6108	7705201
54HC75	8407001	54LS154	83017	6164-55	8552505
54HC86	8404601	54LS157	7600201	63105	8604901
54HC107	8515401	54LS158	7603301	6504	8102401
54HC109	8415001	54LS160	7700901	6514	8102402
54HC112	8408801	54LS161	7600801	6516-8	8403601
54HC138	8406201	54LS163	7603401	65162C	8403603
54HC139	8409201	54LS165	7700601	65162-8	8403602
54HC147	8406401	54LS166	8001701	68000 (6MHz)	8202101
54HC151	8412801	54LS168	8001801	68000 (8MHz)	8202102
54HC153	8409301	54LS169A	8001802	68000 (10MHz)	8202103
54HC161	8407501	54LS170	8002501	685	8600901
54HC162	8409401	54LS190	7603501	76321	8200801
54HC164	8416201	54LS191	7600901	7641	7801601
54HC165	8409501	54LS192	7603601	76641	8200901
54HC174	8407301	54LS193	7600601	7681	7902401
54HC175	8408901	54LS196	7701001	7820A	7900801
54HC240	8407401	54LS197	7601501	7831	8004101
54HC243	8409001	54LS221	7604201	7832	8004102
54HC244	8409601	54LS240	7801201	79M05	7704001
54HC245	8408501	54LS242	8002001	79M12	7704003
54HC251	8512501	54LS243	8002002	79M15	7704004
54HC257	8512401	54LS244	7705701	79M24	7704005
54HC259	8551901	54LS245	8002101	7905K	7704001
54HC266	8404301	54LS251	7601601	7912K	7704003
54HC273	8409901	54LS253	7601701	7915K	7704004
54HC365	8500101	54LS257	7603701	7924K	7704005
54HC367	8500201	54LS258	7603801		
54HC373	8407201	54LS261	8002601	8001	8000301
54HC374	8407101	54LS273	7801001	8001A	8000303
54HC390	8600901	54LS279	7601801	8002	8000302
54HC393	8410001	54LS283	7604301	8080A	7700201
54HC4002	8404401	54LS298	7601901	8085A	7901001
54HC4017	8601101	54LS299	7802401	80C86	8405201
54HC4020	8500301	54LS353	8550801	82288-6	8514901
54HC4024	8601201	54LS374	7801101	82288-8	8514902
54HC4040	8500401	54LS390	7802601	8282	8417901
54HC573	8512801	54LS399	8415401	8283	8417902
54HCT32	8685201	54LS540	8415501	8286	8686801
54HCT74	8685301	54LS541	8415601	8287	8686802
54HCT138	8550401	54LS629	8102101	82C54	8406501
54HCT154	8670101	54LS640	8416101	82C55A	8406601
54HCT240	8550501	54LS670	7704201	82C82	8406701
54HCT244	8513001	54LS682	8415101	82C84A	8406801
54HCT245	8550601	54LS684	8415201	82C88	8406901
54HCT374	8550701	54LS688	8415301	82C89	8552801
54HCU04	8601001			82S141	7801601
		54S138	7604101	82S16	8602301
54LS09	8001901	54S139	7700401	8397	8552001
54LS26	7602001	54S189	7801502	8536	8300101
54LS33	8512601	54S194	7604001	8X305	8550201
54LS42	7603101	54S251	8002201	8X320	8550301
54LS47	7604501	54S258	8002301	9064-15	8201009
54LS75	7601201			9064-20	8201010
		54185A	7703001		

**5**  
Military Products



# DESC CROSS-REFERENCE GUIDE

## Generic Part Number to Desc Drawing Number

Generic Part Number	Desc Drawing Number
9128-12	8103907
9128-20	8103908
9128-90	8103906
93448	7801601
93Z565	8200901
93Z565A	8200902
9513A	8552301
99C88-10	8552503
99C88-12	8552502
99C88-15	8552501
99C88-70	8552504
AD562	8100801
AD563	8100802
AM686	7801801
AM687	7801901
AM26LS31	7802301
AM26LS32	7802001
AM26LS33	7802002
AM2932	8605001
CA3130B	7703301
CT50002	7801801
DAC87 (HYB)	8300201
DAC87 (MONO)	8300301
DG129	7801401
DG201A	7705301
DG508A	7705201
HA-2640-8	7800302
H1508A	7705202
IH5116	8513104
IH5208	8513105
IH5216	8513106
IH6108	7705201
LH0002	7801301
LH0032	8001301
LH0033	8001401
LM103H-1.8	7702801
LM103H-2.0	7702802
LM103H-2.2	7702803
LM103H-2.4	7702804
LM103H-2.7	7702805
LM103H-3.0	7702806
LM103H-3.3	7702807
LM103H-3.6	7702808
LM103H-3.9	7702809
LM103H-4.3	7702810
LM103H-4.7	7702811
LM103H-5.1	7702812
LM103H-5.6	7702813
LM106	8003701
LM117	7703401
LM117HV	7703402
LM119	8601401
LM119A	8601402
LM120H-5.0	7704001
LM120H-12	7704003
LM120H-15	7704004
LM120H-24	7704005
LM120K-5.0	7704001
LM120K-12	7704003
LM120K-15	7704004
LM120K-24	7704005
LM124	7704301
LM137	7703403
LM137HV	7703404
LM139	7700801

Generic Part Number	Desc Drawing Number
LM143	7800303
LM144	7800301
LM4250	7703901
M80286-6	8514802
M80286-8	8514801
MC1536B	7800304
MKB4516	8101502
NSC800(2.5 MHz)	8301301
NSC800(4 MHz)	8301302
OP07	8203602
OP07A	8203601
PAL10H8	8103501
PAL10L8	8103506
PAL12H6	8103502
PAL12L6	8103507
PAL14H4	8103503
PAL14L4	8103508
PAL16A4	8103606
PAL16C1	8103505
PAL16H2	8103504
PAL16L2	8103509
PAL16L8	8103601
PAL16L8A	8103607
PAL16L8A-2	8103611
PAL16L8A-4	8506501
PAL16R4	8103604
PAL16R4A	8103610
PAL16R4A-2	8103614
PAL16R4A-4	8506504
PAL16R6	8103603
6R6A	8103609
PAL16R6A-2	8103613
PAL16R6A-4	8506503
PAL16R8	8103602
PAL16R8A	8103608
PAL16R8A-2	8103612
PAL16R8A-4	8506502
PAL16X4	8103605
PAL20L8A	8412901
PAL20L10A	8412905
PAL20R4A	8412904
PAL20X4A	8412906
PAL20R6A	8412903
PAL20X6A	8412907
PAL20R8A	8412902
PAL20X8A	8412908
PAL22V10A	8605301
REF02A	8551401
RM4194	7705401
SG1524	7802801
TIBPAL16L8-20	8515501
TIBPAL16L8-30	8515505
TIBPAL16R4-20	8515504
TIBPAL16R4-30	8515508
TIBPAL16R6-20	8515504
TIBPAL16R6-30	8515507
TIBPAL16R8-20	8515502
TIBPAL16R8-30	8515506
TL061	8102301

Generic Part Number	Desc Drawing Number
TL062	8102302
TL064	8102303
TL071	8102304
TL072	8102305
TL074	8102306
TL431	8410901
TP0032	8001301
TP0033	8001401
UHC0508	8550001
XR-2211	7705001
Z8001	8000301
Z8001A	8000303
Z8001B	8000304
Z8002	8000302
Z8002B	8000305
Z8030	8551802
Z8030A	8551801
Z8036	8551702
Z8036A	8551701
Z8430	8301602
Z8430A	8301601
Z8442	8301502
Z8442A	8301501
Z8536	8300101
Z8536A	8300102

**5** Military Products

## DESC CROSS-REFERENCE GUIDE

### Desc Drawing Number to Generic Part Number

Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number
7600201	54LS157	7703403	LM137	7801601	82S141
7600301	54LS122	7703404	LM137HV	7801601	5341
7600401	54LS132	7703501	4514B	7801601	7641
7600501	54LS138	7703601	54C08	7801601	93448
7600601	54LS193	7703701	54C85	7801701	2910
7600701	54LS139	7703702	4585	7801702	2910A
7600801	54LS161	7703901	LM4250	7801801	AM686
7600901	54LS191	7704001	7905K	7801901	AM687
7601001	54LS151	7704001	79M05	7802001	AM26LS32
7601101	54LS153	7704001	LM120H-5.0	7802002	AM26LS33
7601201	54LS75	7704001	LM120K-5.0	7802201	2516-45
7601301	54LS76	7704003	7912K	7802202	2716 (350 ns)
7601401	54LS83A	7704003	79M12	7802301	AM26LS31
7601501	54LS197	7704003	LM120H-12	7802401	54LS299
7601601	54LS251	7704003	LM120K-12	7802402	25LS299
7601701	54LS253	7704004	7915K	7802601	54LS390
7601801	54LS279	7704004	79M15	7802701	54LS148
7601901	54LS298	7704004	LM120H-15	7802801	SG1524
7602001	54LS26	7704004	LM120K-15	7802901	15530-8
7603101	54LS42	7704005	7924K	7900801	55182
7603201	54LS90	7704005	79M24	7900801	7820A
7603301	54LS158	7704005	LM120H-24	7900901	55183
7603401	54LS163	7704005	LM120K-24	7901001	8085A
7603501	54LS190	7704101	54LS124	7901101	4013B
7603601	54LS192	7704201	54LS670	7901201	4021B
7603701	54LS257	7704301	LM124	7901301	4023B
7603801	54LS258	7704401	4078B	7901401	4049UB
7603901	54LS123	7704501	4528B	7901501	4052B
7604001	54S194	7704601	4093B	7901601	4557B
7604101	54S138	7704701	4555B	7901701	1854
7604201	54LS221	7704801	4556B	7901801	1823
7604301	54LS283	7704901	55452	7901901	1853
7604501	54LS47	7705001	XR-2211	7902401	29633
7700101	54LS93	7705101	4073B	7902401	7681
7700201	8080A	7705201	508A	8000301	Z8001
7700401	54S139	7705201	DG508A	8000302	Z8002
7700601	54LS165	7705201	IH6108	8000303	Z8001
7700701	2901A, B	7705201	6108	8000304	Z8001B
7700801	LM139	7705202	508A (0-Vprot.)	8000305	Z8002B
7700901	54LS160	7705202	H1508A	8001201	2732
7701001	54LS196	7705301	201A	8001203	2732A25
7702001	4502B	7705301	DG201A	8001204	2732A45
7702301	4520B	7705401	RM4194	8001301	LH0032
7702401	4081B	7705501	4098B	8001301	TP0032
7702501	4094B	7705601	54C906	8001401	LH0033
7702601	4044B	7705701	54LS244	8001401	TP0033
7702701	4069B	7705801	4040B	8001601	2420
7702801	LM103H-1.8	7705901	4082B	8001701	54LS166
7702802	LM103H-2.0	7706001	4072B	8001801	54LS168
7702803	LM103H-2.2	7800301	LM144	8001802	54LS169A
7702804	LM103H-2.4	7800302	HA-2640-8	8001901	54LS09
7702805	LM103H-2.7	7800302	2640	8002001	54LS242
7702806	LM103H-3.0	7800303	LM143	8002002	54LS243
7702807	LM103H-3.3	7800304	MC1536B	8002101	54LS245
7702808	LM103H-3.6	7800304	1536	8002201	54S251
7702809	LM103H-3.9	7800801	0056	8002301	54S258
7702810	LM103H-4.3	7800901	10516	8002501	54LS170
7702811	LM103H-4.7	7801001	54LS273	8002601	54LS261
7702812	LM103H-5.1	7801101	54LS374	8003701	LM106
7702813	LM103H-5.6	7801201	54LS240	8004101	7831
7703001	54185A	7801301	CT50002	8004102	7832
7703101	4060A	7801301	LH0002	8100601	5040
7703201	4515B	7801401	DG129	8100602	5041
7703301	3130	7801501	27S07A	8100603	5042
7703301	CA3130B	7801502	54S189	8100604	5043
7703401	LM117	7801503	27S07	8100605	5044
7703402	LM117HV	7801504	27LS07	8100606	5045

# DESC CROSS-REFERENCE GUIDE

## Desc Drawing Number to Generic Part Number

Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number
8100607	5046	8200902	27S49A	8404001	54HC30
8100608	5047	8200902	93Z565A	8404101	54HC02
8100609	5040	8201001,02	4564 (150 ns)	8404201	54HC27
8100610	5041	8201003	4564 (200 ns)	8404301	54HC266
8100611	5042	8201006	4164 (150 ns)	8404401	54HC4002
8100612	5043	8201007	4164 (200 ns)	8404501	54HC32
8100613	5044	8201008	4164 (120 ns)	8404601	54HC86
8100614	5045	8201009	9064-15	8404701	54HC08
8100615	5046	8201010	9064-20	8404801	54HC11
8100616	5047	8202101	68000 (6 MHz)	8405201	80C86
8100801	AD562	8202102	68000 (8 MHz)	8405301	32010
8100802	AD563	8202103	68000 (10 MHz)	8405601	54HC74
8101501	2118	8202201	40174B	8405701	2901C
8101502	MKB4516	8202501	27128 (450 ns)	8405901	54ALS1000A
8101601	4029B	8202502	27128 (250 ns)	8406001	54ALS1010
8101701	4035B	8202503	27128A-20	8406101	54ALS1004
8101801	4053B	8202504	27128A-30	8406201	54HC138
8101901	4042B	8202505	27128A-25	8406401	54HC147
8102001	4047B	8202506	27128A-15	8406501	82C54
8102101	54LS629	8202507	27128A-11	8406601	82C55A
8102301	TL061	8203601	OP07A	8406701	82C82
8102302	TL062	8203602	OP07	8406801	82C84A
8102303	TL064	8300101	Z8536	8406901	82C88
8102304	TL071	8300102	Z8536A	8407001	54HC75
8102305	TL072	8300201	DAC87 (HYB)	8407101	54HC374
8102306	TL074	8300301	DAC87 (MONO)	8407201	54HC373
8102401	6504	8301301	NSC800 (2.5 MHz)	8407301	54HC174
8102402	6514	8301302	NSC800 (4 MHz)	8407401	54HC240
8102801	6N134	8301501	Z8442A	8407501	54HC161
8103501	PAL10H8	8301502	Z8442	8407901	54ALS162A
8103502	PAL12H6	8301601	Z8430A	8408501	54HC245
8103503	PAL14H4	8301602	Z8430	8408801	54HC112
8103504	PAL16H2	8301701	54LS154	8408901	54HC175
8103505	PAL16C1	8301901	54ALS174	8409001	54HC243
8103506	PAL10L8	8301902	54ALS175	8409101	54HC14
8103507	PAL12L6	8302001	54ALS373	8409201	54HC139
8103508	PAL14L4	8302002	54ALS374	8409301	54HC153
8103509	PAL16L2	8302101	54ALS299	8409401	54HC162
8103601	PAL16L8	8302102	54ALS323	8409501	54HC165
8103602	PAL16R8	8302201	54ALS161B	8409601	54HC244
8103603	PAL16R6	8302202	54ALS163B	8409701	54ALS1008A
8103604	PAL16R4	8302203	54ALS561A	8409801	54HC04
8103605	PAL16X4	8302401	6N140A	8409901	54HC273
8103606	PAL16A4	8302501	54ALS169B	8410001	54HC393
8103607	PAL16L8A	8302502	54ALS569A	8410901	TL431
8103608	PAL16R8A	8400001	54ALS109A	8411101	27256 (350 ns)
8103609	PAL16R6A	8400002	54ALS112A	8411102	27256 (250 ns)
8103610	PAL16R4A	8400101	54ALS574	8411103	27256 (200 ns)
8103611	PAL16L8A-2	8400102	54ALS576	8411104	27256-17
8103612	PAL16R8A-2	8401001	54ALS874	8412801	54HC151
8103613	PAL16R6A-2	8401002	54ALS876	8412901	PAL20L8A
8103614	PAL16R4A-2	8401101	54ALS74A	8412902	PAL20R8A
8103906	9128-90	8401201	54ALS573	8412903	PAL20R6A
8103907	9128-12	8401202	54ALS580	8412904	PAL20R4A
8103908	9128-20	8401301	54ALS242A	8412905	PAL20L10A
8200501	2764 (450 ns)	8401302	54ALS243A	8412906	PAL20X8A
8200502	2764 (250 ns)	8403001	54ALS245A	8412907	PAL20X10A
8200503	2764A (350 ns)	8403101	54ALS1034	8412908	PAL20X4A
8200504	2764A (250 ns)	8403201	54ALS873	8413201	65262
8200505	2764A (200 ns)	8403202	54ALS880	8413202	51C67
8200701	4167 (100 ns)	8403301	54ALS645A	8413401	54ALS153
8200702	4167 (70 ns)	8403601	6516-8	8413501	54ALS251
8200703	4167 (55 ns)	8403602	65162-8	8413601	54ALS273
8200801	76321	8403603	65162C	8414101	54ALS151
8200901	27S49	8403701	54HC00	8414201	54ALS09
8200901	93Z565	8403801	54HC10	8414301	54ALS21A
8200901	76641	8403901	54HC20	8414501	54ALS832

**MP** Military Products

# DESC CROSS-REFERENCE GUIDE

## Desc Drawing Number to Generic Part Number

Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number	Desc Drawing Number	Generic Part Number
8415001	54HC109	8515202	4256-20	8605101	27S02
8415101	54LS682	8515301	54HC73	8605102	27S02A
8415201	54LS684	8515401	54HC107	8605103	27LS0A
8415301	54LS688	8515501	TIBPAL16L8-20	8605104	27S03
8415401	54LS399	8515502	TIBPAL16R8-20	8605106	27S03A
8415501	54LS540	8515503	TIBPAL16R6-20	8605107	27LS03
8415601	54LS541	8515504	TIBPAL16R4-20	8605201	8X350
8416101	54LS640	8515505	TIBPAL16L8-30	8605301	PAL22V10A
8416201	54HC164	8515506	TIBPAL16R8-30	8605801	2803
8417901	8282	8515507	TIBPAL16R6-30	8606101	54HC157
8417902	8283	8515508	TIBPAL16R4-30	8606201	54HC563
8418001	LM136A	8550001	UHC0508	8606401	5539
8418501	733	8550101	46106B	8606901	54F85
8418601	Z8420A	8550102	14584	8607601	54HC163
8418602	Z8420	8550201	8X305	8607701	54HC280
8419001	8751H-8	8550301	8X320	8608101	2168-55
8500101	54HC365	8550401	54HCT138	8608102	2168-70
8500201	54HC367	8550501	54HCT240	8608103	2169-50
8500301	54HC4020	8550601	54HCT245	8608104	2169-70
8500401	54HC4040	8550701	54HCT374	8670101	54HCT154
8501001	M80186 (8 MHz)	8550801	54LS353	8670201	2919
8501002	M80186 (6 MHz)	8551101	54F245	8670201	25LS2519
8501501	82C52	8551401	REF02A	8670301	27S19
8503001	2700	8551501	1526	8670302	27S19A
8503002	2700	8551701	Z8036A	8670401	1842
8503003	2702	8551702	Z8036	8670601	27S35
8503004	2702	8551801	Z8030A	8670602	27S35A
8506301	8097	8551802	Z8030	8670603	27S37
8506401	80C31	8551901	54HC259	8670604	27S37A
8506402	80C51	8552001	8397	8670701	2965
8506501	PAL16L8A-4	8552301	9513A	8670702	2966
8506502	PAL16R8A-4	8552501	99C88-15	8670801	25LS09
8506503	PAL16R6A-4	8552502	99C88-12	8670901	82S105
8506504	PAL16R4A-4	8552503	99C88-10	8671001	54F381
8508401	54LS145	8552504	99C88-70	8671101	LM113
8508701	LH0041	8552505	6164-55	8671102	LM113-1
8508801	LH0021	8552601	27PS191	8671103	LM113-2
8508901	LH0101A	8552602	27PS191A	8671201	1545
8508902	LH0101	8552603	27PS291	8671301	25LS2521
8509601	54ALS253	8552604	27PS291A	8671401	2917A
8509701	54ALS257	8552701	27S45	8671501	2918
8510201	27C64-25	8552702	27S45A	8671901	25LS2518
8510202	27C64-35	8552703	27S47	8672501	25S241
8510203	27C64-20	8552704	27S47A	8680101	2942
8512401	54HC257	8552801	82C89	8681201	54HC368
8512501	54HC251	8600801	685	8681301	54HC533
8512601	54LS33	8600901	54HC390	8681401	54HC534
8512701	574AU	8601001	54HCJ04	8681501	54HC564
8512702	574AT	8601101	54HC4017	8681601	54HC595
8512703	574AU	8601201	54HC4024	8681701	54HC597
8512704	574AT	8601301	54HC05	8681801	54HC688
8512801	54HC573	8601401	LM119	8681901	54HC4049
8513001	54HCT244	8601402	LM119A	8682001	54HC4050
8513101	506A	8601701	2904	8682101	54HC42
8513102	507A	8601801	55500	8682201	54HC154
8513103	509A	8601802	55501	8682301	54HC158
8513104	IH5116	8602001	27LS00	8682401	54HC160
8513105	IH5216	8602002	27LS00A	8682501	54HC173
8513106	IH5208	8602003	27LS01	8682601	54HC194
8513501	27512-25	8602004	27LS01A	8682701	54HC195
8513502	27512-35	8602301	82S16	8682801	54HC366
8513503	27512-30	8602501	29705A	8684001	54ALS191
8513504	27512-45	8602701	2909A	8685201	54HCT32
8514801	M80286-8	8602801	2911A	8685301	54HCT74
8514802	M80286-6	8602901	291A	8686801	8286
8514901	82288-6	8603001	2940	8686802	8287
8514902	82288-8	8604901	63105		
8515201	4256-15	8605001	AM2932		

5

Military Products



---

# INTERFACE CIRCUITS

TI offers a broad line of linear interface products for applications involving an interface between logic circuitry and the real world. This includes microprocessor-compatible circuits that can amplify, convert analog signals, transmit and receive digital signals or drive actuators or displays.

TI's linear interface circuits represent technologies from classic bipolar through BIFET and BIFET, to LinCMOS™ and Advanced LinCMOS™ processes. LinCMOS and Advanced LinCMOS feature a step-function improvement in impedance, power dissipation and threshold stability.

Also available are surface mount packages including plastic and ceramic chip carriers and small outline (SO) packages. These increase board density with little impact on power handling capability.

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
Line Circuits .....	6-2
Line Drivers .....	6-2
Line Receivers .....	6-3
Line Transceivers .....	6-5
Display Drivers .....	6-6
Electroluminescent Display Drivers .....	6-6
LED Display Drivers .....	6-7
Vacuum Fluorescent Display Drivers .....	6-7
Plasma and Gas Discharge Display Drivers .....	6-8
AC Plasma Display Drivers .....	6-8
Peripheral Drivers .....	6-9
General Purpose Drivers and Actuators .....	6-9
Motor Drivers and Power Actuators .....	6-10
Memory Interface .....	6-11
MOS-Memory Sense Amplifiers .....	6-11
Ordering Instructions .....	6-12

# LINE CIRCUITS

## Line Drivers

APPLICATION	OUTPUT	DRIVERS PER PACKAGE	TYPE	PACKAGES	DOCUMENT
EIA Standard RS-422-A	Differential	2	SN75158	D,J,G,P	SLYD002
			SN75159	D,J,N	
			μA9638	D,J,G,P	
		4	AM26LS31	D,FK,J,N	SLYD002
			MC3487	D,J,N	
			SN75151	DW,J,N	
			SN75153	J,N	
			SN75172	J,N	
			SN75174	J,N	
SN75ALS192	D,J,N				
SN75ALS194	D,J,N				
EIA Standard RS-485	Differential	4	SN75172	J,N	SLYD002
			SN75174		
EIA Standard RS-423-A	Single-Ended	2	μ9636A	D,J,G,P	SLYD002
EIA Standard RS-232-C	Single-Ended	2	SN75150	D,J,G,P	SLYD002
			μ9636A		
		4	SN75188	D,J,N	SLYD002
IBM 360/370	Single-Ended	2	SN75123	D,J,N	SLYD002
		4	SN75ALS126	D,N	SLYD002
			SN75ALS130		
General Purpose	Single-Ended	2	SN75121	D,J,N	SLYD002
			SN75ALS121	D,N	SLLS030
	Differential	2	SN75109A	D,J,N	SLYD002
			SN75110A		
			SN75112		
			SN75113		
			SN75114		
	SN75183				
	4	MC3453	D,J,N	SLYD002	
SN75111					

# Line Receivers

APPLICATION	OUTPUT	RECEIVERS PER PACKAGE	TYPE	PACKAGES	DOCUMENT
EIA Standard RS-422-A	Differential	2	SN75146	D,J,G,P	SLYD002
			SN75157		
			$\mu$ 9637A		
			$\mu$ 9639		
		4	AM26LS32A	D,FK,J,N	SLYD002
			MC3486	D,J,N	
			SN75173	D,J,N	
			SN75175	D,J,N	
			SN75ALS193	J	
			SN75ALS195	J	
EIA Standard RS-485	Differential	4	SN75173	D,J,N	SLYD002
			SN75175		
EIA Standard RS-423-A	Single-Ended	2	SN75146	D,J,G,P	SLYD002
			SN75157		
			$\mu$ 9637A		
			$\mu$ 9639		
		4	AM26LS32A	D,FK,J,N	SLYD002
			MC3486	D,J,N	
			SN75173	D,J,N	
			SN75175	D,J,N	
			SN75ALS193	J	
			SN75ALS195	J	
EIA Standard RS-232-C	Single-Ended	2	SN75152	D,J,N	SLYD002
		4	SN75154	D,J,N	SLYD002
			SN75189		
			SN75189A		
IBM 360/370	Single-Ended	2	SN75ALS123	D,N	SLLS031
		3	SN75124	D,J,N	SLYD002
		7	SN75125	D,J,N	SLYD002
			SN75127	D,J,N	
			SN75ALS127	D,N	
		8	SN75128	DW,J,N	SLYD002
			SN75129		
General Purpose	Single-Ended	2	SN75122	D,J,N	SLYD002
			SN75140	D,J,G,P	
			SN75141	D,J,G,P	



## Line Receivers (Continued)

APPLICATION	OUTPUT	RECEIVERS PER PACKAGE	TYPE	PACKAGES	DOCUMENT
General Purpose	Differential	2	SN75107A	D,J,N	SLYD002
			SN75107B		
			SN75108A		
			SN75108B		
			SN75115		
			SN75182		
			SN75207		
			SN75207B		
			SN75208		
			SN75208B		
		4	AM26LS33A	D,FK,J,N	SLYD002
			MC3450	D,J,N	
			MC3452	D,J,N	

## Line Transceivers

APPLICATION	OUTPUT	DRIVERS PER PACKAGE	TYPE	PACKAGES	DOCUMENT
EIA Standard RS-232-C	Single-Ended	1	SN75155	D,J,G,P	SLYD002
EIA Standard RS-422-A and EIA Standard RS-485	Differential	1	SN65176B	D,J,G,P	SLYD002
			SN75176B		
			SN75177B		
			SN75178B		
			SN75179B		
EIA Standard 488 GPIB	Single-Ended	4	MC3446	D,J,N	SLYD002
		8	SN75160B	DW,J,N	SLYD002
			SN75ALS160	DW,J,N	
			SN75161B	DW,J,N	
			SN75ALS161	DW,J,N	
			SN75162B	DW,N	
			SN75ALS162	DW,N	
			SN75164B	DW,N	
			SN75ALS164	DW,N	
			SN75ALS165	DW,N	
IEEE 802.3 1BASE5	Differential	1	SN75061	DW,N	SLYD002
			SN75062		
General Purpose	Single-Ended	4	AM26S10C	D,J,N	SLYD002
			AM26S11C		
			SN75136		
			SN75138		
	8	SN75163B	DW,J,N	SLYD002	
		SN75ALS163	DW,N		
		Differential	1		SN75116
SN75117	D,J,G,P				
SN75118	D,J,N				
SN75119	D,J,G,P				
IEEE 896.1	Single-Ended	8	SN75ALS056	DW,N	SLLS028A
		4	SN75ALS057	DW,N	SLLS028A

# DISPLAY DRIVERS

## Electroluminescent Display Drivers

DESCRIPTION	PRODUCT FEATURES	DRIVERS PER PKG.	INPUT COMPATIBILITY	POWER SUPPLY	TYPE	PACKAGES	DOCUMENT	
Row Drivers	<ul style="list-style-type: none"> <li>• 225-V open-drain DMOS outputs</li> <li>• Serial-in, parallel-out architecture</li> <li>• 50-mA current sink output capability</li> <li>• Extremely low steady state power consumption</li> <li>• Left side (SNXX551) and right side (SNXX552) drivers enhance circuit layout</li> </ul>	32	CMOS	$V_{CC1}$ (logic) = 10.8 V to 15 V	SN65551	FN,N	SLYD002	
					SN65552			
					SN75551			
					SN75552			
	<ul style="list-style-type: none"> <li>• Monolithic BIFET integrated circuits</li> <li>• Very low steady-state power consumption</li> <li>• 300-mA output capability</li> <li>• High-voltage open-collector N-P-N outputs</li> </ul>	32	CMOS	$V_{CC1}$ (logic) = 10.8 V to 15 V	SN75557	FN	SLYD002	
					SN75558			
	<ul style="list-style-type: none"> <li>• 225-V totem-pole BIFET output structures</li> <li>• 70-mA output source/sink capability</li> <li>• Very low steady-state power consumption</li> <li>• 3-state capabilities</li> <li>• Selectable open-source or open-drain output</li> </ul>	34	CMOS	$V_{CC1}$ (logic) = 10.8 V to 15 V	SN65563	FN	SLYD002	
					SN65564			
					SN75563			
					SN75564			
	Column Drivers	<ul style="list-style-type: none"> <li>• 60-V totem-pole BIFET output structures</li> <li>• Serial-in, parallel-out architecture</li> <li>• 15-mA sink or source output capability</li> <li>• Top (SNXX553) and bottom (SNXX554) drivers enhance circuit layout</li> </ul>	32	CMOS	$V_{CC1}$ (logic) = 10.8 V to 15 V	SN65553	FN,N	SLYD002
						SN65554		
SN75553								
SN75554								
<ul style="list-style-type: none"> <li>• 90-V output voltage swing capability</li> <li>• 15-mA output source and sink current capability</li> <li>• High-speed serially-shifted data input</li> <li>• Totem-pole outputs</li> <li>• Latches on all driver outputs</li> </ul>		32	CMOS	$V_{CC1}$ (logic) = 10.8 V to 15 V to 15 V	SN65555	FN,N	SLYD002	
					SN65556			
					SN75555			
					SN75556			
<ul style="list-style-type: none"> <li>• Energy recovery system compatible</li> <li>• 4.5-V to 5.5-V <math>V_{CC1}</math> operation at 5 MHz</li> <li>• Two parallel high-speed 16-bit shift registers</li> <li>• 60-V totem-pole BIFET output structures</li> <li>• 15-mA sink or source output capability</li> <li>• Top (SNXX567) and bottom (SNXX568) drivers enhance circuit layout</li> </ul>		32	CMOS	$V_{CC1}$ (logic) = 4.5 V to 5.5 V	SN65567	FN	SLYD002	
					SN65568			
					SN75567			
					SN75568			

## LED Display Drivers

DESCRIPTION	PRODUCT FEATURES	DRIVERS PER PKG.	INPUT COMPATIBILITY	POWER SUPPLY	TYPE	PACKAGES	DOCUMENT
Digit Drivers	<ul style="list-style-type: none"> <li>250-mA sink capability</li> <li>Display blanking provisions</li> </ul>	6	MOS	Variable from 3.2 V to 8.8 V	SN75494	N	SLYD002

## Vacuum Fluorescent Display Drivers

DESCRIPTION	PRODUCT FEATURES	DRIVERS PER PKG.	INPUT COMPATIBILITY	POWER SUPPLY	TYPE	PACKAGES	DOCUMENT
Anode Grid Drivers Segment or Dot Matrix Formats	<ul style="list-style-type: none"> <li>Serial-in, parallel-out architecture</li> <li>60-V totem-pole outputs</li> <li>25-mA current source output capability</li> <li>On-board latches</li> </ul>	12	TTL	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	SN65512B SN75512B	DW,N	SLYD002
	<ul style="list-style-type: none"> <li>All features same as SN65512B except Shift register reset replaces latches</li> </ul>	12	TTL	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	SN65513B SN75513B	DW,N	SLYD002
	<ul style="list-style-type: none"> <li>All features same as SN65512B except 125-V totem-pole output</li> </ul>	12	CMOS	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}, V_{CC3}$ (display) = 0 V to 130 V	SN75514	DW,N	SLYD002
	<ul style="list-style-type: none"> <li>All features same as SN65512B except 32 bits for large format displays</li> </ul>	32	CMOS, TTL	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	SN65518 SN75518	FN,N	SLYD002
	<ul style="list-style-type: none"> <li>Serial-in, parallel-out architecture</li> <li>60-V totem-pole outputs</li> <li>40-mA current source output capability</li> <li>Second source to Sprague UCN-4810A</li> </ul>	10	CMOS,TTL	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	UCN4810A	N	SLYD002
	<ul style="list-style-type: none"> <li>Serial-in, parallel-out architecture</li> <li>60-V totem-pole outputs</li> <li>40-mA current source output capability</li> <li>Improved direct replacement for UCN4810A and TL4810A</li> </ul>	10	CMOS	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	TL4810B TL4810BI	DW,N	SLYD002
	<ul style="list-style-type: none"> <li>70-V output voltage swing capability</li> <li>Drives up to 20 lines</li> </ul>	20	CMOS	$V_{CC1}$ (logic) = 5 V to 15 V, $V_{CC2}$ (display) = 0 V to 60 V	TL5812	FN,N	SLYD002

## Plasma and Gas Discharge Display Drivers

DESCRIPTION	PRODUCT FEATURES	DRIVERS PER PKG.	INPUT COMPATIBILITY	POWER SUPPLY	TYPE	PACKAGES	DOCUMENT
Scan Line Drivers	<ul style="list-style-type: none"> <li>180-V open drain parallel outputs</li> <li>220-mA parallel output sink current</li> <li>Left side (SN751506) and right side (SN751516) drivers enhance circuit layout</li> </ul>	32	CMOS	$V_{CC}$ (logic) = 4 V to 6 V	SN751506	FT	SLYD002
					SN751516		
Data Line Drivers	<ul style="list-style-type: none"> <li>120-V open collector P-N-P parallel outputs</li> <li>Two parallel high-speed 16-bit shift registers</li> <li>Latches on all driver outputs</li> <li>Top (SN751508) and bottom (SN751518) drivers enhance circuit layout</li> </ul>	32	CMOS	$V_{CC}$ (logic) = 4.5 V to 5.5 V	SN751508	FT	SLYD002
					SN751518		
Anode Drivers	<ul style="list-style-type: none"> <li>Serial-in, parallel-out architecture</li> <li>150-V output capability</li> <li>Alternative driver for VF</li> </ul>	7	TTL	$V_{CC+}$ = 4.5 V to 5.5 V, $V_{CC}$ = -10.8 V to $\pm 13.2$ V	SN75581	J,N	SLYD002

## AC Plasma Display Drivers

DESCRIPTION	PRODUCT FEATURES	DRIVERS PER PKG.	INPUT COMPATIBILITY	POWER SUPPLY	TYPE	PACKAGES	DOCUMENT
Axis Drivers	<ul style="list-style-type: none"> <li>High-speed serial-in, parallel-out architecture (8 MHz)</li> <li>Fast output transitions (150 ns typ)</li> <li>15-mA output current capability</li> <li>X-axis driver (SNXX500)</li> <li>Y-axis driver (SNXX501)</li> </ul>	32 (8 bits with 1 of 4 selectors)	CMOS	$V_{CC1}$ (logic) = 10.8 V to 13.2 V, $V_{CC2}$ (display) = 0 V to 100 V	SN65500E	FN,N	SLYD002
					SN75500E		
					SN65501E		
	<ul style="list-style-type: none"> <li>High-speed serial-in, parallel-out</li> <li>X-axis driver (SN75509)</li> <li>Y-axis driver (SN75508)</li> </ul>	32 32 × 1	CMOS	$V_{CC1}$ (logic) = 7.65 V to 9.35 V, $V_{CC2}$ (display) = $V_{CC1}$ to 90 V	SN75508	FN	SLYD002
		32 (8 bits plus 2 select bits)	CMOS	$V_{CC1}$ (logic) = 8 V to 11.4 V, $V_{CC2}$ (display) = $V_{CC1}$ to 90 V	SN75509	FN	SLYD002

## PERIPHERAL DRIVERS

### General Purpose Drivers and Actuators

FUNCTION	INPUT CAPABILITY	SWITCHING VOLTAGE MAX (V)	OFF-STATE VOLTAGE MAX (V)	OUTPUT CURRENT (mA)	DRIVERS PER PACKAGE	OUTPUT CLAMP DIODES	DELAY TIME TYP (ns)	TYPE	PACKAGES	DOCUMENT
AND	TTL	20	30	300	2	No	18	SN75451B	D,P	SLYD002
NAND	TTL	20	30	300	2	No	25	SN75452B	D,P	SLYD002
OR	TTL	20	30	300	2	No	18	SN75453B	D,P	SLYD002
NOR	TTL	20	30	300	2	No	26	SN75454B	D,P	SLYD002
MOS Driver	TTL	24	24	500	2	Yes	35	SN75372	D,P	SLYD002
MOS Driver	TTL	24	24	500	4	Yes	35	SN75374	D,N	SLYD002
AND	TTL	30	35	300	2	No	28	SN75461	D,P	SLYD002
NAND	TTL	30	35	300	2	No	38	SN75462	D,P	SLYD002
OR	TTL	30	35	300	2	No	28	SN75463	D,P	SLYD002
Invert w/Enable	TTL,CMOS	35	70	500	4	Yes	1050	SN75437A	NE	SLYD002
Invert w/Enable	TTL,CMOS	35	70	600	4	Yes	750	SN75435	NE	SLYD002
Buffer w/Enable	CMOS, MOS, TTL	35	70	600	4	Yes	1450	SN75440	NE	SLYD002
Invert w/Enable	TTL,CMOS	35	70	1000	4	Yes	1050	SN75438	NE	SLYD002
Invert	TTL	35	50	1250	4	Yes	500	SN75064	NE	SLYD002
Invert	MOS	35	50	1250	4	Yes	500	SN75066	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	35	50	1250	4	Yes	500	SN75068	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	35	50	1500	4	No	500	UDN2841	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	35	50	1500	4	No	500	UDN2845	NE	SLYD002
Invert	TTL	35	50	1250	4	Yes	500	ULN2064	NE	SLYD002
Invert	MOS	35	50	1250	4	Yes	500	ULN2066	NE	SLYD002
Invert	TTL,CMOS	35	50	1250	4	Yes	500	ULN2068	NE	SLYD002
Invert	TTL,CMOS	35	50	1250	4	No	500	ULN2074	NE	SLYD002
AND	TTL,CMOS	55	70	350	2	Yes	300	SN75446	D,P	SLYD002
NAND	TTL,CMOS	55	70	350	2	Yes	300	SN75447	D,P	SLYD002
OR	TTL,CMOS	55	70	350	2	Yes	300	SN75448	D,P	SLYD002
NOR	TTL,CMOS	55	70	350	2	Yes	300	SN75449	D,P	SLYD002
NAND	TTL,CMOS	50	70	500	2	Yes	500	SN75407	D,P	SLYD002
OR	TTL,CMOS	50	70	500	2	Yes	500	SN75408	D,P	SLYD002
Invert w/Enable	TTL,CMOS	50	70	500	4	Yes	1050	SN75436	NE	SLYD002
Invert	TTL,CMOS, PMOS	50	50	350	7	Yes	250	ULN2001A	D,N	SLYD002
Invert	25 V PMOS	50	50	350	7	Yes	250	ULN2002A	D,N	SLYD002
invert	TTL,CMOS	50	50	350	7	Yes	250	ULN2003A	D,N	SLYD002
Invert	15 V MOS	50	50	350	7	Yes	250	ULN2004A	D,N	SLYD002
Invert	TTL	50	50	350	7	Yes	250	ULN2005A	D,N	SLYD002
Invert	TTL	50	80	1500	4	Yes	500	SN75065	NE	SLYD002
Invert	MOS	50	80	1500	4	Yes	500	SN75067	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	50	80	1500	4	Yes	500	SN75069	NE	SLYD002
Invert	TTL	50	80	1500	4	Yes	500	ULN2065	NE	SLYD002
Invert	TTL	50	80	1500	4	Yes	500	ULN2067	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	50	80	1500	4	Yes	500	ULN2069	NE	SLYD002
Invert	TTL,5 V									
Invert	MOS	50	80	1500	4	No	500	ULN2075	NE	SLYD002

## General Purpose Drivers and Actuators (Continued)

FUNCTION	INPUT CAPABILITY	SWITCHING VOLTAGE MAX (V)	OFF-STATE VOLTAGE MAX (V)	OUTPUT CURRENT (mA)	DRIVERS PER PACKAGE	OUTPUT CLAMP DIODES	DELAY TIME TYP (ns)	TYPE	PACKAGES	DOCUMENT
AND	TTL	55	70	300	2	No	28	SN75471	D,P	SLYD002
NAND	TTL	55	70	300	2	No	38	SN75472	D,P	SLYD002
OR	TTL	55	70	300	2	No	28	SN75473	D,P	SLYD002
AND	TTL,CMOS	55	70	300	2	Yes	200	SN75476	D,P	SLYD002
NAND	TTL,CMOS	55	70	300	2	Yes	200	SN75477	D,P	SLYD002
OR	TTL,CMOS	55	70	300	2	Yes	200	SN75478	D,P	SLYD002
NOR	TTL,CMOS	55	70	300	2	Yes	200	SN75479	D,P	SLYD002
Telecom Ry Drv	TTL,CMOS, MOS	60	60	100	4	Yes	1000	DS3680	D,J,N	SLYD002
Invert	TTL	60	100	350	7	Yes	250	SN75465	D,N	SLYD002
Invert	TTL,CMOS, PMOS	60	100	350	7	Yes	250	SN75466	D,N	SLYD002
Invert	25 V PMOS	60	100	350	7	Yes	250	SN75467	D,N	SLYD002
Invert	TTL,CMOS	60	100	350	7	Yes	250	SN75468	D,N	SLYD002
Invert	15 V MOS	60	100	350	7	Yes	250	SN75469	D,N	SLYD002

## Motor Drivers and Power Actuators

FUNCTION	INPUT CAPABILITY	SWITCHING VOLTAGE MAX (V)	OFF-STATE VOLTAGE MAX (V)	OUTPUT CURRENT (mA)	DRIVERS PER PACKAGE	OUTPUT CLAMP DIODES	TYPE	PACKAGES	DOCUMENT
Half-H Driver	TTL,MOS, CMOS	18	18	500	3	No	TL376C	NE	SLYD002
Half-H Driver	TTL	36	36	600	4	Yes	L293D	NE	SLYD002
Half-H Driver	TTL	36	36	1000	4	No	L293	NE	SLYD002
Half-H Driver	TTL,CMOS	36	36	1000	4	Yes	SN754410	NE	SLYD002
Half-H Driver	TTL,CMOS	36	36	1000	4	No	SN754411	NE	SLYD002
Half-H Driver	TTL,CMOS	40	40	2000	1	Yes	SN75603	KC,KH,KV	SLYD002
Half-H Driver	TTL,CMOS	40	40	2000	1	Yes	SN75604	KC,KH,KV	SLYD002
Half-H Driver	TTL,CMOS	40	40	2000	1	Yes	SN75605	KC,KH,KV	SLYD002
Stepper Driver	TTL	46	46	1000	1	Yes	PBL3717A	NE	SLYD002
Full-H Driver	TTL	46	46	2000	2	No	L298	KV	SLRS011
Actuator	TTL,CMOS	60	60	2500	2	Yes	SN75608	KV	SLYD002
Actuator	TTL,CMOS	60	60	2500	2	Yes	SN75609	KV	SLYD002

---

## MEMORY INTERFACE

### MOS-Memory Sense Amplifiers

OUTPUT TYPE	UNITS PER PACKAGE	THRESHOLD SENSITIVITY (mV)	<sup>1</sup> PD* TYP (ns)	DEVICE TYPE	PACKAGES	DOCUMENT
Totem Pole	2	± 25	17	SN75107A	D,J,N	SLYD002
Totem Pole	2	± 25	17	SN75107B	D,J,N	SLYD002
Open Collector	2	± 25	19	SN75108A	D,J,N	SLYD002
Open Collector	2	± 25	19	SN75108B	D,J,N	SLYD002
Totem Pole	2	± 10	25	SN75207	D,J,N	SLYD002
Open Collector	2	± 10	25	SN75208	D,J,N	SLYD002

\* <sup>1</sup>PD Propagation Delay Time



Factory orders for circuits described in this guide should include a four-part type number as explained in the following example.

EXAMPLE: TL 062M JG /883B

1. **Prefix**

MUST CONTAIN TWO OR THREE LETTERS

- TL ..... TI Linear Products (excluding Interface)
- TLC ..... TI Linear Silicon-Gate CMOS Products
- SN ..... TI Special Function or Interface Products
- TCM ..... TI Telecommunication Products
- TSP ..... Speech Products
- TISP ..... Transient Suppressors

STANDARD SECOND-SOURCE PREFIXES

- ADC ..... Analog Devices OP ..... PMI
- LM ..... National RC, RM or RV ..... Raytheon
- MC ..... Motorola SG ..... Silicon General
- NE, SA, or SE ..... Signetics uA ..... Fairchild
- AM ..... ADM UDN ..... Sprague
- DS ..... National ULN ..... Sprague

2. **Unique Circuit Designator Including Temperature Range (If not already specified by the prefix)**

MUST CONTAIN THREE TO SEVEN CHARACTERS  
(From Individual Data Sheets)

- Examples: 062M 28867  
5941 78L05AC  
532AI

3. **Package**

MUST CONTAIN ONE OR TWO LETTERS

- D, DW, FK, FN, J, JD, JG, KC, KH, KV, LP, LU, N, P, U, W
- (From Pin-Connection Diagram on Individual Date Sheet)

4. **MIL-STD-883B, Method 5004, Class B**

OMIT/883B WHEN NOT APPLICABLE

Circuits are shipped in one of the carriers below. Unless a specific method of shipment is specified by the customer (with possible additional costs), circuits will be shipped on the most practical carrier.

Dual-In-Line (D, DW, J, JD, JG, N, P)

- Slide Magazines
- A-Channel Plastic Tubing
- Barnes Carrier
- Sectioned Cardboard Box
- Individual Cardboard Box

Plug-In (LP, LU)

- Barnes Carrier
- Sectional Cardboard Box
- Individual Cardboard Box

Flat (U, W)

- Barnes Carrier
- Milton Ross Carrier

Chip Carriers (FK, FN)

- Anti-Static Plastic Tubing

Power Tab (KC, KH, KV)

- Sleeves

---

# LINEAR CIRCUITS

The rapid advance in high-tech digital processing creates new demands for microprocessor-compatible circuits that can sense or amplify analog signals or provide regulated power to a system. This section presents information on TI's broad line of integrated circuits designed for applications involving analog signal conditioning.

These circuits span the recent rapid development of integrated circuit technology from classical bipolar through BIFET and BIDFET to TI's LinCMOS™ processing that provides a step function improvement in input impedance, power dissipation and threshold stability. Surface mount packages include plastic and ceramic chip carriers and small-outline packages that increase board density with little impact on power handling capability.

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
Linear Signal Conditioning Circuits .....	7-2
Operational Amplifiers .....	7-2
Noncompensated, Single .....	7-2
Internally Compensated, Single .....	7-3
Internally Compensated, Dual .....	7-5
Internally Compensated, Quad .....	7-8
Differential Video Amplifiers, Magnetic-Media Read and Write Circuits .....	7-10
Voltage Comparators .....	7-11
Internally Compensated, Single .....	7-11
Data Acquisition and Conversion Circuits .....	7-13
Single-and Dual-Slope A/D Converters .....	7-13
Successive-Approximation and Semi-Flash A/D Converters, D/A Converters .....	7-14
Analog Interface for Digital Signal Processors, Analog Switches and Multiplexers .....	7-15
Switched-Capacitor Filter ICs .....	7-15
Power Supply Circuits .....	7-16
Power Supply Supervisors .....	7-16
Voltage Regulators .....	7-16
Shunt Voltage Regulators/References, Adjustable Series Pass Voltage Regulators .....	7-16
Positive Voltage Regulators .....	7-17
Negative Voltage Regulators .....	7-18
Switched-Capacitor Voltage ICs .....	7-18
PWM Controllers .....	7-19
Special Functions .....	7-20
Timers .....	7-20
Current Mirrors, Hall-Effect Products, Frequency-to-Voltage Converters .....	7-21
Sonar Ranging Functions, Programmable Tone/Noise Generators .....	7-22
Ordering Instructions .....	7-23

# LINEAR SIGNAL CONDITIONING CIRCUITS

## Operational Amplifiers

Noncompensated, Single  
Industrial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
High Performance, Bipolar	$\pm 5$	$\pm 22$	2	75	50	1	0.5	LM201A	D,JG,PW	SLYD001
High Performance, Low Bias Current, Bipolar	$\pm 5$	$\pm 20$	2	2	50	1	0.3	LM208	D,JG,P	SLYD001
BIFET, Low Power	$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL060I	D,JG,P	SLYD001
BIFET, Low Noise	$\pm 3.5$	$\pm 18$	6	200	50	3	13	TL070I	D,JG,P	SLYD001
BIFET, Low Power				400	25	3	13	TL080I		

Noncompensated, Single  
Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
High Performance	$\pm 5$	$\pm 18$	7.5	250	15	1	7.5	LM301A	D,JG,PW	SLYD001
		$\pm 20$	7.5	7	25	1	0.3	LM308	D,JG,P	
Low Noise, High Speed, Bipolar	$\pm 4$	$\pm 22$	0.025	$\pm 35$	0.007	60	15	LT1037AC	JG,P	SLOS017
			0.060	$\pm 55$	0.005	60	15	LT1037C	JG,P	SLOS016
			0.025	$\pm 40$	1000	63	17	OP-37E		
			0.1	$\pm 80$	700	63	17	OP-37G		
BIFET, Low Power	$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL060AC	D,JG,P	SLYD001
			6	0.2	4	1	3.5	TL060BC		
			15	0.4	3	1	3.5	TL060C		
BIFET, Low Noise	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL070AC	D,JG,P	SLYD001
			10	0.2	25	3	13	TL070C		
BIFET, General Purpose	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL080AC	D,JG,P	SLYD001
			15	0.4	25	3	13	TL080C		
General Purpose, Bipolar	$\pm 9$	$\pm 18$	7.5	1500	15	1	0.3	$\mu$ A709C	D,JG,P	SLYD001
	$\pm 2$	$\pm 18$	6	500	20	1	0.5	$\mu$ A748C		

**Internally Compensated, Single  
Automotive Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
High Performance	$\pm 2$	$\pm 22$	2	75	50	1	0.5	LM207	D,J,JG,N,PW	SLYD001
	$\pm 5$	$\pm 20$	4	250	50	15	70	LM218	D,JG,P	
LinCMOS, Programmable	4	16	5	Typ 0.005	7	2.2	5.3	TLC271AI	D,JG,P	SLYD001
			2	Typ 0.005	7	2.2	5.3	TLC271BI		
			10	Typ 0.005	7	2.2	5.3	TLC271I		

**Internally Compensated, Single  
Industrial Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT	
	MIN	MAX									
Unity-Gain Voltage Follower	$\pm 5$	$\pm 18$	4	3		20	30	LM210	JG,P	SLYD001	
BIFET, Low Power	$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL061I	D,JG,P	SLYD001	
BIFET, Adjustable, Low-Power	$\pm 1.2$	$\pm 18$	6	0.2	4	1	3.5	TL066I	D,JG,P	SLYD001	
BIFET, Low Noise	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL071I	D,JG,P	SLYD001	
BIFET, General Purpose	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL081I	D,JG,P	SLYD001	
BIFET, Low Offset	$\pm 3.5$	$\pm 18$	0.5	0.2	50	3	13	TL087I	D,JG,P	SLYD001	
BIFET, Low $V_{IO}$	$\pm 3.5$	$\pm 18$	1	0.2	50	3	13	TL088I	D,JG,P	SLYD001	
Single LM324, High Performance	S/S	3	30	5	-150	50	0.6	0.3	TL321I	JG,P	SLYD001
	D/S	$\pm 1.5$	$\pm 15$								

# Internally Compensated, Single Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
BIFET	$\pm 3.5$	$\pm 18$	10	0.2	25	3	13	LF351	D,J,G,P	SLOS014
	$\pm 3.5$	$\pm 18$	2	0.2	25	3	13	LF411	D,J,G,P	SLOS011
High Performance	$\pm 2$	$\pm 18$	7.5	250	25	1	0.5	LM307	D,J,J,G,N,P,W	SLYD001
Unity-Gain Voltage Follower	$\pm 5$	$\pm 18$	7.5	7		20	30	LM310	JG,P	SLYD001
High Performance	$\pm 5$	$\pm 20$	10	250	25	15	70	LM318	D,J,G,P	SLYD001
Low Noise, High Speed, Precision Input	$\pm 2.5$	$\pm 22$	0.025	35	7000	5	2.5	LT1007AC	JG,P	SLOS017
			0.060	55	5000	5	2.5	LT1007C		
Low Noise, High Speed, Noncompensated, $A_{VCL} \geq 5$	$\pm 2.5$	$\pm 22$	0.025	35	7000	12	15	LT1037AC	JG,P	SLOS017
			0.060	55	5000	12	15	LT1037C		
Low Noise, High Performance	$\pm 3$	$\pm 22$	4	1500	25	10	13	NE5534	JG,P	SLYD001
			4	1500	25	10	13	NE5534A		
Ultra-Low Offset Voltage	$\pm 3$	$\pm 22$	0.15	7	120	0.6	0.3	OP-07C	D,J,G,P	SLYD001
			0.15	12	120	0.6	0.3	OP-07D		
			0.075	4	200	0.6	0.3	OP-07E		
Low Noise, High Speed	$\pm 3.5$	$\pm 22$	0.025	40	1000	8	2.8	OP-27E	JG,P	SLOS016
			0.1	80	700	8	2.8	OP-27G		
Low Noise, High Speed, Noncompensated, $A_{VCL} \geq 5$	$\pm 3.5$	$\pm 22$	0.025	40	1000	12	17	OP-37E	JG,P	SLOS016
			0.1	80	700	12	17	OP-37G		
BIFET, Low Power	$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL061AC	D,J,G,P	SLYD001
			3	0.2	4	1	3.5	TL061BC		
			15	0.2	3	1	3.5	TL061C		
BIFET, Adjustable, Low-Power	$\pm 1.2$	$\pm 18$	6	0.2	4	1	3.5	TL066AC	D,J,G,P	SLYD001
			3	0.2	4	1	3.5	TL066BC		
			15	0.4	3	1	3.5	TL066C		
BIFET, Low Noise	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL071AC	D,J,G,P	SLYD001
			3	0.2	50	3	13	TL071BC		
			10	0.2	25	3	13	TL071C		
BIFET, General Purpose	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL081AC	D,J,G,P	SLYD001
			3	0.2	50	3	13	TL081BC		
			15	0.4	25	3	13	TL081C		
BIFET, Low $V_{IO}$	$\pm 3.5$	$\pm 18$	0.5	0.2	50	3	13	TL087C	D,J,G,P	SLYD001
			1	0.2	50	3	13	TL088C		
Single LM324, High Performance	S/S	3	7	-250	25	0.6	0.3	TL321C	JG,P	SLYD001
	D/S	1.5								

**Internally Compensated, Single (Continued)**  
Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
LinCMOS, Programmable	1	16	5	Typ 0.005	Typ 10	2.2	5.3	TLC251AC	D,J,G,P	SLYD001
			2	Typ 0.005	Typ 10	2.2	5.3	TLC251BC		
LinCMOS, Programmable	1	16	10	Typ 0.005	Typ 10	2.2	5.3	TLC251C	D,J,G,P	SLYD001
	3	16	5	Typ 0.005	Typ 10	2.2	5.3	TLC271AC		
	3	16	3	Typ 0.005	Typ 10	2.2	5.3	TLC271BC		
	3	16	10	Typ 0.005	10 Typ	2.2	5.3	TLC271C		
General Purpose	$\pm 2$	$\pm 18$	6	500	20	1	0.5	$\mu$ A741C	D,J,G,P	SLYD001

**Internally Compensated, Dual**  
Automotive Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
High Gain, Low Power Bipolar	S/S	3	7	-250	100 Typ	0.6	0.2	LM2904	D,J,G,P,U	SLYD001
	D/S	$\pm 1.5$								
High Performance	$\pm 4$	$\pm 18$	6	-500	20	3	1.7	RV4558	D,J,G,P	SLYD001
Low Power	$\pm 1.5$	$\pm 18$	8	-500	20	1	0.6	TL322I	D,J,G,P	SLYD001
LinCMOS, High Bias	4	16	5	Typ 0.005	10	2.2	5.3	TLC272AI	D,J,G,P	SLO3004
			2	Typ 0.005	10	2.2	5.3	TLC272BI		
			10	Typ 0.005	10	2.2	5.3	TLC272I		
			0.5	Typ 0.005	10	2.2	5.3	TLC277I		
LinCMOS, Low Bias	4	16	5	Typ 0.005	30	0.1	0.05	TLC27L2AI	D,J,G,P	SLO3006
		6	2	Typ 0.005	30	0.1	0.05	TLC27L2BI		
		16	10	Typ 0.005	30	0.1	0.05	TLC27L2I		
		16	0.5	Typ 0.005	30	0.1	0.05	TLC27L7I		
LinCMOS, Medium Bias	4	16	5	Typ 0.005	20	0.6	0.6	TLC27M2AI	D,J,G,P	SLO3005
			2	Typ 0.005	20	0.6	0.6	TLC27M2BI		
			10	Typ 0.005	20	0.6	0.6	TLC27M2I		
			0.5	Typ 0.005	20	0.6	0.6	TLC27M7I		

**Internally Compensated, Dual  
Industrial Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION		SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
		MIN	MAX								
High Gain, Low Power, Bipolar	S/S	3	30	5	-150	50	0.6	0.2	LM258	D,J,G,P,U	SLYD001
	D/S	$\pm 1.5$	$\pm 1.5$								
BIFET, Low Power		$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL062I	D,J,G,P	SLYD001
BIFET, Low Noise		$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL072I	D,J,G,P	SLYD001
BIFET, General Purpose		$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL082I	D,J,G,P	SLYD001
				6	0.2	50	3	13	TL083I	J,N	
				0.5	0.2	50	3	13	TL287I	D,J,G,P	
				1	0.2	50	3	13	TL288I	D,J,G,P	

**Internally Compensated, Dual  
Commercial Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION		SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT		
		MIN	MAX										
BIFET, General Purpose		$\pm 3.5$	$\pm 18$	10	0.2	25	3	13	LF353	D,J,G,P	SLOS012		
BIFET, Low Offset		$\pm 3.5$	$\pm 18$	3	0.2	25	3	13	LF412	D,J,G,P	SLOS012		
High Gain, Low Power, Bipolar	S/S	3	30	7	-250	25	0.6	0.2	LM358	D,J,G,P,U	SLYD001		
	D/S	$\pm 1.5$	$\pm 15$										
General Purpose		$\pm 1.5$	$\pm 18$	6	500	20	1	0.5	MC1458	D,J,G,P,U	SLYD001		
Low Noise		$\pm 3$	$\pm 20$	4	800	25	10	9	NE5532	J,G,P	SLYD001		
				4	800	25	10	9	NE5532A				
High Performance		$\pm 4$	$\pm 18$	6	500	20	3	1.7	RC4558	D,J,G,P	SLYD001		
				6	250	20	4	2	RC4559	D,P			
Low Power		$\pm 2$	$\pm 18$	5	250	1	0.5	0.5	TL022C	D,J,G,P	SLYD001		
BIFET, Low Power		$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL062AC	D,J,G,P	SLYD001		
				3	0.2	4	1	3.5	TL062BC				
				15	0.4	3	1	3.5	TL062C				
BIFET, Low Noise		$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL072AC	D,J,G,P	SLYD001		
				3	0.2	50	3	13	TL072BC				
				10	0.2	25	3	13	TL072C				
BIFET, General Purpose		$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL082AC	D,J,G,P	SLYD001		
				3	0.2	50	3	13	TL082BC				
				15	0.4	25	3	13	TL082C				
				6	0.2	50	3	13	TL083AC				
				15	0.4	25	3	13	TL083C			D,J,G,N	SLYD001
				0.5	0.2	50	3	13	TL287C				
1	0.2	50	3	13	TL288C								

**Internally Compensated, Dual (Continued)**  
**Commercial Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
Low Power	$\pm 1.5$	$\pm 18$	10	-500	20	1	0.6	TL322C	D,J,G,P	SLYD001
LinCMOS, High Bias	1	16	5	Typ 0.005	10	2.2	5.3	TLC252AC	D,J,G,P	SLYD001
			2	Typ 0.005	10	2.2	5.3	TLC252BC		
			10	Typ 0.005	10	2.2	5.3	TLC252C		
LinCMOS, Low Bias	1	16	5	Typ 0.005	30	0.1	0.05	TLC25L2AC	D,J,G,P	SLYD001
			2	Typ 0.005	30	0.1	0.05	TLC25L2BC		
			10	Typ 0.005	30	0.1	0.05	TLC25L2C		
LinCMOS, Medium Bias	1	16	5	Typ 0.005	20	0.6	0.6	TLC25M2AC	D,J,G,P	SLYD001
			2	Typ 0.005	20	0.6	0.6	TLC25M2BC		
			10	Typ 0.005	20	0.6	0.6	TLC25M2C		
LinCMOS, High Bias	3	16	5	Typ 0.005	10	2.2	5.3	TLC272AC	D,J,G,P	SLO3004
			2	Typ 0.005	10	2.2	5.3	TLC272BC		
			10	Typ 0.005	10	2.2	5.3	TLC272C		
LinCMOS, Low Bias	3	16	5	Typ 0.005	30	0.1	0.05	TLC27L2AC	D,J,G,P	SLO3006
			2	Typ 0.005	30	0.1	0.05	TLC27L2BC		
			10	Typ 0.005	30	0.1	0.05	TLC27L2C		
			0.5	Typ 0.005	30	0.1	0.05	TLC27L7C		
LinCMOS, Medium Bias	3	16	5	Typ 0.005	20	0.6	0.6	TLC27M2AC	D,J,G,P	SLO3005
			2	Typ 0.005	20	0.6	0.6	TLC27M2BC		
			10	Typ 0.005	20	0.6	0.6	TLC27M2C		
			0.5	Typ 0.005	20	0.6	0.6	TLC27M7C		
LinCMOS, High Bias	3	16	0.5	Typ 0.005	10 Typ	2.2	5.3	TLC277C	D,J,G,P	SLO3004
General Purpose	$\pm 5$	$\pm 22$	6	500	25	1	0.5	$\mu$ A747C	D,J,N	SLOS009



## Internally Compensated, Quad Automotive Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu\text{s}$ ) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT	
	MIN	MAX									
Norton Amplifier, Bipolar	S/S	4.5	32	200	1.2	2.5	0.5	LM2900	J,N	SLYD001	
	D/S	$\pm 2.5$	$\pm 16$								
Extended Temperature Range LM324		3	26	7	-250	100 Typ	0.6	0.3	LM2902	D,J,N,W	SLYD001
Low Power Bipolar	S/S	3	36	8	-500	20	1	0.6	MC3303	D,J,N	SLYD001
	D/S	$\pm 1.5$	$\pm 18$								
Quad $\mu\text{A}741$		$\pm 4.5$	$\pm 18$	6	500	20	3	1.7	RV4136	D,J,N,W	SLYD001
LinCMOS, High Bias		4	16	5	0.001 Typ	10	2.2	5.3	TLC274AI	D,J,N S	SLO3001
				2	0.001 Typ	10	2.2	5.3	TLC274BI		
				10	0.001 Typ	10	2.2	5.3	TLC274I		
				0.75	0.005 Typ	10	2.2	5.3	TLC279I	D,J,N	SLO3001
LinCMOS, Low Bias		4	16	5	0.005 Typ	30	0.1	0.05	TLC27L4AI	D,J,N	SLYD001
				2	0.005 Typ	30	0.1	0.05	TLC27L4BI		
				10	0.005 Typ	30	0.1	0.05	TLC27L4I		
				5	0.005 Typ	30	0.1	0.05	TLC27L9I	D,J,N	SLO3002
LinCMOS, Medium Bias		4	16	5	0.005 Typ	20	0.6	0.6	TLC27M4AI	D,J,N	SLYD001
				2	0.005 Typ	20	0.6	0.6	TLC27M4BI		
				10	0.005 Typ	20	0.6	0.6	TLC27M4I		
				2	0.005 Typ	20	0.6	0.6	TLC27M9I	D,J,N	SLO3003

## Internally Compensated, Quad Industrial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_{IB}$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu\text{s}$ ) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT	
	MIN	MAX									
General Purpose, Bipolar		3	30	5	150	50	0.6	0.3	LM224	D,J,N,W	SLYD001
		$\pm 4$	$\pm 18$	6	200	25	1	0.5	LM248	D,J,N	
Single Supply, Norton Amplifier, Bipolar	S/S	4	32	200		1.2	2.5	0.5	LM2900	D,J,N	SLYD001
	D/S	$\pm 2$	$\pm 16$								
BIFET, Low Power		$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL064I	D,J,N	SLYD001
BIFET, Low Noise				6	0.2	50	3	13	TL074I		
BIFET, General Purpose		$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL084I	D,J,N	SLYD001

**Internally Compensated, Quad  
Commercial Temperature Range**

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT	
	MIN	MAX									
BIFET, General Purpose	$\pm 3.5$	$\pm 18$	10	0.2	25	3	13	LF347	D,J,N	SLOS013	
General Purpose	3	30	7	-250	25	0.6	0.3	LM324	D,J,N,W	SLYD001	
	$\pm 4$	$\pm 18$	6	200	25	1	0.5	LM348	D,J,N		
Single Supply, Norton Amplifier, Bipolar	S/S	4	32	200	1.2	2.5	0.5	LM3900	D,J,N	SLYD001	
	D/S	$\pm 2$	$\pm 16$								
Low Power, Bipolar	S/S	3	36	10	-500	20	1	0.6	MC3403	D,J,N	SLYD001
	D/S	$\pm 1.5$	$\pm 18$								
Quad $\mu$ A741, High Performance	$\pm 4$	$\pm 18$	6	500	20	3	1.7	RC4136	D,J,N,W	SLYD001	
General Purpose	$\pm 2$	$\pm 18$	5	250	60	0.5	0.5	TL044C	J,N,W	SLYD001	
BIFET, Low Power	$\pm 1.5$	$\pm 18$	6	0.2	4	1	3.5	TL064AC	D,J,N	SLYD001	
			18	3	0.2	4	1	3.5			TL064BC
			15	0.4	3	1	3.5	TL064C			
BIFET, Low Noise	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL074AC	D,J,N	SLYD001	
			3	0.2	50	3	13	TL074BC			
			10	0.2	50	3	13	TL074C			
			10	0.2	25	3	13	TL075C			J,N
BIFET, General Purpose	$\pm 3.5$	$\pm 18$	6	0.2	50	3	13	TL084AC	D,J,N	SLYD001	
			3	0.2	50	3	13	TL084BC			
			15	0.4	25	3	13	TL084C			
			15	0.4	25	3	13	TL085C			J,N
High Performance, Bipolar	$\pm 4$	$\pm 18$	6	500	20	3	2	TL136C	D,J,N	SLYD001	
LinCMOS, High Bias	1	16	5	0.005 Typ	10	2.2	5.3	TLC254AC	D,J,N	SLYD001	
			2	0.005 Typ	10	2.2	5.3	TLC254BC			
			10	0.005 Typ	10	2.2	5.3	TLC254C			
	3	16	5	0.005 Typ	10	2.2	5.3	TLC274AC	D,J,N	SLO3001	
			2	0.005 Typ	10	2.2	5.3	TLC274BC			
			10	0.005 Typ	10	2.2	5.3	TLC274C			
0.75	0.005 Typ	10	2.2	5.3	TLC279C	D,J,N	SLO3001				
LinCMOS, Low Bias	1	16	5	0.005 Typ	30	0.1	0.05	TLC25L4AC	D,J,N	SLO3002	
			2	0.005 Typ	30	0.1	0.05	TLC25L4BC			
			10	0.005 Typ	30	0.1	0.05	TLC25L4C			
LinCMOS, Medium Bias	1	16	5	0.005 Typ	20	0.6	0.6	TLC25M4AC	D,J,N	SLO3003	

## Internally Compensated, Quad (Continued) Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	SUPPLY VOLTAGE (V)		$V_{IO}$ (mV) MAX	$I_B$ (nA) MAX	$A_{VD}$ (V/mV) MIN	$B_1$ (MHz) TYP	SR (V/ $\mu$ s) TYP	DEVICE NUMBER	PACKAGES	DOCUMENT
	MIN	MAX								
LinCMOS, Medium Bias	1	16	2	0.005 Typ	20	0.6	0.6	TLC25M4BC	D,J,N	SLO3003
			10	0.005 Typ	20	0.6	0.6	TLC25M4C		
LinCMOS, Low Bias	3	16	5	0.005 Typ	30	0.1	0.05	TLC27L4AC	D,J,N	SLO3002
			2	0.005 Typ	30	0.1	0.05	TLC27L4BC		
			10	0.005 Typ	30	0.1	0.05	TLC27L4C		
			0.75	0.005 Typ	30	0.1	0.05	TLC27L9C		
LinCMOS, Medium Bias	3	16	5	0.005 Typ	20	0.6	0.6	TLC27M4AC	D,J,N	SLO3003
			2	0.005 Typ	20	0.6	0.6	TLC27M4BC		
			10	0.005 Typ	20	0.6	0.6	TLC27M4C		
			0.75	0.005 Typ	20	0.7	0.06	TLC27M9C		

## Differential Video Amplifiers

Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	BANDWIDTH	GAIN	DEVICE NUMBER	PACKAGES	DOCUMENT
Amplifier with 2 multiplexed inputs and wide AGC range	60 Mhz	100 max	MC1445	J,N	SLYD001
Amplifier with internal frequency compensation and adjustable/selectable gain options	90 Mhz	0 to 600	NE592	D,N	SLYD001
Similar to NE592 but with tighter gain distribution	90 Mhz	0 to 600	NE592A	D,N	SLYD001
Amplifier with a wide AGC range	60 Mhz	100	TL026	D,J,G,P	SLYD001
2-channel multiplexed Video Amp	20 Mhz	0 to 600	TL040C	D,N	SLFS012
Similar to NE592 but in an 8-Pin package	90 Mhz	0 to 600	TL592	D,P	SLYD001
Similar to NE592A but in an 8-Pin package	90 Mhz	0 to 600	TL592A	D,P	SLYD001
Low-noise version of NE592 and TL592	90 Mhz	0 to 600	TL592B	D,N,P	SLYD001
Amplifier with internal frequency compensation	200 Mhz	10, 100, 400	$\mu$ A733C	J,N	SLYD001
Amplifier with a wide AGC range	50 Mhz	38, 50, 400	TL027C	D,N,J	SLFS008
Logarithmic Amplifier	40 Mhz	Logarithmic Curve	TL441C	J,N	SLAS010

## Magnetic-Media Read and Write Circuits

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	DEVICE NUMBER	PACKAGES	DOCUMENT
Read-Amplifier System	MC3470	N	SLYD001
Tape-Read Signal Conditioner	TL041C	DW,NT	SLFS015
Disk-Memory Read-Chain Data	TL712	D,P	SLYD001
Disk-Memory Read-Chain Data Comparator with MECL III and MECL 1000	TL721	D,P	SLYD001

# Voltage Comparators

## Internally Compensated, Single Automotive Temperature Range

(Values specified at  $T_A = 25^\circ\text{C}$ )

CHANNEL TYPE	DESCRIPTION	POWER SUPPLIES		$V_{IO}$ MAX (mV)	$I_B$ MAX ( $\mu\text{A}$ )	$I_{OL}$ MIN (mA)	RESPONSE TIME TYPE (ns)	TYPE	PACKAGES	DOCUMENT
		$V_{CC+}$ NOM (V)	$V_{CC-}$ NOM (V)							
Dual	Automotive LM393	5	0	7	0.25	6	300	LM2903	D,J,G,P	SLYD001
	Ultra Low Power, Push Pull Output	5	0	5	5 pA Typ	4	1300	TLC3702I	D,J,G,P	SLNS015
Quad	Ultra Low Power, Open Drain Output	5	0	5	5 pA Typ	6	1100	TLC393I	D,J,G,P	SLNS017
	Automotive LM339 Temp.	5	0	7	0.25	6	300	LM2901	D,J,N	SLYD001
	Low Cost LM2901	5	0	20	0.5	6	300	LM3302	D,J,N	SLYD001
	Ultra Low Power, Automotive LP339, Bipolar	5	0	5	.025	20	9800	LP2901	D,J,N	SLCS004
	Open Drain Output	5	0	5	5 pA Typ	6	1100	TLC339I	D,J,N	SLNS018
	Push Pull Output	5	0	5	5 pA Typ	4	1300	TLC3704I	D,J,N	SLNS016

## Internally Compensated, Single Industrial Temperature Range

(Values specified at  $T_A = 25^\circ\text{C}$ )

CHANNEL TYPE	DESCRIPTION	POWER SUPPLIES		$V_{IO}$ MAX (mV)	$I_B$ MAX ( $\mu\text{A}$ )	$I_{OL}$ MIN (mA)	RESPONSE TIME TYPE (ns)	TYPE	PACKAGES	DOCUMENT
		$V_{CC+}$ NOM (V)	$V_{CC-}$ NOM (V)							
Single	Strobe	12	-6	2	45	100	28	LM206	D,J,J,G,N,P	SLYD001
		15	-15	3	0.1	8	115	LM211	D,J,G,P	SLCS003
	Ultra Low Power, Strobe	15	-15	7.5	0.1	1.6	1200	LP211	D,J,G,P	SLCS003
	Single LM339	5	0	5	-0.1	6	300	TL331I	D,J,G,P	SLYD001
Dual	Industrial LM393	5	0	5	0.25	6	300	LM293	D,J,G,P	SLYD001
	Industrial LM393, Low Offset	5	0	2	0.25	6	300	LM293A	D,J,G,P	SLYD001
	Low Offset	2	0	10	5 pA Typ	6	200	TLC372	D,J,G,P	SLNS002A
Quad	Industrial LM339	5	0	9	-0.4	6	300	LM239	D,J,N	SLCS004
	Industrial LM339, Low Offset	5	0	4	-0.4	6	300	LM239A	D,J,N	SLCS004
	Ultra Low Power, Industrial LP339, Bipolar	5	0	5	0.025	20	9800	LP239	D,J,N	SLCS004
	High Speed CMOS Low Offset	5	0	10	2	6	200	TLS374	D,J,N	SLNS003A

# Internally Compensated, Single Commercial Temperature Range

(Values specified at  $T_A = 25^\circ\text{C}$ )

CHANNEL TYPE	DESCRIPTION	POWER SUPPLIES		$V_{IO}$ MAX (mV)	$I_B$ MAX ( $\mu\text{A}$ )	$I_{OL}$ MIN (mA)	RESPONSE TIME TYPE (ns)	TYPE	PACKAGES	DOCUMENT
		$V_{CC+}$ NOM (V)	$V_{CC-}$ NOM (V)							
Single	Strobe	12	-6	5	40	100	28	LM306	D,,J,G,N,P	SLYD001
		15	-15	7.5	0.25	8	115	LM311	D,,J,G,P	
	Ultra Low Power, Strobe	15	-15	7.5	.1	1.6	1200	LP311	D,,J,G,P	SLCS003
	Single LM339	5	0	5	-0.25	6	300	TL331C	D,,J,G,P	SLYD001
	Strobe	12	-6	3.5	20	1.6	30	TL510C	J,G,P	SLYD001
	High Speed	12	-6	7.5	100	1.6	40	TL710C	J,J,G,N,P,U	SLYD001
	Output Enable	5	0	$\pm 100$	—	—	25	TL712	J,G,P	SLYD001
	High Speed	0	-5.2	$\pm 100$	—	—	12 Max	TL721	J,G,P	SLYD001
	Improved TL710C	12	-6	3.5	20	1.6	30	TL810C	J,G,P	SLYD001
	Strobe	+18	-18	1.5	80		150	LT1011C	J,G,PL	SLVS014
	0.5			50		150	LT1011AC	J,G,PL		
Dual	$V_{CC}$ : 2 V to 36 V	5	0	5	0.25	6	300	LM393	D,,J,G,P	SLYD001
				2	0.25	6	300	LM393A	D,,J,G,P	
	Strobes	12	-6	5	25	—	28	TL506C	J,N	SLYD001
	Dual TL510C	12	-6	3.5	20	1.6	30	TL514C	J,N	SLYD001
	Improved $\mu\text{A}711\text{C}$	12	-6	5	30	0.5	33	TL811C	J,N	SLYD001
	Dual TL810C	12	-6	3.5	20	1.6	30	TL820C	J,N	SLYD001
	Ultra Low Power, CMOS Push-Pull Output	5	0	5	5 pA Typ	4	1300	TLC3702C	D,,J,G,P	SLNS015
	High Speed, LinCMOS	5	0	10	5 pA Typ	6	200	TLC372C	D,,J,G,P	SLYD001
	Ultra Low Power, CMOS Open Drain Output	5	0	5	5 pA Typ	6	1100	TLC393C	D,,J,G,P	SLNS017
Quad	$V_{CC}$ : 2V to 36V	5	0	5	-0.15	6	300	LM339	D,,J,N	SLYD001
				2	-0.15	6	300	LM339A	D,,J,N	
	Ultra Low Power, Bipolar	5	0	5	.25	20	1300	LP339	D,,J,N	SLCS004
	Ultra Low Power, CMOS Open Drain Output	5	0	5	5 pA Typ	6	1100	TLC339C	D,,J,N	SLNS018
	Ultra Low Power, CMOS Push-Pull Output	5	0	5	5 pA Typ	4	1300	TLC3704C	D,,J,N	SLNS016
	High Speed, CMOS	5	0	10	5 pA Typ	6	200	TLC374C	D,,J,N	SLYD001
	Ultra Low Offset	5	0	10	5 pA Typ	6	200	TLC354C	D,N	SLOS008
				10	5 pA Typ	6	200	TLC352C	D,N	SLOS007

---

## Data Acquisition and Conversion Circuits

### Single-Slope and Dual-Slope A/D Converters

CONVERSION FUNCTION	RESOLUTION	SPEED (ms)	TYPE	PACKAGES	DOCUMENT
Dual-Slope Analog Processors	4 1/2 Digits	80	TL500	J	SLYD002
	3 1/2 Digits	80	TL501		
Digital Processors with Seven-Segment Outputs	4 1/2 Digits	80	TL502	N	SLYD002
Digital Processors with BCD Outputs	4 1/2 Digits	80	TL503	N	SLYD002
Dual-Slope Analog Processor	10 Bits	50	TL505	N	SLYD002
Pulse-Width Modulator for Single-Slope Converter	7 Bits	1	TL507	P	SLYD002

## Successive-Approximation and Semi-Flash A/D Converters

ADDRESS AND DATA I/O FORMAT	SIGNAL INPUTS		RESOLUTION (BITS)	CONVERSION SPEED ( $\mu$ s)	POWER DISSIPATION (TYP)	UNADJUSTED ERROR (MAX) $\pm$ LSB	TYPE	PACKAGES	DOCUMENT
	ANALOG DEDICATED	ANALOG DIGITAL							
Parallel	1	0	8	100	10 mW	0.5	ADC0803	N	SLYD002
						1.0	ADC0804		
						1.0	ADC0805		
	8	0	8	100	10 mW	0.75	ADC0808	FN,N	SLYD002
						1.25	ADC0809	FN,N	
					0.5 mW	0.75	TL0808	FN,N	
						1.25	TL0809		
	1	0	8	1	35 mW	1.0	TLC0820A	FN,N	SLYD002
						0.5	TLC0820B		
	5	6	8	15	6 mW	0.5	TLC532A	FN,N	SLYD002
30				6 mW	0.5	TLC533A			
Serial	1	0	8	84	10 mW	1.0	ADC0831A	P	SLYD002
						0.5	ADC0831B		
	2	0	8	84	10 mW	1.0	ADC0832A	N	SLYD002
						0.5	ADC0832B		
	4	0	8	84	10 mW	1.0	ADC0834A	FN,N	SLYD002
						0.5	ADC0834B		
	8	0	8	84	10 mW	1.0	ADC0838A	FN,N	SLYD002
						0.5	ADC0838B		
	11	0	8	13	6 mW	0.5	TLC540	FN,N	SLYD002
		0	8	25	6 mW	0.5	TLC541		
	19	0	8	13	6 mW	0.5	TLC545	FN,N	SLYD002
		0	8	25	6 mW	0.5	TLC546		
	1	0	8	22	6 mW	0.5	TLC548	D,P	SLYD002
		0	8	25	6 mW	0.5	TLC549		
11	0	10	31	6 mW	1.0	TLC1541	FN,N	SLYD002	

\*Includes access time.

Analog/digital inputs can be used either as digital logic inputs or inputs for analog to digital conversion. For example: The TLC532/3A can have 11 analog inputs, 5 analog inputs, and 6 digital inputs, or any combination in between.

†Differential input.

## D/A Converters (5 V to 15 V)

FUNCTION	RESOLUTION	SETTLING TIME (ns)	TYPE	PACKAGES	DOCUMENT
Single Multiplying DAC	8 Bits	100	TLC7524	D,N	SLYD002
Dual Multiplying DAC	8 Bits	100	TLC7528	N	SLYD002

## Analog Interface for Digital Signal Processors

FUNCTION	TRANSFER CHARACTERISTIC	DYNAMIC RANGE	RESOLUTION	SAMPLING RATE	ON-BOARD FILTERS	PART NUMBER	DOCUMENT
Discrete Interfaces, A/D And D/A	Linear	8 Bits	8 Bits	1 MHz (A/D)	No	TLC0820 (A/D)	SLYD002
				5 MHz (D/A)	No	TLC7524 (D/A)	
Combo (Coder/Decoder And Filters)	Companding ( $\mu$ -Law)	12 Bits	8 Bits	8 kHz	Yes	TCM29C18	SCTS021
						TCM29C19	
High-Performance Combo	Linear	14 Bits	14 Bits	19.2 kHz (Programmable)	Yes (Programmable)	TLC32040	SLAS014A

The TLC32040 has two differential inputs for the 14 bit A/D and a serial port input for the 14 bit D/A. The A/D conversion accuracy for this device is measured in terms of signal-to-quantization distortion and also in LSB over certain converter ranges. Please refer to the data sheet.

## Analog Switches and Multiplexers

FUNCTION	POWER SUPPLIES (V)	VOLTAGE RANGE (V)	TYPICAL IMPEDANCE (OHMS)	TYPE	PACKAGES	DOCUMENT
Twin SPDT	$\pm 15$	$\pm 10$	100	TL182	N	SLYD002
			150	TL185		
Dual SPST	$\pm 15$	$\pm 10$	100	TL188	P	SLYD002
Twin Dual SPST	$\pm 15$	$\pm 10$	150	TL191		
SPDT	$\pm 25$	-17 to +25	100	TL601		
Dual SPDT	$\pm 25$	-17 to +25	100	TL604	N,D,J	SLYD002
SPST with Enable	$\pm 25$	-17 to $\pm 25$	100	TL607		
SPST with Logic Inputs	$\pm 25$	-17 to 25	80	TL610		
Quad Bilateral	12	2 to 12	50	TLC4016	N,D,J	SLYD002
Analog Switch	12	2 to 12	30	TLC4066		

## Switched-Capacitor Filter ICs

FUNCTION	FILTER ORDER	SUPPLY VOLTAGE (V)	TYPE	PACKAGES	DOCUMENT
Dual Filter, General Purpose	2	$\pm 4$ to $\pm 5$	TLC10	FN,N	SLYD002
			TLC20		
Low Pass, Butterworth	4	$\pm 2.5$ to $\pm 6$	TLC04	D,P	SLYD002
			TLC14		



# POWER SUPPLY CIRCUITS

## Power Supply Supervisors

FUNCTION	SENSE INPUT SUPPLY	SENSE INPUT THRESHOLD	THRESHOLD TOLERANCE %	DEVICE NUMBER	PACKAGES	DOCUMENT
Over Voltage Monitor	*	2.6 V Typ	5	MC3423	D,P	SLVS006
Under Voltage Monitor	*	2.53 V Typ	1	TL7702A	D,P	SLYD001
	5 V	4.55 V Typ	1	TL7705A		
	9 V	7.6 V Typ	1	TL7709A		
	12 V	10.8 V Typ	1	TL7712A		
	15 V	13.2 V Typ	1	TL7715A		

\*Programmable

## Voltage Regulators

### Shunt Voltage Regulators/References

REG VOLTAGE RANGE	MINIMUM SHUNT CURRENT TO MAINTAIN REG	MAX SHUNT CURRENT	TOLERANCE	TEMPERATURE COEFFICIENT	DEVICE	PACKAGES	DOCUMENT
2.5 V (typ)	400 $\mu$ A	20 mA	0.2%	15 PPM/C (Typ)	LT1009	D,LD,LP	SLVS013
2.5 V To 30 V	500 $\mu$ A (Typ)	150 mA	4%	120 PPM/C (Typ)	TL430	D,LP	SLYD001
2.5 V To 36 V	270 $\mu$ A (Typ)	150 mA	2%	30 PPM/C (Typ)	TL431	D,LP	SLVS005

### Adjustable Series Pass Voltage Regulators

OUTPUT VOLTAGE	OUTPUT CURRENT	OUTPUT VOLTAGE RANGE	REFERENCE TOLERANCE %	MAX ( $V_I - V_O$ ) DIFFERENTIAL	DEVICE	PACKAGES	DOCUMENT
Positive Output Voltage	100 mA	1.2 V to 32 V	5	35 V	TL317	D,LP	SLVS004
	750 mA	1.25 V to 125 V	5	125 V	TL783	KC	SLYD001
	1.5 A	1.2 V to 37 V	5	40 V	LM317		
Negative Output	1.5 A	-1.2 V to -37 V	4	-40 V	LM337	KC	SLYD001
Positive or Negative	150 mA	2.0 V to 37 V	5	38 V	$\mu$ A723	N,D	SLYD001

## Positive Voltage Regulators

OUTPUT VOLTAGE V	OUTPUT CURRENT RATING	OUTPUT VOLTAGE TOLERANCE %	(TYPICAL DROPOUT) VOLTAGE	TYPE	PACKAGES	DOCUMENT
2.6	100 mA	± 10	2 V	μA78L02	LPD	SLVS010
		± 5	2 V	μA78L02A		
5	100 mA	± 5	2 V	μA78L05A	LPD	SLVS010
		± 10	2 V	μA78L05		
	150 mA	± 10	0.6 V	LM2930-5	KC	SLYD001
		± 4	0.6 V	LM330-5		
	500 mA	± 5	2 V	μA78M05	KC	SLYD001
	1.5 A	± 4	2 V	LM340-5		
± 1		2 V	TL780-5			
6	1.5 A	± 4	2 V	μA7806	KC	SLYD001
		± 5	2 V	μA78M06		
	500 mA	± 5	2 V	μA78M06		
6.2	100 mA	± 10	2 V	μA78L06	LPD	SLVS010
		± 5	2 V	μA78L06A		
8	100 mA	± 10	2 V	μA78L08	LPD	SLVS010
		± 5	2 V	μA78L08A		
	150 mA	± 10	0.6 V	LM2930-8	LPD	SLYD001
	500 mA	± 5	2 V	μA78M08	LPD	SLVS010
8.5	1.5 A	± 4	2 V	μA7808	KC	SLYD001
		± 5	2 V	μA7808		
9	100 mA	± 10	2 V	μA78L09	LPD	SLVS010
		± 5	2 V	μA78L09A		
10	100 mA	± 5	2 V	μA78L10A	LPD	SLVS010
		± 10	2 V	μA78L10		
	500 mA	± 5	2 V	μA78M10	KC	SLYD001
12	100 mA	± 5	2 V	μA78L12A	LPD	SLVS010
		± 10	2 V	μA78L12		
	500 mA	± 5	2 V	μA78M12	KC	SLYD001
		± 4	2 V	μA7812		
15	100 mA	± 4	2 V	LM340-12	KC	SLYD001
		± 1	2 V	TL780-12		
	1.5 A	± 4	2 V	μA7815		
		± 1	2 V	TL780-15		
500 mA	± 4	2 V	μA7815	LPD	SLVS010	
	± 5	2 V	μA78M15			

## Positive Voltage Regulators (Continued)

OUTPUT VOLTAGE V	OUTPUT CURRENT RATING	OUTPUT VOLTAGE TOLERANCE %	(TYPICAL DROPOUT) VOLTAGE	TYPE	PACKAGES	DOCUMENT
18	1.5 A	±4	2 V	μA7818	KC	SLYD001
20	500 mA	±5	2 V	μA78M20	KC	SLYD001
24	500 mA	±5	2 V	μA78M24	KC	SLYD001
	1.5 A	±4	2 V	μA7824		

## Negative-Voltage Regulators

OUTPUT VOLTAGE V	OUTPUT CURRENT RATING	OUTPUT VOLTAGE TOLERANCE %	(TYPICAL DROPOUT) VOLTAGE	TYPE	PACKAGES	DOCUMENT
5	100 mA	±5	1.7 V	MC79L05A	D,LP	SLVS011
		±10	1.7 V	MC79L05		
	1.5 A	±5	2 V	μA7905	D,LP	SLYD001
		±5	2 V	μA79M05		
5.2	1.5 A	±5	2 V	μA7952	KC	SLYD001
6	1.5 A	±5	2 V	μA7906	KC	SLYD001
		±5	2 V	μA79M06		
8	1.5 A	±5	2 V	μA79M08	KC	SLYD001
		±5	2 V	μA7908		
12	100 mA	±10	1.7 V	MC79L12	D,LP	SLVS011
		±5	1.7 V	MC79L12A		
	1.5 A	±5	2 V	μA7912	D,LP	SLYD001
		±5	2 V	μA79M12		
15	100 mA	±5	1.7 V	MC79L15A	D,LP	SLVS011
		±10	1.7 V	MC79L15		
	1.5 A	±5	2 V	μA79M15	KC	SLYD001
		±5	2 V	μA7915		
18	1.5 A	±5	2 V	μA7918	KC	SLYD001
20	1.5 A	±5	2 V	μA79M20	KC	SLYD001
24	1.5 A	±5	2 V	μA7924	KC	SLYD001
		±5	2 V	μA79M24		

## Switched Capacitor Voltage Converters

CONTROL TOPOLOGY	OUTPUT SWITCH	SUPPLY VOLTAGE RANGE	QUIESCENT CURRENT NO LOAD	MAXIMUM CONTINUOUS I <sub>OUT</sub>	MAXIMUM FREQUENCY	MINIMUM CONVERSION EFFICIENCY	DEVICE	PACKAGES	DOCUMENT
Voltage Mode	Single	1.5 V-9 V	200 μA	50 mA	10 KHz	95%	LTC1044	JG,L,P	SLAS013
							LTC7660		

## PWM Controllers

CONTROL TOPOLOGY	OUTPUT SWITCH	MAX SW VOLTAGE	PEAK MAX CONT I <sub>o</sub>	MAX FREQ	ERROR AMPS	LIMIT AMPS	REF	OUT STRG	UVLO	OUT CONT	DEVICE	PACKAGE	DOCUMENT
Voltage Mode, Pulse Width Modulated	Single Uncommitted	40 V	250 mA	200 kHz	2	—	5%	—	—	—	MC34060	D,N	SLVS008
	Dual Uncommitted	40 V	100 mA		2	1	5%	—	●	—	SG2524	D,N	SLYD001
								—	—	—	SG3524		
	Dual Uncommitted	40 V	250 mA	300 kHz	1	1	5%	—	—	●	TL493	D,N	SLFS014
								2	—	—	—	●	TL494
					●	—	●			TL495	N		
					—	●	●			TL594	D,N		
					●	●	●			TL595	N		
					1	—	1%	—	●	—	SG2525A	J,N	SLYD001
	—	●	—	SG3525A									
	—	●	—	SG2527A									
	—	●	—	SG3527A									
Fixed On-Time Variable Frequency Voltage Mode	Dedicated	20 V	1.2 A	40 kHz	1		10%	—	—	—	TL496	P	SLVS012
	Single Uncommitted	35 V	700 mA	50 kHz	1		5%	—	—	—	TL497A	D,N	SLVS009
Current Mode	Single Uncommitted	75 V	5 A	40 kHz	1	1	2%	—	—	—	LT1070	K,J,KV	SLVS015
	Dual Totem Low Off-state	40 V	250 mA	500 kHz	1	1	1%	—	●	—	UC3846	D,N	SLVS016
	Dual Totem High Off-state	40 V	250 mA	500 kHz	1	1	1%	—	●	—	UC3847	D,N	SLVS016

NOTE: Dedicated — Committed E and C.  
 Uncommitted — Open E, Open C.  
 Totem Pole — Active Pull-up/Down.  
 OUT STRG — Output Steering  
 OUT CONT — Output Control (single-ended or parallel)

## SPECIAL FUNCTIONS

### Timers

#### Commercial Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	OUTPUT CURRENT	TIMING		DEVICE NUMBER	PACKAGES	DOCUMENT
		FROM	TO			
Single Timer, Bipolar	$\pm 200$ mA	10 $\mu\text{s}$	Hours	NE555	D,J,G,P	SLYD001
Dual Timer, Bipolar	$\pm 200$ mA	10 $\mu\text{s}$	Hours	NE556	D,J,N	SLYD001
Single High-Speed Timer LinCMOS, 1-Volt Operation	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TCL551C	D,J,G,P	SLYD001
Dual High-Speed Timer LinCMOS, 1-Volt Operation	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TLC552C	D,J,N	SLYD001
Single High-Speed Timer LinCMOS	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TLC555C	D,J,G,P	SLYD001
Dual High-Speed Timer LinCMOS	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TLC556C	D,J,N	SLYD001
Programmable Timer/Counter	4 mA	10 $\mu\text{s}$	Days	$\mu\text{A}2240\text{C}$	N	SLYD001

#### Automotive Temperature Range

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	OUTPUT CURRENT	TIMING		DEVICE NUMBER	PACKAGES	DOCUMENT
		FROM	TO			
Single Timer, Bipolar	$\pm 200$ mA	10 $\mu\text{s}$	Hours	SA555	D,J,G,P	SLYD001
Dual Timer, Bipolar	$\pm 200$ mA	10 $\mu\text{s}$	Hours	SA556	D,J,N	SLYD001
Single High-Speed Timer LinCMOS	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TLC555I	D,J,G,P	SLYD001
Dual High-Speed Timer LinCMOS	100 mA - 10 mA	1 $\mu\text{s}$	Hours	TLC556I	D,J,N	SLYD001

## Current Mirrors

(Values specified for  $T_A = 25^\circ\text{C}$ )

DESCRIPTION	TEMPERATURE RANGE	CURRENT RATIO INPUT TO OUPUT	INPUT CURRENT RANGE	DEVICE NUMBER	PACKAGES	DOCUMENT
Programmable	0°C to 70°C	3:1 to 1:15	Variable	TL010C	P	SLYD001
	-40°C to 85°C	3:1 to 1:15	Variable	TL010I		
Fixed	0°C to 70°C	1:1	1 $\mu\text{A}$ to 1 mA	TL011C	LP	SLYD001
	-40°C to 85°C	1:1	1 $\mu\text{A}$ to 1 mA	TL011I		
	0°C to 70°C	1:2	1 $\mu\text{A}$ to 1 mA	TL012C		
	-40°C to 85°C	1:2	1 $\mu\text{A}$ to 1 mA	TL012I		
	0°C to 70°C	1:4	1 $\mu\text{A}$ to 1 mA	TL014C		
	-40°C to 85°C	1:4	1 $\mu\text{A}$ to 1 mA	TL014I		
	0°C to 70°C	1:2	2 $\mu\text{A}$ to 2 mA	TL021C		
	-40°C to 85°C	1:2	2 $\mu\text{A}$ to 2 mA	TL021I		

## Hall-Effect Products

### Hall-Effect Switches

(Values specified for  $T_A = 25^\circ\text{C}$ )

RELEASE POINT (GAUSS) MIN	OPERATING POINT (GAUSS) MAX	MINIMUM HYSTERESIS (GAUSS)	DEVICE NUMBER	PACKAGES	DOCUMENT
-250	250	50	TL170	LP	SLYD001
100	600	230	TL172	LP	SLYD001
25	450	30	TL3013	LU	SLFS004
125	500	50	TL3019	LU	SLFS005
50	350	20	TL3020	LU	SLFS006
-250	250	50	TL3101	LU	SLFS002

### Hall-Effect Linear Circuits

(Values specified for  $T_A = 25^\circ\text{C}$ )

RELEASE POINT (GAUSS) MIN	OPERATING POINT (GAUSS) MAX	MINIMUM HYSTERESIS (GAUSS)	DEVICE NUMBER	PACKAGES	DOCUMENT
-500	500	1.4	TL173	LP	SLYD001
-500	500	1.4	TL3103	LU	SLFS003

## Frequency-to-Voltage Converters

DESCRIPTION	DEVICE	PACKAGES	DOCUMENT
<ul style="list-style-type: none"> <li>▪ Output swings to ground for zero-frequency input</li> <li>▪ Only one RC network provides frequency doubling for low ripple</li> <li>▪ 8-pin versions interface directly to variable-reluctance magnetic pickups</li> </ul>	LM2917	D, P, N	SLFS011
	LM2907		

## Sonar Ranging Functions

(Values specified for  $T_A = 25^\circ\text{C}$ )

	DESCRIPTION	DEVICE NUMBER	PACKAGES	DOCUMENT
Sonar Ranging Module	Sonar ranging module for measuring distances from a range of 6 inches to 35 feet using the TL851 and TL852	SN28827	—	SLYD001
	Sonar ranging module for measuring distances from a range of 6 inches to 35 feet using the TL852 and TL853	SN28828	—	SLSS001
Controller Circuit	Control integrated circuit for use in a sonar ranging module, capable of driving 50-kHz transducers with a simple interface	TL851	N	SLYD001
Receiver Circuit	Receiver integrated circuit for use in a sonar ranging module	TL852	N	SLYD001
Control Circuit	Control integrated circuit for use in a sonar ranging module, capable of driving 40-kHz transducers with a simple interface	TL853	N	SLSS002

## Programmable Tone/Noise Generator

	DESCRIPTION	DEVICE	PACKAGES	DOCUMENT
<ul style="list-style-type: none"> <li>▪ Complex sound generators designed to provide low-cost digital tones or noise.</li> <li>▪ Programmable white-noise and attenuation functions, and simultaneous sounds under microprocessor control.</li> <li>▪ TTL compatible.</li> </ul>		SN76494	N	SLFS013

---

# OPTOELECTRONICS AND IMAGE SENSORS

## INTRODUCTION

TI offers three major categories of Optoelectronic and Image Sensor devices:

- CCD Image Sensors
- Optocouplers/ Optoisolators
- Intelligent LED Displays.

NMOS image sensors are available for line sensors, small-area sensors and large-area sensors. Solid-state image sensors offer many advantages over tube-type imagers such as Vidicons and Newicons by eliminating image lag, image burn-in, and distortion. TI's patented virtual phase technology minimizes the number of clock electrodes required by the image sensor, resulting in simpler external circuitry requirements and improved device performance.

The optocoupler/optoisolator devices are offered in metal-can and plastic dual-in-line packages. JEDEC-registered metal cans provide transistor output functions. All TI's optocouplers are UL-recognized and provide functions such as logic gates, triac, and transistor or Darlington outputs.

The red LED displays are plastic-encapsulated in dual-in-line packages that contain TTL-compatible on-board electronics to decode input signals and provide constant current to each LED.

Also included in the Selection Guide are infrared emitters and phototransistors in the hermetically sealed standard pill package.

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

## Contents

	Page
CCD Image sensors and Support Functions .....	8-2
Linear Arrays .....	8-2
Area Arrays .....	8-2
Evaluation Boards .....	8-2
Evaluation Kits .....	8-2
Recommended Support Functions for TC240 and TC241 CCD Area Array Sensors .....	8-3
Optocouplers .....	8-4
Optocouplers, 6-Pin Plastic DIP and Metal Can .....	8-4
Optocouplers, 8-Pin Plastic DIP High-Speed, Logic Gate, JEDEC Registered .....	8-5
Optocouplers, 8-Pin Plastic DIP, High-Speed, JEDEC Registered .....	8-6
Optocouplers, 8-Pin Plastic DIP, High-Speed, High-Gain, JEDEC Registered .....	8-6
Couplers, 6-Pin Plastic DIP, Triac Drivers .....	8-6
Couplers, 6-Pin Plastic DIP, Schmitt Trigger .....	8-6
Intelligent Single-Digit LED Displays .....	8-7
Infrared Emitters and Phototransistors .....	8-7
Ordering Instructions .....	8-8



# CCD IMAGE SENSORS AND SUPPORT FUNCTIONS

## Linear Arrays

DEVICE	PIXELS	PIXEL SIZE	SENSITIVITY	PACKAGE	DOCUMENT
TC102†	128 × 1	12.7 μm × 12.7 μm	3.5 V/μJ/cm <sup>2</sup>	10-pin CDIP (0.300 in)	SOYD002
TC102-1‡	128 × 1	12.7 μm × 12.7 μm	3.5 V/μJ/cm <sup>2</sup>	10-pin CDIP (0.300 in)	SOYD002
TC103†	2048 × 1	12.7 μm × 12.7 μm	3.5 V/μJ/cm <sup>2</sup>	24-pin CDIP (0.600 in)	SOYD002
TC103-1‡	2048 × 1	12.7 μm × 12.7 μm	3.5 V/μJ/cm <sup>2</sup>	24-pin CDIP (0.600 in)	SOYD002
TC104†	3456 × 1	10.7 μm × 10.7 μm	2.0 V/μJ/cm <sup>2</sup>	24-pin CDIP (0.600 in)	SOYD002
TC104-1‡	3456 × 1	10.7 μm × 10.7 μm	2.0 V/μJ/cm <sup>2</sup>	24-pin CDIP (0.600 in)	SOYD002
TC106-1‡	2592 × 1	10.7 μm × 10.7 μm	2.0 V/μJ/cm <sup>2</sup>	24-pin CDIP (0.600 in)	SOYD002

†Minimum and typical values of Write Reference (WR) and End of Scan (EOS) are specified.

‡Typical values of WR and EOS are specified.

## Area Arrays

DEVICE	PIXELS	PIXEL SIZE	SENSITIVITY‡	PACKAGE	DOCUMENT
TC210	192 (H) × 165 (V)	13.75 μm × 16.0 μm	30.0 mV/lx	6-pin 5mm O.D. Plastic	SOYD002
TC211	192 (H) × 165 (V)	13.75 μm × 16.0 μm	28.0 mV/lx	6-pin CDIP (0.300 in)	SOYD002
TC240	754 (H) × 488 (V)	11.5 μm × 27.0 μm	See Data Sheet	22-pin CDIP (0.300 in)	SOYD002
TC241	754 (H) × 488 (V)	11.5 μm × 27.0 μm	19.0 mV/lx	22-pin CDIP (0.300 in)	SOYD002

‡Measured at 16.6 ms exposure time using 550 ± 5 nm filter.

## Evaluation Boards

PART NO.	DEVICE EVALUATED	REMARKS	DOCUMENT
PC401	TC103, TC103-1, TC104, TC104-1 and TC106-1	Device socket fits TC103, TC103-1, TC104, TC104-1, and TC106-1 (See TCK Evaluation Kits below)	SOYD002
PC402	TC102 and TC102-1	Device socket fits TC102 and TC102-1 (See TCK102 below)	SOYD002

## Evaluation Kits

PART NO.	CONTENTS	REMARKS	DOCUMENT
TCK102	TC102 plus PC402	See Application section "Operating Instructions for Linear CCD Image Sensors"	SOYD002
TCK103	TC103 plus PC401	See Application section "Operating Instructions for Linear CCD Image Sensors"	SOYD002
TCK104	TC104 and PC401	See Application section "Operating Instructions for Linear CCD Image Sensors"	SOYD002
TCK106-1	TC106-1 plus PC401	See Application section "Operating Instructions for Linear CCD Image Sensors"	SOYD002

## Recommended Support Functions for TC240 and TC241 CCD Area Array Sensors

DEVICE	DESCRIPTION	SUPPLY VOLTAGE, $V_{DD}$		SUPPLY VOLTAGE, $V_{GG}$		SUPPLY VOLTAGE, $V_{SS}$		FEATURES	DOCUMENT
		MIN(V)	MAX(V)	MIN(V)	MAX(V)	MIN(V)	MAX(V)		
TL1593	Sample and hold	10	13	—	—	—	—	Acquisition time 50 ns typical	SOYD002
TMS3471	Timing generator	4.5	5.5	—	—	—	—	NTSC or RS170 television system compatible	SOYD002
TMS3472	Serial driver	—	—	0	2.5	-9	-10.5	NTSC, TS170, or PAL television system compatible	SOYD002
TMS3473	Parallel driver	—	—	0	3	-9	-10.5	NTSC, RS170, or PAL television system compatible	SOYD002



Caution. These devices have limited built-in gate protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates. Avoid shorting either OS or EOS to  $V_{SS}$  during operation to prevent damage to the amplifiers.

# OPTOCOUPLERS

## Optocouplers, 6-Pin Plastic DIP and Metal Can

DEVICE	ISOLATION VOLTAGE (kV) f = 60 Hz		MINIMUM CTR (%)	FEATURES	DOCUMENT	
	PEAK	RMS				
3N261	1.0	—	50	JEDEC, Metal Can	SOYD002	
3N262	1.0	—	100 (500 max)			
3N263	1.0	—	200 (1000 max)			
4N22A†	1.0	—	25	JEDEC, Metal Can	SOOS013	
4N23A†	1.0	—	60			
4N24A†	1.0	—	100			
4N25‡	2.5	—	20	JEDEC, Plastic DIP, UL File E-65085	SOYD002	
4N26	1.5	—	20			
4N27	1.5	—	10			
4N28	0.5	—	10			
4N35‡	3.54	2.5	100			
4N36	2.5	1.75	100	JEDEC, Plastic DIP, UL File E-65085	SOYD002	
4N37	1.5	1.05	100			
4N47§	1.0	—	50	JEDEC, Metal Can	SOYD002	
4N48§	1.0	—	100 (500 max)			
4N49§	1.0	—	200 (1000 max)			
MCT2	1.5	—	20	Plastic DIP, UL File E-65085	SOYD002	
MCT2E	3.54	2.5	20			
TIL102	1.0	—	25	Metal Can	SOYD002	
TIL103	1.0	—	100			
TIL111	1.5	—	13	Plastic DIP, UL File E-65085	SOYD002	
TIL112	1.5	—	2			
TIL113	1.5	—	300			
TIL114	2.5	—	13			
TIL115	2.5	—	2			
TIL116	2.5	—	20			
TIL117	2.5	—	50			
TIL118	1.5	—	10			
TIL119‡	1.5	—	300			
TIL119A	1.5	—	300			The "A" version has no base connection.
TIL120	1.0	—	25			Metal Can
TIL121	1.0	—	50			
TIL124	5.0	—	10	High Voltage, Plastic DIP, UL File E-65085	SOYD002	
TIL125	5.0	—	20			
TIL 126	5.0	—	50			

†JAN, JANTX, JANTXV levels to MIL-S-19500/486A USAF are also available.

‡Available in PEP3 processing also.

§JAN, JANTX, JANTXV levels to MIL-S-19500/548 are also available.

## Optocouplers, 6-Pin Plastic DIP and Metal Can (Continued)

DEVICE	ISOLATION VOLTAGE (kV) f = 60 Hz		MINIMUM CTR (%)	FEATURES	DOCUMENT
	PEAK	RMS			
TIL127	5.0	—	300	High-voltage Darlington, Plastic DIP, UL File E-65085 The "A" version has no base connection.	SOYD002
TIL128	5.0	—	300		
TIL128A	5.0	—	300		
TIL153	3.54	2.5	10	High voltage, Plastic DIP, UL File E-65085	SOYD002
TIL154	3.54	2.5	20		
TIL155	3.54	2.5	50		
TIL156	3.54	2.5	300	High-voltage Darlington, Plastic DIP, UL File E-65085 The "A" version has no base connection.	SOYD002
TIL157	3.54	2.5	300		
TIL157A	3.54	2.5	300		
TIL181	3.54	2.5	50	Plastic DIP, UL File E-65085	SOYD002
TIL186	3.54	2.5	100 (I <sub>F</sub> = 10mA)	AC input Darlington, Plastic DIP, UL File E-65085	SOYD002
TIL187	3.54	2.5	500	AC input Darlington, Plastic DIP, UL File E-65085	SOYD002
TIL188	3.54	2.5	500	Same as TIL187 except TIL188 has no base lead connection for high-EMI environment. UL File E-65085.	SOYD002
TIL189	3.54	2.5	500	High Voltage, Plastic DIP, UL File E-65085	SOYD002
TIL190	3.54	2.5	500	Same as TIL189 except TIL190 has no base lead connection for high-EMI environment. UL File E-65085.	SOYD002

## Optocouplers, 8-Pin Plastic DIP, High-Speed, Logic Gate, JEDEC Registered

(T<sub>A</sub> = 25°C unless otherwise noted)

DEVICE	CTR (MIN) V <sub>O</sub> = 0.4 V, I <sub>F</sub> = 16 mA	V <sub>OL</sub> (MAX) I <sub>F</sub> = 16 mA, T <sub>A</sub> = 0°C to 70°C	V <sub>F</sub> (MAX) I <sub>F</sub> = 16 mA	SWITCHING TIMES (MAX) I <sub>F</sub> = 16 mA	ISOLATION VOLTAGE (MIN)	DOCUMENT
				t <sub>PLH</sub> OR t <sub>PHL</sub>		
6N135	7%	0.4 V (I <sub>O</sub> = 1.1 mA)	1.7 V	1.5 μs (R <sub>L</sub> = 4.1 kΩ)	3 kV dc	SOYD002
6N136	19%	0.4 V (I <sub>O</sub> = 2.4 mA)	1.7 V	0.8 μs (R <sub>L</sub> = 1.9 kΩ)	3 kV dc	SOYD002
HCPL2502	15%	0.4 V (I <sub>O</sub> = 2.4 mA)	1.7 V	0.8 μs (R <sub>L</sub> = 1.9 kΩ)	3 kV dc	SOYD002

## Optocouplers, 8-Pin Plastic DIP, High-Speed, JEDEC Registered

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

DEVICE	$V_{OL}$ (MAX) $I_F = 5\text{ mA}$ , $I_{OL} = 13\text{ mA}$ $T_A = 0^\circ\text{C to } 70^\circ\text{C}$	$V_F$ (MAX) $I_F = 10\text{ mA}$	SWITCHING TIMES (MAX) $I_F = 7.5\text{ mA}$ , $R_L = 350\ \Omega$ , $CL = 15\text{ pF}$		ISOLATION VOLTAGE (MIN)	DOCUMENT
			$t_{PLH}$	$t_{PHL}$		
6N137	0.6 V	1.75 V	75 ns	75 ns	3 kV dc	SOYD002
HCPL2601	0.6 V	1.75 V	75 ns	75 ns	3 kV dc	SOYD002
HCPL2630 (Dual-Channel)	0.6 V	1.75 V	75 ns	75 ns	3 kV dc	SOYD002

## Optocouplers, 8-Pin Plastic DIP, High-Speed, High-Gain, JEDEC Registered

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

DEVICE	CTR (MIN) $V_O = 0.4\text{ V}$ , $I_F = 1.6\text{ mA}$ , $T_A = 0^\circ\text{C to } 70^\circ\text{C}$	$V_{OL}$ (MAX) $I_F = 1.6\text{ mA}$ , $T_A = 0^\circ\text{C to } 70^\circ\text{C}$	$V_F$ (MAX) $I_F = 1.6\text{ mA}$	SWITCHING TIMES (MAX) $I_F = 1.6\text{ mA}$		ISOLATION VOLTAGE (MIN)	DOCUMENT
				$t_{PLH}$	$t_{PHL}$		
6N138	300%	0.4 V ( $I_O = 4.8\text{ mA}$ )	1.7 V	35 $\mu\text{s}$ , $R_L = 2.2\text{ k}\Omega$	10 $\mu\text{s}$ , $R_L = 2.2\text{ k}\Omega$	3 kV dc	SOYD002
6N139	500%	0.4 V ( $I_O = 6.4\text{ mA}$ )	1.7 V	60 $\mu\text{s}$ , $R_L = 4.7\text{ k}\Omega$	25 $\mu\text{s}$ , $R_L = 4.7\text{ k}\Omega$	3 kV dc	SOYD002

## Couplers, 6-Pin Plastic DIP, Triac Drivers ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

DEVICE	$I_{FT}$ (MAX) $V_{TM} = 3\text{ V}$	$V_F$ (MAX) $I_F = 10\text{ mA}$	$V_{TM}$ (MAX) $I_{TM} = 100\text{ mA}$	$I_{DRM}$ (MAX) RATED $V_{DRM}$	dv/dt (TYP)	ISOLATION VOLTAGE (MIN)	DOCUMENT
MOC3009	30 mA	1.5 V	3 V	100 nA	12 V/ $\mu\text{s}$	7.5 kV dc	SOYD002
MOC3010	15 mA	1.5 V	3 V	100 nA	12 V/ $\mu\text{s}$	7.5 kV dc	
MOC3011	10 mA	1.5 V	3 V	100 nA	12 V/ $\mu\text{s}$	7.5 kV dc	
MOC3012	5 mA	1.5 V	3 V	100 nA	12 V/ $\mu\text{s}$	7.5 kV dc	
MOC3020	30 mA	1.5 V	3 V	100 nA	100 V/ $\mu\text{s}$	7.5 kV dc	SOYD002
MOC3021	15 mA	1.5 V	3 V	100 nA	100 V/ $\mu\text{s}$	7.5 kV dc	
MOC3022	10 mA	1.5 V	3 V	100 nA	100 V/ $\mu\text{s}$	7.5 kV dc	
MOC3023	5 mA	1.5 V	3 V	100 nA	100 V/ $\mu\text{s}$	7.5 kV dc	

## Couplers, 6-Pin Plastic DIP, Schmitt Trigger

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

DEVICE	LOGIC FUNCTION	OUTPUT CONFIGURATION	$I_{FT+}$ (MAX)	HYSTERESIS RATIO (TYP)	SWITCHING TIMES (MAX)		ISOLATION VOLTAGE (MIN)	DOCUMENT
					$t_r$ OR $t_f$	$t_{PLH}$ OR $t_{PHL}$		
OPI8012	Buffer	Totem pole	10 mA	1.4	70 ns	5 $\mu\text{s}$	3.54 kV dc	SOYD002
OPI8013	Buffer	Open collector	10 mA	1.4	70 ns	5 $\mu\text{s}$	3.54 kV dc	SOYD002
OPI8014	Inverter	Totem pole	10 mA	1.4	70 ns	5 $\mu\text{s}$	3.54 kV dc	SOYD002
OPI8015	Inverter	Open collector	10 mA	1.4	70 ns	5 $\mu\text{s}$	3.54 kV dc	SOYD002

## INTELLIGENT SINGLE-DIGIT LED DISPLAYS

DEVICE	TYPE OF CHARACTER(S)	CHARACTER HEIGHT mm (inches)	COLOR OF DISPLAY	PACKAGE	REMARKS	DOCUMENT
TIL302 TIL302A TIL303 TIL303A	7-segment	6,9 (0.270)	Red	14-lead dual-in-line plastic	Left decimal Left decimal Right decimal Right decimal	SOYD002
TIL304 TIL304A	Polarity and overflow unit	6,9 (0.270)	Red	14-lead dual-in-line plastic	Right decimal Right decimal	SOYD002
TIL305	5 × 7 alphanumeric	7,6 (0.300)	Red	14-lead dual-in-line plastic	Left decimal Left decimal	SOYD002
TIL306 TIL306A TIL307 TIL307A TIL308 TIL308A TIL309 TIL309A	7-segment	6,9 (0.270)	Red	16-lead dual-in-line plastic	Left decimal Left decimal Right decimal Right decimal Left decimal Left decimal Right decimal Right decimal	SOYD002
TIL311 TIL311A	Hexadecimal	7,6 (0.300)	Red	14-lead dual-in-line plastic	Logic includes latch, decoder, and driver. TL311 and TL311A — left and right decimals	SOYD002

## INFRARED EMITTERS AND PHOTOTRANSISTORS

### Infrared-Emitting Diodes

DEVICE	POWER OUTPUT		$\phi_{HI}$	$V_F$ (MAX) $I_F = 50$ mA	$\lambda_p$ (TYP) (nm)	FEATURES	DOCUMENT
	$P_O$ (MIN) (mW)	$I_F$ (mA)					
TIL23	0.4	50	35°	1.5 V	940	Pill package for mounting on double-sided printed circuit boards. Compatible with TIL601 Series.	SOYD002
TIL24	1.0	50	35°	1.5 V	940		
TIL25	0.75	50	35°	1.5 V	940		
TIL24HR2	1.0	50	35°	1.5 V	940		

### Phototransistors

DEVICE	LIGHT CURRENT $V_{CE} = 5$ V		DARK CURRENT (MAX) $V_{CE} = 30$ V	POWER DISSIPATION	FEATURES	DOCUMENT
	MIN	MAX				
1N5722 1N5723 1N5724 1N5725	0.5 mA 2 mA 4 mA 7 mA	3 mA 5 mA 8 mA	25 nA 25 nA 25 nA 25 nA	50 mW 50 mW 50 mW 50 mW	EIA-registered versions of TIL601 thru TIL604	SOYD002
LS600 TIL601 TIL602 TIL603 TIL604 TIL604HR2	0.8 mA 0.5 mA 2 mA 4 mA 7 mA 7 mA	3 mA 5 mA 8 mA	25 nA 25 nA 25 nA 25 nA 25 nA 25 nA	50 mW 50 mW 50 mW 50 mW 50 mW 50 mW	Pill package designed for mounting on double-sided printed board. Compatible with TIL23 series.	SOYD002

Factory orders for devices described in this guide should include a two-part or three-part number as explained in the following example.

**EXAMPLE:**      **TIL**      **604**      **HR2**

1. **Prefix**

**MUST CONTAIN TWO OR SIX LETTERS**

- TIL ..... TI DISD Opto Products
- TC ..... TI CCD Image Sensor Products
- TCK ..... TI CCD Printed Circuit Board Kits
- JAN, JANTX, JANTXV ..... Military Qualified Products
- LS ..... Light Sensor Products
- 1N, 3N, 4N, 6N ..... JEDEC Registered Products

**STANDARD SECOND-SOURCE PREFIXES**

- HCPL ..... Hewlett Packard
- MCT ..... General Instruments
- MOC ..... Motorola
- OPI ..... TRW Optron

2. **Package**

**MUST CONTAIN TWO OR SIX CHARACTERS**

Package Type	Prefix
P-DIP	TIL (100 Series) 4N Series (4N25-28, 4N35-37) HCPL, MCT, MOC, OPI
C-DIP	TC (CCD) TIL (300 Series, excluding TIL305)
PILL PACK	TIL23, TIL24, TIL24HR2 TIL601-604, TIL604HR2 LS600
HERMETIC	3N, 4N Series (4N22-24/22A-24A, 4N47-49) JAN, JANTX, JANTXV TIL102, TIL103
PCB	TIL305 CCD KITS (TCK)

3. **Unique Device Designator**

**MUST CONTAIN ONE TO SIX CHARACTERS**

- Examples:
- |      |       |
|------|-------|
| 103  | 106-1 |
| 22A  | 119A  |
| 5725 |       |

4. **Military Qualified**

(If not already specified by Prefix)

Type	MIL-STD
JAN	19500/486A or 19500/548
JANTX	
JANTXV	
HR2	750

Circuits are shipped in one of the carriers below. Unless a specific method of shipment is specified by the customer (with possible additional costs), circuits will be shipped on the most practical carrier.

- |                           |                                  |
|---------------------------|----------------------------------|
| Plug-In (Hermetic)        | Dual-In-Line (P-Dip, C-Dip, PCB) |
| — Sectional Cardboard Box | — Anti-static Slide Magazines    |
| CCD                       | Pill Pak                         |
| — Conductive Boxes        | — Anti-static Bags               |

Optoelectronics and Image Sensors



---

# TELECOMMUNICATIONS AND SPEECH PRODUCTS

Semiconductor technology provides powerful new capability to telecommunications in the form of large scale integration (LSI) and very large-scale integration (VLSI) integrated circuits. Today it is possible to put an entire u-law or a-law CODEC with a filter on a single chip to replace 50 general-purpose ICs. TI engineers can select from a broad line of technologies, including BIFET, CMOS, NMOS and conventional bipolar and linear to satisfy the requirements of specific applications.

Since 1978, Texas Instruments has produced a wide range of speech-generating devices based on the technique of pitch-excited linear predictive coding (LPC). This technique extracts data from original, recorded speech to define the control parameters for a mathematical model of the vocal tract and glottal excitation. The model is implemented as a customized digital signal processor which produces a series of digital samples representative of the acoustical waveform.

As a result, the speech generated retains all the inflection and voice characteristics of the original spoken phrase and does not possess the robotic quality often associated with synthesis-by-rule systems.

In addition to the LPC synthesis functions, a complete voice output system must contain a storage area for the compressed model data, and a control function to select the words or phrases to be spoken. As with all sampled data systems, a low-pass smoothing filter is required to remove spectral data above the valid bandwidth limit (one-half of the sampling frequency.)

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
Telecommunications Circuits .....	9-2
Switching and Transmission Products .....	9-2
Codecs, Filters, Combos .....	9-3
FSK Modems .....	9-4
Subscriber Line Control Circuits (SLCC) .....	9-5
Subscriber Products .....	9-5
Speech Products .....	9-6
Speech Synthesizers .....	9-6
Ordering Instructions .....	9-7





# TELECOMMUNICATIONS CIRCUITS

## Switching and Transmission Products

DESCRIPTION	FUNCTION	TECH-NOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT
AMI/HDB3 Transmission	Encoder/Decoder	NMOS	5 V	<ul style="list-style-type: none"> <li>▪ AMI or HDB3 encoding</li> <li>▪ Received signal diagnostics</li> <li>▪ Zero to 3 MHz bit rate</li> <li>▪ CPU interface</li> </ul>	TCM2202	28-Pin J	SCTD001
				<ul style="list-style-type: none"> <li>▪ AMI or HDB3 encoding</li> <li>▪ Received signal diagnostics</li> <li>▪ Zero to 3 MHz bit rate</li> </ul>	TCM2222	16-Pin J	
	Equipment Line-Interface	Bipolar	5 V	<ul style="list-style-type: none"> <li>▪ Serial bipolar data rates up to 3 MHz</li> <li>▪ Low-Q clock extraction</li> <li>▪ Two Albo taps with 42 dB range</li> <li>▪ Phase adjust for recovered clock</li> <li>▪ Direct interface with TCM2202/2222</li> </ul>	TCM2203	28-Pin J	SCTD001

## Codecs, Filters, Combos

DESCRIPTION	FUNCTION	TECHNOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT
PCM Interface	CODEC	NMOS	12 V, ± 5 V	<ul style="list-style-type: none"> <li>Provides <math>\mu</math>-Law companding</li> <li>Compatible with CCITT recommendations G.711 and G.712</li> <li>Optional programmable time-slot selection</li> </ul>	TCM2909	22-Pin J, N	SCTD001
				<ul style="list-style-type: none"> <li>Compatible with CCITT recommendations G.711 and G.712</li> <li><math>\mu</math>-255-Law encoding and</li> <li>8th-bit signaling</li> <li>Optional programmable time-slot selection</li> </ul>	TCM2910A	24-Pin J, N	
	Line Filter	NMOS	± 5 V	<ul style="list-style-type: none"> <li>High-pass transmit filter for rejection of all low-frequency noise</li> <li>6th-order low-pass transmit filter</li> <li>CCITT G.172 compatible</li> <li>AT&amp;T D3/D4 compatible</li> </ul>	TCM2912B	20-Pin J	SCTD001
				<ul style="list-style-type: none"> <li>High-pass transmit filter for rejection of all low-frequency noise</li> <li>6th-order low-pass transmit filter</li> <li>CCITT G.172 compatible</li> <li>AT&amp;T D3/D4 compatible</li> <li>Three-state PWRO+ and PWRO-outputs</li> </ul>	TCM2912C		
	Combo	NMOS	± 5 V	<ul style="list-style-type: none"> <li>Synchronous, <math>\mu</math>-Law, A-Law coding</li> <li>Variable data rate</li> <li>Fixed data rate 1.536 MHz, 1.544 MHz, 2.048 MHz</li> </ul>	TCM2913	20-Pin J	SCTD001
				<ul style="list-style-type: none"> <li>Synchronous/asynchronous</li> <li><math>\mu</math>-Law, A-Law coding, 8th-bit signaling</li> <li>Variable data rate</li> <li>Fixed data rate 1.536 MHz, 1.544 MHz, 2.048 MHz</li> </ul>	TCM2914	24-Pin J 28-Pin FN	
				<ul style="list-style-type: none"> <li>Synchronous, <math>\mu</math>-Law, variable data rate</li> <li>Fixed data rate 2.048 MHz</li> </ul>	TCM2916	16-Pin J	
<ul style="list-style-type: none"> <li>Synchronous, A-Law, variable data rate</li> <li>Fixed data rate 2.048 MHz</li> </ul>				TCM2917			

## Codecs, Filters, Combos (Continued)

DESCRIPTION	FUNCTION	TECH-NOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT	
PCM Interface	Combo	CMOS	± 5 V	<ul style="list-style-type: none"> <li>• Synchronous, <math>\mu</math>-Law, A-Law coding</li> <li>• Variable data rate</li> <li>• Fixed data rate 1.536 MHz, 1.544 MHz, 2.048 MHz</li> </ul>	TCM29C13	20-Pin J,DW	SCTD001	
				<ul style="list-style-type: none"> <li>• Synchronous/asynchronous <math>\mu</math>-Law, A-Law coding, 8th-bit signaling</li> <li>• Variable data rate</li> <li>• Fixed data rate 1.536 MHz, 1.544 MHz, 2.048 MHz</li> </ul>	TCM29C14	24-Pin J,DW 28-Pin FN		
				<ul style="list-style-type: none"> <li>• Synchronous, <math>\mu</math>-Law, variable data rate</li> <li>• Fixed data rate 2.048 MHz</li> </ul>	TCM29C16	16-Pin J		
				<ul style="list-style-type: none"> <li>• Synchronous, A-Law, variable data rate</li> <li>• Fixed data rate 2.048 MHz</li> </ul>	TCM29C17			
				<ul style="list-style-type: none"> <li>• Analog interface for DSP</li> <li>• Variable Data rate</li> <li>• 2.048 MHz</li> <li>• <math>\mu</math>-Law coding</li> </ul>	TCM29C18	16-Pin N		SCTS021
				<ul style="list-style-type: none"> <li>• Analog Interface for DSP</li> <li>• Variable data rate</li> <li>• 1.536 MHz</li> <li>• <math>\mu</math>-Law Coding</li> </ul>	TCM29C19	16-Pin N		SCTS021

## FSK Modem/UART

DESCRIPTION	FUNCTION	TECH-NOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT
Modem	Bell 202/CCITT V.23	CMOS	5 V	<ul style="list-style-type: none"> <li>• Asynchronous</li> <li>• Half-duplex operation up to 1200 baud</li> <li>• Full-duplex operation 1200/150 baud, reversible</li> </ul>	TCM3105	16-Pin J	SCTD001
Converter/Controller	Octal Receiver/Transmitter	NMOS	5 V	<ul style="list-style-type: none"> <li>• Programmable baud rates: 50 to 19,200</li> </ul>	TCM78808	68-Pin FN, HA, HB	SCTS022

## Subscriber Line Control Circuits (SLCC)

DESCRIPTION	FUNCTION	TECH-NOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT
Subscriber Line Control Circuits	TTL-compatible	CMOS	± 5 V	▪ Three selectable balance TCM4204A networks	TCM4204A	24-Pin J	SCTD001
				▪ Three selectable balance networks ▪ Three auxiliary relay outputs ▪ Ground-start operation	TCM4205A	28-Pin J	
				▪ Flux-canceling option ▪ Two selectable balance networks	TCM4207A	24-Pin J	
	Quad DC-to-DC Converter	CMOS	± 5 V	▪ High switching frequency: 256 kHz typ	TCM4208	20-Pin J	SCTD001
	Quad Telephone Relay Driver	Bipolar	5V, -60V	▪ 50-mA output current capability	DS3680	14-Pin D, J, N	SCTD001

## Subscriber Products


DESCRIPTION	FUNCTION	TECH-NOLOGY	SUPPLY VOLTAGE	PRODUCT FEATURES	TYPE	PACKAGE	DOCUMENT
Ringers	Telephone Tone Ringer Drivers	BIDFET	40-150 Vac	▪ Output center frequency (Hz): 2000	TCM1531	8-Pin P	SCTD001
					TCM1501B		SCTS020
				▪ Output Center Frequency (Hz): 1250	TCM1532	8-Pin P	SCTD001
					TCM1512B		
				▪ Output Center Frequency (Hz): 500	TCM1536		
TCM1506B							
	TCM1539						
Ring Detector	TTL/MOS Output	BIDFIT	40-150 Vac	▪ TTL/MOS output, transient protection	TCM1520A		SCTD001
Tone Encoder	DTMF Standard	CMOS	3.5-10 V	▪ SPST/DPST keyboard or electronic input ▪ Low impedance tone output	TCM5087	16-Pin N	SCTD001
				▪ Transmitter switch and mute output ▪ DPST keyboard or electronic input ▪ Keyboard active output	TCM5089		
Optocoupler	TTL-Compatible	Bipolar	12 V	▪ Peak high-voltage isolation: 3.54 kV	TIL181	6-Pin CP-7	SCTD001

## SPEECH PRODUCTS

### Speech Synthesis Circuits

CATEGORY	DESCRIPTION	PROCESS	LPC	MEMORY	SUPPLY VOLTAGE	MASK CHARGE	DEVICE NUMBER	PACKAGE	DOCUMENT
Synthesizer, Microprocessor, and Memory	28-pin speech and control system with 64K-bit ROM and 128-byte RAM memory with 2.5 8-bit interface ports	CMOS	10	64K bytes	4-6 V	Yes	TSP50C40A	N	SPSS007
Synthesizer	LPC-10 voice synthesizer with 4-bit control bus	PMOS	10	NA	9 V	No	TSP5110A	N	SPSS009
	LPC-10 voice synthesizer with 8-bit control bus	PMOS	10	NA	9 V	No	TSP5220C		
	LPC-12 high-quality voice synthesizer with 6-pole low-pass filter	CMOS	12	NA	4-6 V	No	TSP50C50	J,N	SLYD002
Memory Serial Output ROM	128-bit ROM for use with the TSP5110A and TSP5220C	PMOS	NA	128K bytes	9 V	Yes	TSP6100	N	SPSS008
	256-bit ROM for use with the TSP50C4X series and TSP50C50	CMOS	NA	256K bytes	4-6 V	Yes	TSP60C20	N	SLYD002

Factory orders for circuits described in this guide should include a four-part type number as explained in the following example.

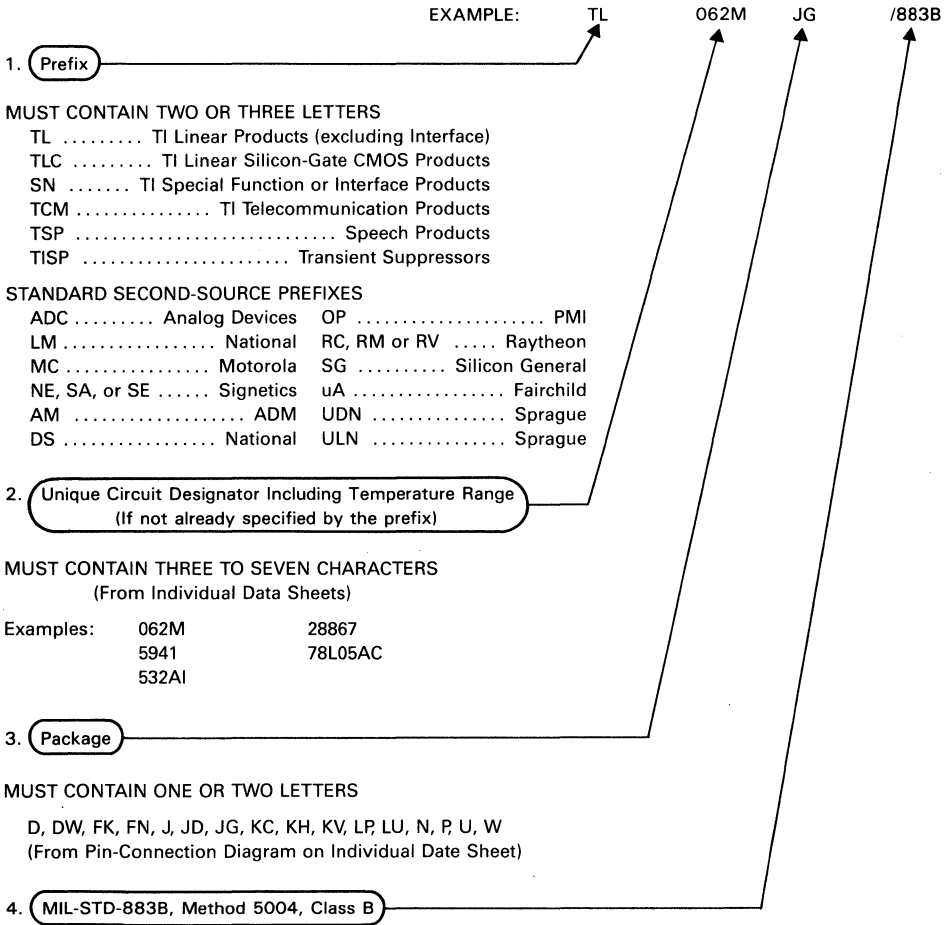

**OMIT/883B WHEN NOT APPLICABLE**

Circuits are shipped in one of the carriers below. Unless a specific method of shipment is specified by the customer (with possible additional costs), circuits will be shipped on the most practical carrier.

- |  |  |  |
|--|--|--|
| <p><b>Dual-In-Line (D, DW, J, JD, JG, N, P)</b></p> <ul style="list-style-type: none"> <li>— Slide Magazines</li> <li>— A-Channel Plastic Tubing</li> <li>— Barnes Carrier</li> <li>— Sectioned Cardboard Box</li> <li>— Individual Cardboard Box</li> </ul> | <p><b>Plug-In (LP, LU)</b></p> <ul style="list-style-type: none"> <li>— Barnes Carrier</li> <li>— Sectional Cardboard Box</li> <li>— Individual Cardboard Box</li> </ul> <p><b>Chip Carriers (FK, FN)</b></p> <ul style="list-style-type: none"> <li>— Anti-Static Plastic Tubing</li> </ul> | <p><b>Flat (U, W)</b></p> <ul style="list-style-type: none"> <li>— Barnes Carrier</li> <li>— Milton Ross Carrier</li> </ul> <p><b>Power Tab (KC, KH, KV)</b></p> <ul style="list-style-type: none"> <li>— Sleeves</li> </ul> |
|--|--|--|



---

# MEMORY PRODUCTS

At the heart of TI semiconductor development are memory products. The technology developed for Dynamic Random Access Memories (DRAMs) has given TI the processing base to create extensive lines ranging from high-performance logic products to sophisticated application processors. Included in TI's MOS Memory product line are DRAMs, Single-in-line Package DRAM memory modules (SIPs), Erasable Programmable Read-Only Memories (EPROMs), high-speed CMOS EPROMs with 35 ns access times, and One-Time-Programmable Read-Only Memories (PROMs).

First-In First-Out memories (FIFOs) are part of TI's bipolar product line. Utilizing TI's proprietary IMPACT™ process – a spin-off from DRAM technology which offers significant performance increases – these high-performance bipolar memories include 16x4, 16x5, 64x4, and 64x5 zero fall-through and toggle fall-through FIFOs with an overall operating speed of up to 30 MHz.

TI's MOS and bipolar memories meet stringent quality and reliability standards, making them suitable for programs such as ship-to-stock and just-in-time delivery. With DRAMs, TI also encourages self/joint qualification and will support customers with a huge data base of pertinent quality and reliability information.

Readers should refer to the Catalog Products Alphanumeric Index in Section 1, and to Section 12 of the Master Selection Guide for additional information on technical documentation.

<b>Contents</b>	<b>Page</b>
MOS Memory .....	10-2
MOS EPROMs .....	10-2
MOS PROMs .....	10-3
MOS DRAMs .....	10-4
Dynamic RAM Modules .....	10-5
EPROM Cross Reference Guide .....	10-6
MOS Memory Ordering Instructions .....	10-8
Bipolar Memory .....	10-9
First-In First-Out Memories (FIFOs) .....	10-9
Bipolar Memory Ordering Instructions .....	10-10



# MOS MEMORY PRODUCTS

## MOS EPROM

DENSITY (BITS)	ORGANIZATION (WORDS × BITS)	TYPE	MAX ACCESS TIME (ns)	POWER SUPPLY (V)	MAX POWER DISSIPATION		PACKAGES	COMMENTS	DOCUMENT
					ACTIVE (mW)	STANDBY (mW)			
16K	2K × 8 High Speed	TMS27C292	35	5 ± 5%	394	N/A	J	High Speed CMOS EPROM	SMLS291A
			45	5 ± 5%	315				
			45	5 ± 10%	330				
			50	5 ± 10%	303				
32K	4K × 8	TMS2732A	170	5 ± 5%	657	158	J	NMOS, JEDEC Standard Pinout	SMYD006
			200						
			250						
			450						
64K	8K × 8	TMS2764	170	5 ± 5%	788	184	J	NMOS	SMYD006
			200						
			250						
			450						
		TMS27C64	150	5 ± 5%	158	1.4	J	CMOS	SMLS064
			150	5 ± 10%	165				
			200	5 ± 5%	158				
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				
128K	16K × 8	TMS27C128	150	5 ± 5%	158	1.4	J	CMOS	SMLS128A
			150	5 ± 10%	165				
			200	5 ± 5%	158				
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				
256K	32K × 8	TMS27C256	150	5 ± 5%	158	1.4	J	CMOS	SMLS256A
			170	5 ± 5%	158				
			170	5 ± 10%	165				
			200	5 ± 5%	158				
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
450	5 ± 10%	165							
512K	64K × 8	TMS27C512	200	5 ± 5%	158	1.4	J	CMOS	SMLS512A
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				

## MOS EPROM (Continued)

DENSITY (BITS)	ORGANIZATION (WORDS × BITS)	TYPE	MAX ACCESS TIME (ns)	POWER SUPPLY (V)	MAX POWER DISSIPATION		PACKAGES	COMMENTS	DOCUMENT
					ACTIVE (mW)	STANDBY (mW)			
1024K	64K × 16	TMS27C210	200	5 ± 5%	TBD	TBD	J	CMOS	SMLS210
			200	5 ± 10%					
			250	5 ± 5%					
			250	5 ± 10%					
			300	5 ± 5%					
	300	5 ± 10%							
	128K × 8	TMS27C010	200	5 ± 5%	TBD	TBD	J	CMOS	SMLS010
			200	5 ± 10%					
			250	5 ± 5%					
			250	5 ± 10%					
300			5 ± 5%						
300	5 ± 10%								

## MOS PROM (One-Time Programmable)

DENSITY (BITS)	ORGANIZATION (WORDS × BITS)	TYPE	MAX ACCESS TIME (ns)	POWER SUPPLY (V)	MAX POWER DISSIPATION		PACKAGES	COMMENTS	DOCUMENT
					ACTIVE (mW)	STANDBY (mW)			
64K	8K × 8	TMS27PC64	150	5 ± 5%	158	1.4	N	CMOS	SMLS064
			150	5 ± 10%	165				
			200	5 ± 5%	158				
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				
128K	16K × 8	TMS27PC128	200	5 ± 5%	158	1.4	FM, N	CMOS	SMPS128A
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				
256K	32K × 8	TMS27PC256	200	5 ± 5%	158	1.4	FM, N	CMOS	SMPS256A
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				
512K	64K × 8	TMS27PC512	200	5 ± 5%	158	1.4	FM, N	CMOS	SMPS512
			200	5 ± 10%	165				
			250	5 ± 5%	158				
			250	5 ± 10%	165				
			300	5 ± 5%	158				
			300	5 ± 10%	165				
			450	5 ± 5%	158				
			450	5 ± 10%	165				

# MOS DRAM

DENSITY (BITS)	ORGANIZATION (WORDS × BITS)	TYPE	MAX ACCESS TIME (ns)	POWER SUPPLY (V)	MAX POWER DISSIPATION		PACKAGES	COMMENTS	DOCUMENT
					ACTIVE (mW)	STANDBY (mW)			
256K	256K × 1	TMS4256	100 120 150	5	385 358 330	25 25 25	FM, N	Page Mode	SMQS256B
		TMS4257	100 120 150	5	385 358 330	25 25 25	FM, N	Nibble Mode	
	64K × 4	TMS4464	100 120 150	5	385 358 330	28 28 28	FM, N		SMBS464B
		TMS4461	120 150	5	935 770	110 110	N, SD	Multiport Video RAM	SMVS011A
1M	1M × 1	TMS4C1024	100 120 150	5	413 385 385	28	DJ, N	Enhanced Page Mode	SMGS024A
		TMS4C1025	100 120 150	5	413 385 385	28	DJ, N	Nibble Mode	SMGS025
		TMS4C1027	100 120 150	5	413 385 385	28	DJ, N	Static Column Decode	SMGS027
	256K × 4	TMS44C256	100 120 150	5	413 385 385	28	DJ, N	Enhanced Page Mode	SMGS256
		TMS44C257	100 120 150	5	413 385 385	28	DJ, N	Static Column Decode	SMGS257

## Dynamic RAM Modules

DENSITY (BITS)	ORGANIZATION (WORDS × BITS)	TYPE	MAX ACCESS TIME (ns)	POWER SUPPLY (V)	MAX POWER DISSIPATION		PACKAGES	COMMENTS	DOCUMENT
					ACTIVE (mW)	STANDBY (mW)			
1024K	1M × 1	TM4256FC1	100 120 150	5	385 358 330	99 99 99	Leaded	22-Pin	SMMS561A
	256K × 4	TM4256EC4	100 120 150	5	1540 1432 1320	99 99 99	Leaded	22-Pin	SMMS564B
2048K	256K × 8	TM4256FL8	100 120 150	5	3080 2864 2640	198 198 198	Leaded	30-Pin	SMMS568A
		TM4256GU8	100 120 150	5	3080 2864 2640	198 198 198	Socketable	30-Lead	
2304K	256K × 9	TM4256EL9	100 120 150	5	3465 3218 2970	226 226 226	Leaded	30-Pin	SMMS569A
		TM4256GU9	100 120 150	5	3465 3218 2970	226 226 226	Socketable, Presence Detect	30-Lead	
4096K	1 MEG × 4	TM024HAC4	100 120 150	5	1652 1540 1540	110 110 110	Leaded	CMOS, 24-Pin	SMMS104
8192K	1 MEG × 8	TM024GAD8	100 120 150	5	3304 3080 3080	220 220 220	Socketable, Presence Detect	CMOS, 30-Lead	SMMS102B
9216K	1 MEG × 9	TM024EAD9	100 120 150	5	3717 3465 3465	248 248 248	Socketable	CMOS 30-Lead	SMMS102B

# EPROM CROSS REFERENCE GUIDE

COMPETITOR PART NUMBER	TEXAS INSTRUMENTS PART NUMBER	COMPETITOR PART NUMBER	TEXAS INSTRUMENTS PART NUMBER
<b>AMD</b>		<b>HITACHI (Continued)</b>	
AM27128A-1DC .....	TMS27C128-1JL	HN27C256G-25 .....	TMS27C256JL
AM27128A-25DC .....	TMS27C128-25JL	HN27C256G-30 .....	TMS27C256-3JL
AM27128A-2DC .....	TMS27C128-2JL		
AM27128A-30DC .....	TMS27C128-30JL	<b>INTEL</b>	
AM27128A-3DC .....	TMS27C128-3JL	D27128 .....	TMS27C128JL
AM27128A-45DC .....	TMS27C128-45JL	D27128-25 .....	TMS27C128-25JL
AM27128A-4DC .....	TMS27C128-4JL	D27128-3 .....	TMS27C128-3JL
AM27128ADC .....	TMS27C128JL	D27128-30 .....	TMS27C128-30JL
AM27256-1DC .....	TMS27C256-1JL	D27128-4 .....	TMS27C128-4JL
AM27256-20DC .....	TMS27C256-20JL	D27128-45 .....	TMS27C128-45JL
AM27256-25DC .....	TMS27C256-25JL	D27128A .....	TMS27C128JL
AM27256-2DC .....	TMS27C256-2JL	D27128A-1 .....	TMS27C128-1JL
AM27256-30DC .....	TMS27C256-30JL	D27128A-2 .....	TMS27C128-2JL
AM27256-3DC .....	TMS27C256-3JL	D27128A-20 .....	TMS27C128-20JL
AM27256-45DC .....	TMS27C256-45JL	D27128A-25 .....	TMS27C128-25JL
AM27256-4DC .....	TMS27C256-4JL	D27128A-3 .....	TMS27C128-3JL
AM27256DC .....	TMS27C256JL	D27128A-30 .....	TMS27C128-30JL
AM2732B-305DC .....	TMS2732A-30JL*	D27256 .....	TMS27C256JL
AM2732B-455DC .....	TMS2732A-45JL*	D27256-1 .....	TMS27C256-1JL
AM2732BDC .....	TMS2732A-25JL*	D27256-2 .....	TMS27C256-2JL
AM27512-3DC .....	TMS27C512-3JL	D27256-20 .....	TMS27C256-20JL
AM27512DC .....	TMS27C512JL	D27256-25 .....	TMS27C256-25JL
AM2764A-2DC .....	TMS2764-20JL*	D27256-3 .....	TMS27C256-3JL
AM2764A-3DC .....	TMS2764-25JL*	D27256-30 .....	TMS27C256-30JL
AM2764A-4DC .....	TMS2764-45JL*	D2732A .....	TMS2732A-25JL
AM2764ADC .....	TMS2764-25JL*	D2732A-2 .....	TMS2732A-20JL
		D2732A-3 .....	TMS2732A-30JL
		D2732A-4 .....	TMS2732A-45JL
<b>CYPRESS</b>		D27512 .....	TMS27C512JL
CY7C292-35DC .....	TMS27C292-3JL	D27512-2 .....	TMS27C512-2JL
CY7C292-50DC .....	TMS27C292-50JL	D27512-3 .....	TMS27C512-3JL
<b>FUJITSU</b>		D2764A .....	TMS2764-25JL
MBM27128-20Z .....	TMS27C128-2JL	D2764A-2 .....	TMS2764-20JL
MBM27128-25Z .....	TMS27C128JL	D2764A-3 .....	TMS2764-25JL
MBM27128-30Z .....	TMS27C128-3JL	D2764A-4 .....	TMS2764-45JL
MBM27256-20Z .....	TMS27C256-2JL	D27C256 .....	TMS27C256JL
MBM27256-25Z .....	TMS27C256JL	D27C256-1 .....	TMS27C256-1JL
MBM27256-30Z .....	TMS27C256-3JL	D27C256-2 .....	TMS27C256-2JL
MBM2764-20Z .....	TMS2764-20JL	D27C256-20 .....	TMS27C256-20JL
MBM2764-25Z .....	TMS2764-25JL	D27C256-25 .....	TMS27C256-25JL
MBM2764-30Z .....	TMS2764-25JL	D27C256-3 .....	TMS27C256-3JL
MBM27C256-20Z .....	TMS27C256-2JL	D27C256-30 .....	TMS27C256-30JL
MBM27C256-25Z .....	TMS27C256JL		
MBM27C256-30Z .....	TMS27C256-3JL	<b>MITSUBISHI</b>	
MBM27C512-25Z .....	TMS27C512JL	M5L27128 .....	TMS27C128JL
MBM27C512-30Z .....	TMS27C512-3JL	M5L27128-2 .....	TMS27C128-2JL
		M5L27128-3 .....	TMS27C128-3JL
<b>GI</b>		M5L27256K .....	TMS27C256JL
27256-20 .....	TMS27C256-20JL**	M5L27256K-2 .....	TMS27C256-2JL
27256-25 .....	TMS27C256-25JL**	M5L27256K-3 .....	TMS27C256-3JL
27C128-20 .....	TMS27C128-20JL**	M5L2764K .....	TMS2764-25JL
27C128-25 .....	TMS27C128-25JL**	M5L2764K-2 .....	TMS2764-20JL
27C256-20 .....	TMS27C256-20JL**	M5M27C128K-2 .....	TMS27C128-2JL
27C256-25 .....	TMS27C256-25JL**	M5M27C128K .....	TMS27C128JL
		M5M27C128K-3 .....	TMS27C128-3JL
<b>HITACHI</b>		M5M27C256K .....	TMS27C256JL
HG27128AG-17 .....	TMS27C128-1JL	M5M27C256K-2 .....	TMS27C256-2JL
HG27128AG-20 .....	TMS27C128-2JL	M5M27C256K-3 .....	TMS27C256-3JL
HG27128AG-25 .....	TMS27C128JL		
HN27256G-25 .....	TMS27C256JL	<b>NATIONAL</b>	
HN27256G-30 .....	TMS27C256-3JL	NMC27C256Q20 .....	TMS27C256-2JL
HN27512G-25 .....	TMS27C512JL	NMC27C256Q25 .....	TMS27C256JL
HN27512G-30 .....	TMS27C512-3JL	NMC27C256Q250 .....	TMS27C256-25JL
HN27C256G-17 .....	TMS27C256-1JL	NMC27C256Q45 .....	TMS27C256-4JL
HN27C256G-20 .....	TMS27C256-2JL		

\* AMD 32K, 64K devices use a 12.5 volt programming voltage, versus TI devices, which use 21 volts.


\*\* Note on VTI and GI cross reference: Many end-users may use TI's 5% V<sub>CC</sub> 128K or 256K EPROM, designated by a single digit dash number, as an alternative.

COMPETITOR PART NUMBER	TEXAS INSTRUMENTS PART NUMBER	COMPETITOR PART NUMBER	TEXAS INSTRUMENTS PART NUMBER
<b>NEC</b>		<b>TOSHIBA (Continued)</b>	
μPD27128D .....	TMS27C128JL	TMM27256AD .....	TMS27C256JL
μPD27128D2 .....	TMS27C128-2JL	TMM27512-20 .....	TMS27C512-2JL
μPD2764D .....	TMS2764-25JL	TMM27512-25 .....	TMS27C512JL
μPD2764D2 .....	TMS2764-20JL	TMM27512-30 .....	TMS27C512-3JL
μPD27256D .....	TMS27C256JL	TMM2764AD20 .....	TMS2764-20JL
μPD27C256AD15 .....	TMS27C256-1JL	<b>VTI</b>	
μPD27C256AD20 .....	TMS27C256-2JL	VT27C128-20DC .....	TMS27C128-20JL**
μPD27C256D15 .....	TMS27C256-1JL	VT27C128-25DC .....	TMS27C128-25JL**
μPD27C256D20 .....	TMS27C256-2JL	VT27C128-30DC .....	TMS27C128-30JL**
μPD27C256D25 .....	TMS27C256JL	VT27C256-20DC .....	TMS27C256-20JL**
μPD27C512D20 .....	TMS27C512-2JL	VT27C256-25DC .....	TMS27C256-25JL**
<b>OKI</b>		VT27C256-30DC .....	TMS27C256-30JL**
MSM27128A .....	TMS27C128JL	<b>WAFERSCALE</b>	
MSM27256 .....	TMS27C256JL	WS57C191-45D .....	TMS27C292-45JL
MSM2764-20RS .....	TMS2764-20JL	WS57C191-50D .....	TMS27C292-50JL
MSM2764-25RS .....	TMS2764-25JL		
MSM2764-30RS .....	TMS2764-25JL		
MSM27C128 .....	TMS27C128JL		
MSM27C256 .....	TMS27C256JL		
<b>SEEQ</b>			
DQ27128-2 .....	TMS27C128-2JL		
DQ27128-20 .....	TMS27C128-20JL		
DQ27128-25 .....	TMS27C128-25JL		
DQ27128-3 .....	TMS27C128-3JL		
DQ27128-30 .....	TMS27C128-30JL		
DQ27128-4 .....	TMS27C128-4JL		
DQ27128-45 .....	TMS27C128-45JL		
DQ27256 .....	TMS27C256JL		
DQ27256-25 .....	TMS27C256-25JL		
DQ27256-3 .....	TMS27C256-3JL		
DQ27256-30 .....	TMS27C256-30JL		
DQ2764-2 .....	TMS2764-20JL		
DQ2764-3 .....	TMS2764-25JL		
DQ2764-4 .....	TMS2764-45JL		
DQ27C256 .....	TMS27C256JL		
DQ27C256-25 .....	TMS27C256-25JL		
DQ27C256-3 .....	TMS27C256-3JL		
DQ27C256-30 .....	TMS27C256-30JL		
DQ27C256-4 .....	TMS27C256-4JL		
DQ27C256-45 .....	TMS27C256-45JL		
<b>SGS</b>			
M2732A-2F1 .....	TMS2732A-20JL		
M2732A-3F1 .....	TMS2732A-30JL		
M2732A-4F1 .....	TMS2732A-45JL		
M2732AF1 .....	TMS2732A-25JL		
M2764A-2F1 .....	TMS2764-20JL		
M2764A-4F1 .....	TMS2764-45JL		
M2764A-25F1 .....	TMS2764-25JL		
M27256F1 .....	TMS27C256JL		
M27256-3F1 .....	TMS27C256-3JL		
<b>SIGNETICS</b>			
27C256-20F .....	TMS27C256-2JL		
27C256-25F .....	TMS27C256JL		
<b>TOSHIBA</b>			
TC57256AD20 .....	TMS27C256-2JL		
TC57256AD25 .....	TMS27C256JL		
TC57256D20 .....	TMS27C256-2JL		
TC57256D25 .....	TMS27C256JL		
TMM27128-20AD .....	TMS27C128-2JL		
TMM27128-25AD .....	TMS27C128JL		

\* AMD 32K, 64K devices use a 12.5 volt programming voltage, versus TI devices, which use 21 volts.

\*\* Note on VTI and GI cross reference: Many end-users may use TI's 5%  $V_{CC}$  128K or 256K EPROM, designated by a single digit dash number, as an alternative.

MOS memory device numbering system




	Max Access		
TMS Commercial MOS	- 3	35 ns	
TMX Pre-production MOS	- 4	45 ns	- 20 200 ns
	- 5	55 ns	- 25 250 ns
	- 7	70 ns	- 30 300 ns
	- 10	100 ns	- 35 350 ns
	- 12	120 ns	- 45 450 ns
	- 15	150 ns	
	- 17	170 ns	


DJ Plastic SOJ Package	
FM Plastic Chip Carrier	L 0°C to 70°C
FP Plastic Chip Carrier	
J Cerpak/Cerdip	
JD Side Braze	
N Plastic DIP	
SD Zig-Zag-in-line	

TI 256K single-in-line package nomenclature

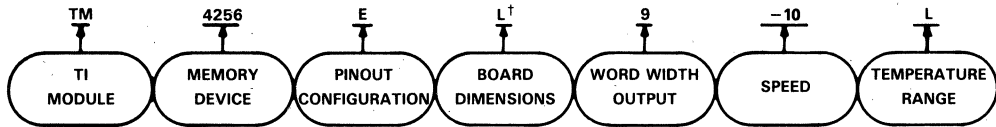

Max Access	L 0°C to 70°C
- 10	100 ns
- 12	120 ns
- 15	150 ns

TI 1Meg single-in-line package nomenclature

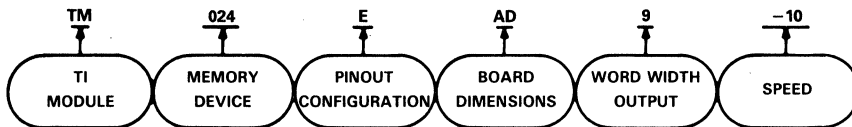

Max Access
- 10 100 ns
- 12 120 ns
- 15 150 ns

† The board dimensions for the various single-in-line package designators are given on pages 11-16 thru 11-23 of the 1986 MOS Memory Data Book (SMYD006).


## BIPOLAR MEMORY

### First-In First-Out Memories (FIFOs)

DESCRIPTION	TYPE OF OUTPUT	TYPE	TECHNOLOGY							PACKAGES	DOCUMENT
			STD TTL	ALS	AS	LS	S	HC	HCT		
16 Words × 4 Bits	3-State	'222				•				J,N	SDVD001
		'224				•					
		'232		A						D,N,FK,FN	
	OC	'227				•				J,N	
		'228				•					
16 Words × 5 Bits	3-State	'225					•			J,N	SDV001
		'229		A						DW,FK,FN	
		'234		•						DW,J,FK,FN	SDAS106
		'233		A						DW,FK,FN,J,N	SDVD001
64 Words × 4 Bits	3-State	'236		•					DW,J,FK,FN	SDAS107	
64 Words × 5 Bits	3-STATE	'235		•					DW,FN,FK,N	SDAS108	



Factory orders for circuits described in this guide should include a four-part type number as explained in the following example.



**MUST CONTAIN TWO TO FOUR LETTERS**

SN Standard Prefix

**2. Unique Circuit Description**

**MUST CONTAIN FOUR TO TWELVE CHARACTERS**

Examples:

- 5430 74AS02
- 74LS02 54HC4078A
- 54S02 74HCT241
- 54ALS29864

**3. Package**

**MUST CONTAIN ONE OR TWO LETTERS**

- J, JD, JT, JW, N, NT, NW, P, W (Dual-in-line packages)†
  - FE, FK, FN (Chip carriers)
  - D, DW, (Small outline packages)†
- (from pin-connection diagram on individual data sheet)

**4. Instructions (Dash No.)**

**MUST CONTAIN TWO NUMBERS**

- 00 No Special instructions
- 10 Solder-dipped leads (N and NT packages only)
- T Tape and Reel (D and DW packages only)

† These circuits in dual-in-line and small outline packages are shipped in one of the carriers shown below. Unless a specific method of shipment is specified by the customer (with possible additional costs), circuits will be shipped in the most practical carrier. Please contact your TI sales representative for the method that will best suit your particular needs.

Memory Products

**10**

- Dual-in-line (J, JD, JT, JW, N, NT, NW, P, W)
- Small outline (D, DW)
- Chip Carrier (FK, FN)

- Slide Magazines
- A-Channel Plastic Tubing
- Barnes Carrier (N only)
- Sectioned Cardboard Box
- Individual Plastic Box
- Tape and Reel (D and DW packages only)

---

# GENERAL INFORMATION

Packages offered by Texas Instruments are designed to meet the most efficient and cost effective method of meeting customer requirements and today's high-density packaging needs.

During the last decade, TI has produced one of the largest IC socket families. TI's sockets include every type and size socket in common use today and are available in a wide choice of contact materials and designs.

As a major manufacturer of surface mount components, TI is committed to help customers make the transition to surface mount as easy and economical as possible.

<b>Contents</b>	<b>Page</b>
Mechanical Data .....	11-2
Package Descriptions .....	11-2
IC Sockets .....	11-13
Surface Mount Technology .....	11-25


---

## MECHANICAL DATA

### Package Descriptions

#### D Plastic 'Small Outline' Package


This 'small outline' package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly. The D package comes in 8, 14, and 16-pin configurations.



16-pin D package shown

#### DW Plastic 'Small Outline' Package

This 'small outline' package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly. The DW package comes in 16, 20, 24 and 28-pin configurations.




20-pin DW package shown

---

### FD and FK Leadless Ceramic Chip Carrier Packages

Each of these hermetically sealed chip carrier packages has a three-layer ceramic base with a metal lid and braze seal. The packages are intended for surface mounting on solder lands on 1,27 (0.050-inch) centers. Terminals require no additional cleaning or processing when used in soldered assembly.

FK package terminal assignments conform to JEDEC standards 1, 2, and 11. The FD designation denotes non-JEDEC defined terminal assignments. Both FD and FK packages come in 20, 28, 44, 52, 68, and 84-terminal configurations.




**20-pin FD/FK package shown**

### FE, FG, and FV Leadless Ceramic Chip Carrier Packages

These rectangular leadless ceramic chip carriers are used for memory products. The FG and FV packages conform to JEDEC standards. The FE designation denotes non-JEDEC defined terminal assignments.

The FE package comes in 28 and 32-terminal configurations. The FG and FV packages comes in 18-terminal configurations.



**28-pin FE package shown**



**18-pin FG package shown**




**18-pin FV package shown**

---

### FJ Leaded Ceramic Chip Carrier Package

This square 'J' formed ceramic leaded chip carrier is used for microprocessor, display driver, and ASIC product families. The package consist of a 3-layer alumina ceramic case, a metal lid (gold-plated kovar), and gold-tin-braze-attached lead frame. Hermetic sealing is accomplished with a gold-tin-solder braze. The lead material is Alloy 42 base with nickel followed by gold plating. The final lead finish is gold plate or tin-lead solder dip. The package is designed for direct PC board mounting by reflow soldering or socket mounting.

The FJ package is available in 44 and 68-pin configurations.

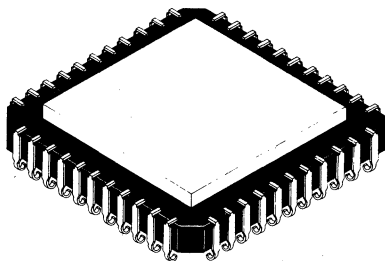


**44-pin FJ package shown**

### FN Plastic Chip Carrier Package

Each of these chip carrier packages consists of a circuit mounted on a lead frame and encapsulated within an electrically nonconductive plastic compound. The compound withstands soldering temperature with no deformation, and circuit performance characteristics remain stable when the devices are operated in high-humidity conditions. The packages are intended for surface mounting. Leads require no additional cleaning or processing when used in soldered assembly.

The FN package is available in 20, 28, 44, 68, and 84-terminal configurations.




**28-pin FN package shown**

---

## FT Plastic Flatpack

This plastic flat package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.




**48-lead FT package shown**

## GB Pin-Grid-Array Ceramic Package

This is a hermetically sealed ceramic multilayer plug-in package, with metal cap and gold-plated pins, and selected leads especially designed for low resistance and low inductance. The package is used for microprocessor and memory product families, and for military logic array designs that require a high I/O count.

The GB package is available in 68, 84, 100, 108, 132, 144, 180, and 208-pin configurations.




**68-pin GB package shown**

---

## HA Package


The 68-pin HA package is housed in a quadriform ceramic chip carrier (CERQUAD) and has gull-wing bent leads for surface-mount technology.

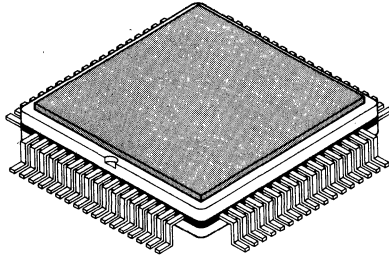

**68-pin HA package shown**

## HB Package

The 68-pin HB package is housed in a quadriform ceramic chip carrier (CERQUAD) and has straight leads for surface-mount technology. The straight leads are for use with low-profile sockets.

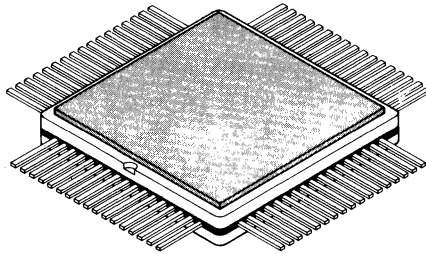

**68-pin HB package shown**


---

## J, JT, and JW Packages


These hermetically sealed dual-in-line packages consist of a ceramic base, ceramic cap, and a lead frame. Hermetic sealing is accomplished with glass. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Tin-plated (bright-dipped) leads require no additional cleaning or processing when used in soldered assembly.

For all except 24-pin packages, the letter J is used by itself since only the 24-pin package is available in more than one row-spacing. For the 24-pin package, the 7,62 (0.300) version is designated JT; the 15,24 (0.600) version is designated JW. If no second letter or row spacing is specified, the package is assumed to have 15,24 (0.600) row-spacing.


The J package comes in 14, 16, 18, 20, 24, and 28-pin configurations.



14-pin J package shown



24-pin JT package shown




24-pin JW package shown

## JD Package

This hermetically sealed ceramic dual-in-line package consists of a metal cap and gold plated side-brazed leads.


The JD package is available in 16, 18, 20, 22, 24, 28, 40, 48, 52, and 64-pin configurations.



22-pin JD package shown

## JG Dual-In-Line Package

This hermetically sealed dual-in-line package consists of a ceramic base, ceramic cap, and 8-pin lead frame. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Tin-plated or tin-lead-solder-dipped leads require no additional cleaning or processing when used in soldered assembly.



8-pin JG package shown




---

### KC Package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated under high humidity conditions.

The KC package is available in a 5-lead configuration only.




**5-pin KC package shown**

### KH Package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated under high humidity conditions.


The KH package is available in a 5-lead configuration only.



**5-pin KH package shown**

### KJ Metal Can Package

This hermetically sealed package consists of a base and can nickel-plated steel. The leads are nickel-plated Alloy 52 with solder-dip finish.




**KJ package shown**

---

## KV Package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated under high humidity conditions.

The KV package is available in 5 and 15-lead configurations.



**15-pin KV package shown**

## L and LD Plug-In Packages

These hermetically sealed plug-in packages consist of a welded metal base and cap with individual leads secured by an insulating glass sealant. The gold-plated leads require no additional cleaning or processing when used in soldered assembly.

The L package is available in 8- and 15-pin configurations.



**8-pin L package shown**



**3-pin LD package shown**

## LP and LU Plastic Packages

These packages consist of a circuit mounted on a lead frame and encapsulated with a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics remain stable when operated in high-humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.



**3-pin LP package shown**




**3-pin LU package shown**

## N, NT, and NW Packages


Each of these plastic dual-in-line packages consists of a circuit mounted on a lead frame and encapsulated within an electrically nonconductive plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated under high-humidity conditions. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Leads require no additional cleaning or processing when used in soldered assemblies.

For all except 24-pin packages, the letter N is used by itself since only the 24-pin package is available in more than one row-spacing. For the 24-pin package, the 7,62 (0.300) version is designated NT; the 15,24 (0.600) version is designated NW. If no second letter or row spacing is specified, the package is assumed to have 15,24 (0.600) row-spacing.


The N package comes in 14, 16, 18, 20, 22, 24, 28, 40, 48, 52, and 64-pin configurations.



16-pin N package shown



24-pin NT package shown




24-pin NW package shown

## NE Package

This dual-in-line package consists of a circuit mounted on a lead frame and encapsulated within an electrically nonconductive plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. For better heat dissipation there are internal tabs connecting the two central leads on each side of the package. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Leads require no additional cleaning or processing when used in soldered assembly.

The NE package is available in 14 and 16-pin configurations.




16-pin NE package shown

---

## NF Package


This dual-in-line package consists of a circuit mounted on a 28-pin lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Solder-plated leads require no additional cleaning or processing when used in soldered assembly.



**28-pin NF package shown**

## P Package


This dual-in-line package consists of a circuit mounted on an 8-pin lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high-humidity conditions. Once the leads are compressed and inserted, sufficient tension is provided to secure the package in the board during soldering. Solder-plated leads require no additional cleaning or processing when used in soldered assembly.



**8-pin P package shown**

## U Package

This flat package consists of a ceramic base, ceramic cap, and an 10-pin lead frame. Circuit bars are alloy mounted. Hermetic sealing is accomplished with glass. Leads require no additional cleaning or processing when used in soldered assembly.




**10-lead U package shown**

---

## W Package

This hermetically sealed flat package consists of an electrically nonconductive ceramic base and cap and a lead frame. Hermetic sealing is accomplished with glass. Tin-plated or tin-lead-solder-dipped leads require no additional cleaning or processing when used in soldered assembly.


The W package is available in 14-, 16-, 20-, and 24-pin configurations.



**24-pin W package shown**

## WA Package


This hermetically sealed 14-pin flat package consists of an electrically nonconductive ceramic base and cap. It is a smaller version of the 14-pin W flatpack. Hermetic sealing is accomplished with glass. Tin-plated or tin-lead-solder-dipped leads require no additional cleaning or processing when used in soldered assembly.



**14-pin WA package shown**

## WC Package

This hermetically sealed 24-pin flat package consists of an electrically nonconductive ceramic base and cap. It is a smaller version of the 24-pin W flatpack. Hermetic sealing is accomplished with glass. Tin-plated or tin-lead-solder-dipped leads require no additional cleaning or processing when used in soldered assembly.



**24-pin WC package shown**

## IC SOCKETS

### INTRODUCTION

Texas Instruments has developed solutions for today's high density packaging needs. The TI facility at Attleboro, Massachusetts (one of the world's largest suppliers of multimetal systems) provides leading-edge technology which, combined with reliable, high-volume, off-the-shelf interconnection products, allows TI to quickly meet volume commercial applications.

During the last decade, TI has produced one of the largest IC socket families. TI's sockets include every type and size socket in common use today and are available in a wide choice of contact materials and designs.

Our sockets are designed for:

- easy and efficient hand assembly
- compatibility with automatic assembly equipment
- maximum performance and board density

This section provides information on the following types of IC socket products.

#### PRODUCTION SOCKETS

Plastic Leaded Chip Carrier  
 Single-in-Line Packages  
 Pin-Grid Arrays  
 Dual In-Line  
 Dual In-Line 0.070-inch spacing  
 Quad In-Line

#### TYPE

PLCC  
 SIP  
 PGA  
 DIP  
 Shrink Pack  
 QUIP

#### BURN-IN/TEST SOCKETS

Plastic Leaded Chip Carrier  
 Pin Grid Array  
 Small Outline  
 Dual In-Line  
 Dual In-Line 0.070-inch spacing  
 Small Outline  
 Quad

#### TYPE

PLCC  
 PGA  
 J Lead  
 DIP  
 Shrink Pack  
 Flat Pack  
 Flat Pack

Specially formulated alloys give the TI contact springs:

- Low Contact Resistance
- High Contact Strength (to stand up to repetitive insertions and withdrawals)
- High normal forces assure gas-tight reliability

A full line of reliable, readily available, low-cost interconnection systems means premium performance at an economical price.

Additional information on these and other TI products, including pricing and delivery quotations, may be obtained from your nearest authorized TI Distributor, TI Sales Representative or:

Texas Instruments Incorporated  
 Connector Systems Department, MS 14-3  
 Attleboro, Massachusetts 02703

Telephone: (617) 699-5242/5375  
 TELEX: 92-7708



# IC SOCKETS

## PLASTIC LEADED CHIP CARRIER

### PERFORMANCE SPECIFICATIONS

#### Mechanical

Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hole size range: 0.032 in to 0.042 in  
 Vibration: 15 G max  
 Shock: 100 G max  
 Insertion force: 0.59 lbs per position typ  
 Withdrawal force: 0.25 lbs per position typ  
 Normal force: 200 g min, 450 g typ  
 Wipe: 0.075 in min  
 Durability: 5 cycles min  
 Contact retention: 1.5 lbs min

#### Electrical

Current carrying capacity: 1 A per contact  
 Insulation resistance: 5000 MΩ min  
 Dielectric withstanding voltage: 1000 V ac rms min  
 Capacitance: 1 pF max


#### Environmental

Operating temperature:  
 Operating: -40°C to 85°C  
 Storage: -40°C to 95°C  
 Temperature cycling with humidity: will conform to final EIA specifications


#### MATERIALS

Body — Rytton R-4 (40% glass) UL 94 V-0 rating  
 Contacts — CDA 510 spring temper  
 Contact finish — 90/10 tin/lead (200 μin - 400 μin) over 40 μin copper


Extraction tool available, consult factory  
 Contact factory for detailed information

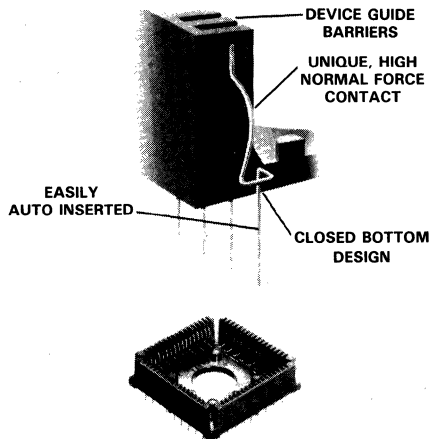

### PART NUMBER SYSTEM


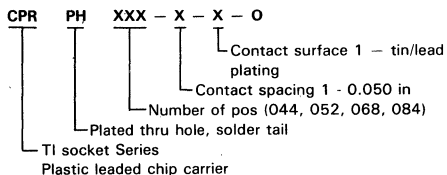


### PLASTIC LEADED CHIP CARRIER CPR SERIES



68-Pin shown

NOTE: Socket electrical pin-out pattern represents component side of P.C.B. layout. (TYP. counter clockwise numbering pin-out system.)



Pos	A	B	C
44	21,43 (0.844)	17,78 (0.700)	12,70 (0.500)
52	23,98 (0.944)	20,32 (0.800)	15,24 (0.600)
68	29,06 (1.144)	25,40 (1.000)	20,32 (0.800)
84	34,14 (1.344)	30,48 (1.200)	25,40 (1.000)

Dimensions in parentheses are in inches

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



## PRODUCT FEATURES

- Can be loaded by top actuated insertion or press-in insertion, either manually or automatically
- High reliability due to high pressure contact point
- Open body and high stand-off design provide high efficiency in heat dissipation
- High durability up to 10,000 cycles
- Compact design

## PERFORMANCE SPECIFICATIONS

### Mechanical

- Accommodates IC leads per specific IC device
- Recommended PCB thickness range: 0.062 in to 0.092 in
- Recommended PCB hole size range: 0.032 in to 0.042 in
- Durability: 10,000 cycles 10 mΩ max contact resistance change

- Insertion force: Zero g
- Withdrawal force: Zero g†

### Electrical

- Contact rating: 1 A per contact
- Contact resistance: 20 mΩ max initial
- Insulation resistance: 1000 MΩ per MIL-STD 202, Method 302, Condition B
- Dielectric withstanding voltage: 500 V ac rms per MIL-STD 202, Method 301


### Environmental

- Thermal shock: 100 cycles, -25°C to +150°C
- Temperature soak: 150°C for 48 hours
- Operating temperature: -40°C to +150°C


### MATERIALS

- Body — ULTEM glass filled (UL 94 V-0)
- Contact — copper alloy
- Plating‡ — overall gold plate 4 μin over min 70 μin nickel plating


- †After IC is unlocked from the socket
- ‡For additional plating options contact factory
- For complete test report contact the factory




## PART NUMBER SYSTEM

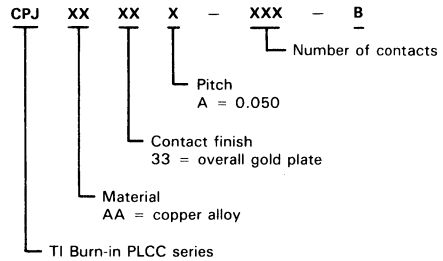


## 18 PIN FOOTPRINT SHOWN

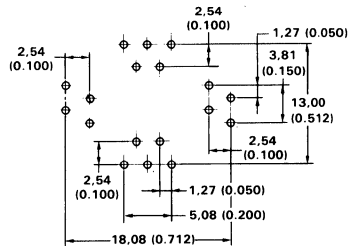

SIZES: 18 PIN  
22 PIN

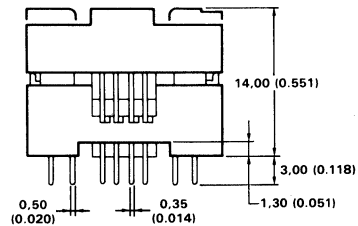

## PLCC BURN-IN/TEST SOCKETS CPJ SERIES

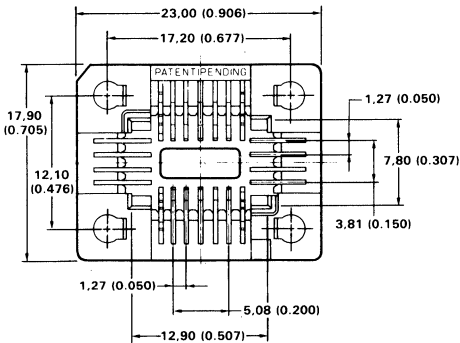

Dimensions in parentheses are inches  
Contact factory for detailed information

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703



# IC SOCKETS

## SINGLE-IN-LINE PACKAGE SOCKETS

### PERFORMANCE SPECIFICATIONS†

#### Mechanical

Vibration: MIL-STD-202  
 Durability: 30 cycles  
 Insertion force: Zero g  
 Withdrawal force: Zero g<sup>‡</sup>  
 Contact (normal) force: 200 g min  
 Contact retention force: 2 lbs per circuit min

#### Electrical

Contact rating: 1 A  
 Contact resistance: 30 mΩ max initial  
 Insulation resistance: 1000 MΩ at 500 dc  
 Dielectric strength: 1500 V ac rms  
 Capacitance: 2 pF max

† Values may vary due to test sequence and SIP module configuration

‡ After module is unlocked from the receptacle  
 For a complete test report, please contact factory

#### Environmental


(20 mΩ max contact resistance change after all tests)  
 Operating and storage temperature: -40°C to 100°C  
 Humidity: MIL-STD 202, Method 106D, 10 days  
 Temperature soak: 85°C for 160 hours  
 Thermal Shock: 5 cycles, -40°C to 85°C per MIL-STD 202, Method 107E

#### MATERIALS


Body — PES polyether sulfone, glass filled, UL 94 V-0  
 Contact — Beryllium copper C17000; phosphor bronze alloy CA510

Contact finishes — Post plate min 200 μin tin/lead over min 50 μin nickel overall  
 Post plate min 30 μin hard gold over min 75 μin nickel overall


For additional plating options contact the factory.

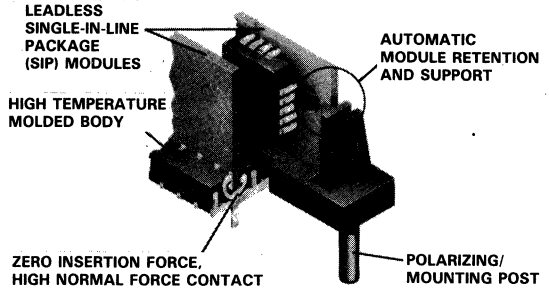


### PART NUMBER SYSTEM

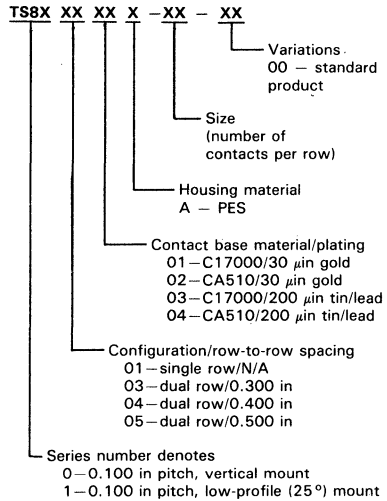

### DUAL ROW VERTICAL

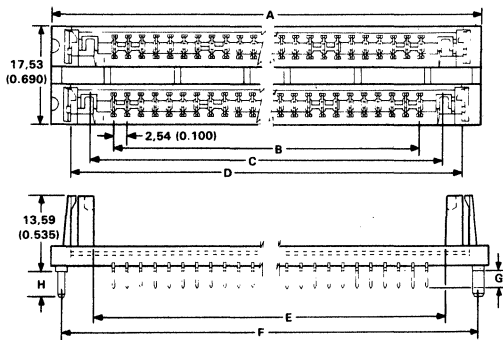

### SINGLE ROW LOW PROFILE



Ckt. Size	A	B	C	D	E	F	G	H
30	96.52 (3.800)	73.66 (2.900)	82.14 (3.234)	89.28 (3.515)	80.52 (3.170)	92.71 (3.650)	2.79 (0.110)	3.86 (0.152)

Contact factory for detailed information

Dimensions in parentheses are in inches

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703

# IC SOCKETS HIGH DENSITY PIN GRID ARRAY

## PERFORMANCE SPECIFICATIONS

### Mechanical

Accommodates IC leads 0.015 in to 0.021 in diameter  
 Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hole size range: 0.032 in to 0.042 in  
 Recommended hole grid pattern: 0.100 in  $\pm$  0.002 in each direction

Vibration: 15 G, 10-2000 Hz per MIL-STD 1344A, Method 2005.1 Test Condition III

Shock: 100 G, sawtooth waveform, 2 shocks each direction per MIL-STD 202, Method 213, Test Condition I

Durability: 5 cycles, 10 m $\Omega$  max contact resistance change per MIL-STD 1344, Method 2016

Insertion force: 3.6 oz (102 g) per pin typ using 0.018 in diameter test pin

Withdrawal force: 0.5 oz (14 g) per pin min using 0.018 in diameter test pin

### Electrical

Contact rating: 1 A per contact

Contact resistance: 20 m $\Omega$  max initial

Insulation resistance: 1000 M $\Omega$  at 500 V dc per MIL-STD 1344, Method 3003.1

Dielectric withstanding voltage: 1000 V ac rms per MIL-STD 1344, Method 3001.1

Capacitance: 1 pF max per MIL-STD 202, Method 305

### Environmental

Operating temperature: -65°C to 125°C, gold; -40°C to 100°C, tin/lead

Corrosive atmosphere: 10 m $\Omega$  max contact resistance change when exposed to 22% ammonium sulfide for 4 hours

Gas tight: 10 m $\Omega$  max contact resistance change when exposed to nitric acid vapor for 1 hour

Temperature soak: 10 m $\Omega$  max contact resistance change when exposed to 105°C temperature for 48 hours

### MATERIALS


Body - PBT polyester UL 94 V-0

On request, G10/FR4 or Mylar film

Outer sleeve - Machined Brass (QQ-B-626)

Inner contact - Beryllium copper (QQ-C-530) heat treated


Plating: (specified by part number)

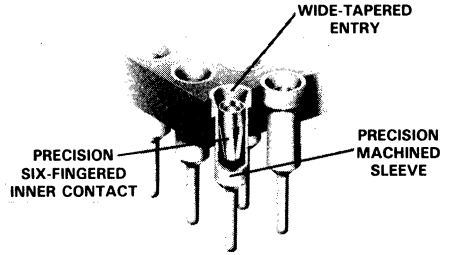


Inner contact - 30  $\mu$ m gold over 50  $\mu$ m nickel or 100  $\mu$ m tin/lead over 50  $\mu$ m nickel

Outer sleeve - 10  $\mu$ m gold over 50  $\mu$ m nickel or 50  $\mu$ m tin/lead over 50  $\mu$ m nickel

## PART NUMBER SYSTEM

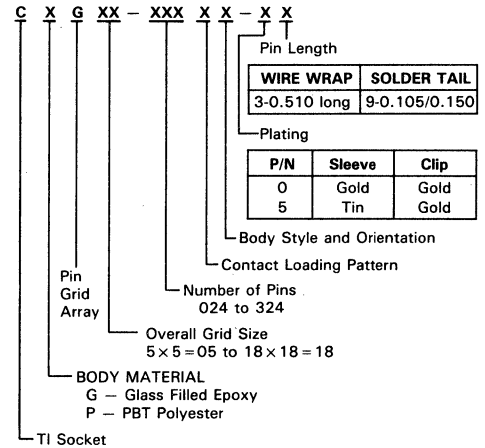

## PIN GRID ARRAY

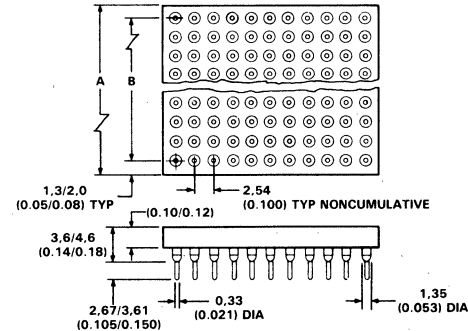

Insulator Size	A $\pm 0.010$	B $\pm 0.005^\dagger$
9 x 9	(0.950) 24,13	(0.800) 20,32
10 x 10	(1.050) 26,67	(0.900) 22,86
11 x 11	(1.150) 29,21	(1.000) 25,40
12 x 12	(1.250) 31,75	(1.100) 27,94
13 x 13	(1.350) 34,29	(1.200) 30,48
14 x 14	(1.450) 36,83	(1.300) 33,02
15 x 15	(1.550) 39,37	(1.400) 35,56
16 x 16	(1.650) 41,91	(1.500) 38,10
17 x 17	(1.750) 44,45	(1.600) 40,64
18 x 18	(1.850) 46,99	(1.700) 43,18

<sup>†</sup>Noncumulative  
 Dimensions in parentheses are inches  
 Consult factory for detailed information

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

34 Forest Street • Attleboro, Massachusetts 02703

# IC SOCKETS SOJ BURN-IN/TEST

## PERFORMANCE SPECIFICATIONS

### Mechanical

Accommodates IC leads per specific IC device  
 Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hole size range: 0.032 in to 0.042 in  
 Durability: 10,000 cycles, 20 mΩ max contact resistance change

Insertion force: 1.3 oz per position max  
 Withdrawal force: 8.8 grams per position min

### Electrical


Contact rating: 1.0 A per contact  
 Contact resistance: 20 mΩ max initial  
 Insulation resistance: 1000 MΩ per MIL-STD 202, Method 302, Condition B  
 Dielectric withstanding voltage: 700 V ac rms per MIL-STD 202, Method 301

### Environmental



Thermal shock: 100 cycles, -25°C to +180°C, 1 hour  
 Temperature soak: 180°C for 1000 hours, 80 mΩ max change  
 Operating temperature: -65°C to +180°C

### MATERIALS


Body — PES glass filled UL 94 V-0  
 Contact — copper alloy  
 Plating — overall gold plate min 4 μin over min 70 μin nickel plating

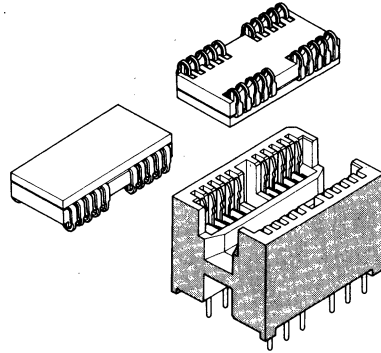

## PART NUMBER SYSTEM

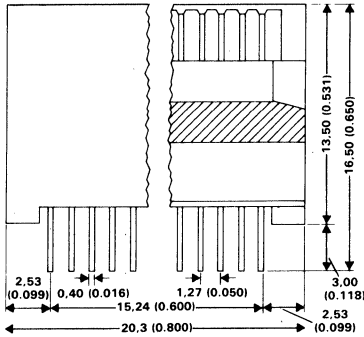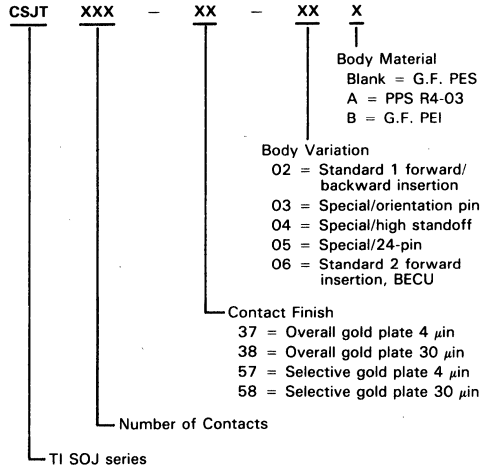


02 VERSION SHOWN



Dimensions in parentheses are inches  
 Contact factory for detailed information

SIZES: 20 pin  
 26 pin

## 20-PIN (02 VERSION) FOOTPRINT SHOWN

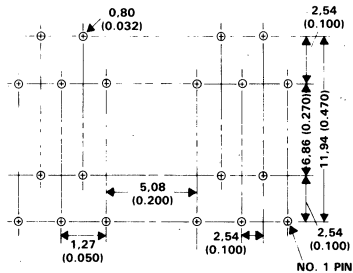

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703

## PERFORMANCE SPECIFICATIONS

### Mechanical

Accommodates IC leads  $0.011 \pm 0.003$  in by  $0.018 \pm 0.003$   
 Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hole size range: 0.032 in to 0.042 in  
 Recommended hole grid pattern: 0.100 in  $\pm$  0.003 in each direction  
 Vibration: 15 G, 10-2000 Hz per MIL-STD 1344A, Method 2005.1 Test Condition III.  
 Shock: 100 G, sawtooth waveform, 2 shocks each direction per MIL-STD 202, Method 213, Test Condition I  
 Durability: 5 cycles, 10 m $\Omega$  max contact resistance change per MIL-STD 1344, Method 2016  
 Insertion force (C7X and C86): 16 oz (454 g) per pin max  
 Withdrawal force: (40 g) per pin min

### Electrical

Contact rating: 1 A per contact  
 Contact resistance: 20 m $\Omega$  max initial  
 Insulation resistance: 1000 M $\Omega$  at 500 V dc per MIL-STD 1344, Method 3003  
 Dielectric withstanding voltage: 1000 V ac rms per MIL-STD 1344, Method 3001.1  
 Capacitance: 1 pF max per MIL-STD 202, Method 305


### Environmental

Operating temperature: -55°C to 125°C, gold; -40°C to 100°C, tin  
 Corrosive atmosphere: 10 m $\Omega$  max contact resistance change when exposed to 22% ammonium sulfide for 4 hours  
 Gas tight: 10 m $\Omega$  max contact resistance change when exposed to nitric acid vapor for 1 hour  
 Temperature soak: 10 m $\Omega$  max contact resistance change when exposed to 105°C temperature for 48 hours

### Materials (C7X and C86)


Body - PBT polyester UL 94 V-0  
 C7X Contacts - Outer sleeve: brass  
 Clip: BECU  
 Contact finish - clip 30  $\mu$ m gold over 50  $\mu$ m nickel or 50  $\mu$ m tin/lead over 50  $\mu$ m nickel  
 Specified by sleeve 10  $\mu$ m gold over 50  $\mu$ m nickel or 50  $\mu$ m tin/lead over 50  $\mu$ m nickel  
 Part Number  
 C86 Contacts - Phosphor bronze base metal  
 C86 Contact-finish - Tin plate 200  $\mu$ m over copper flash

## C7X SERIES - SCREW MACHINE

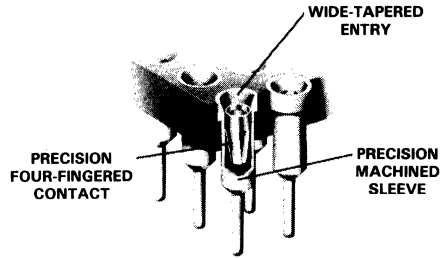


## C7X SERIES - SCREW MACHINE

### PART NUMBER SYSTEM

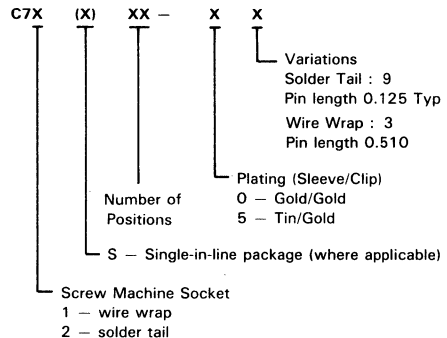


## C86 SERIES - STAMPED AND FORMED

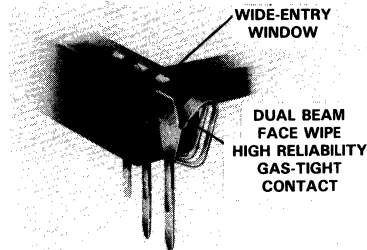

## C86 SERIES

### PART NUMBER SYSTEM

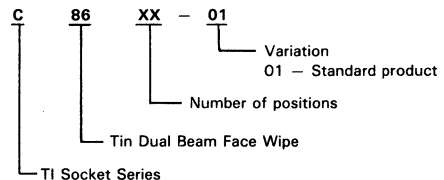


PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


34 Forest Street • Attleboro, Massachusetts 02703

# IC SOCKETS DUAL-IN-LINE (Continued)


## DUAL-IN-LINE C7X AND C86 SERIES

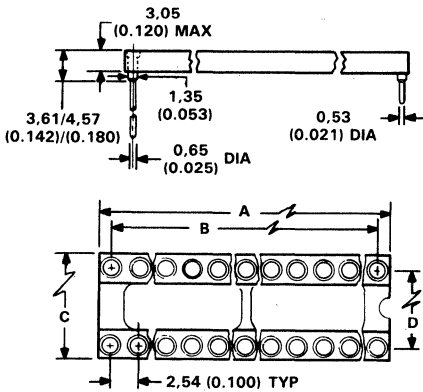

## C7X SERIES

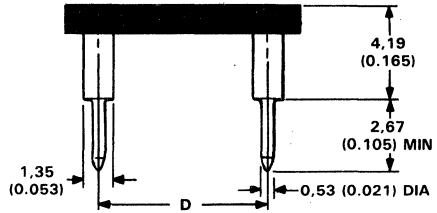

## C86 SERIES

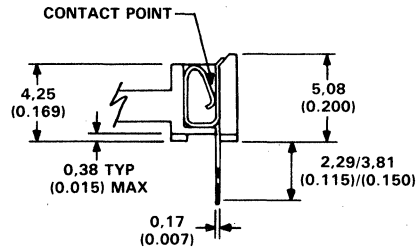

## DIPS

Positions	Dim A Max	Dim B ± 0.005	Dim C Max	Dim D ± 0.005	Positions	Dim A Max	Dim B ± 0.005	Dim C Max	Dim D ± 0.005
6	7.62 (0.300)	5.08 (0.200)	10.16 (0.400)	7.62 (0.300)	†24	30.48 (1.200)	27.94 (1.100)	12.76 (0.500)	10.16 (0.400)
8	10.16 (0.400)	7.62 (0.300)	10.16 (0.400)	7.62 (0.300)	28	35.56 (1.400)	33.02 (1.300)	17.78 (0.700)	15.24 (0.600)
14	17.78 (0.700)	15.24 (0.600)	10.16 (0.400)	7.62 (0.300)	32	40.64 (1.600)	38.10 (1.500)	17.78 (0.700)	15.24 (0.600)
16	20.32 (0.800)	17.78 (0.700)	10.16 (0.400)	7.62 (0.300)	34	45.72 (1.800)	43.18 (1.700)	17.78 (0.700)	15.24 (0.600)
18	22.86 (0.900)	20.32 (0.800)	10.16 (0.400)	7.62 (0.300)	40	50.80 (2.000)	48.26 (1.900)	17.78 (0.700)	15.24 (0.600)
20	25.40 (1.000)	22.86 (0.900)	10.16 (0.400)	7.62 (0.300)	48	60.96 (2.400)	58.42 (2.300)	17.78 (0.700)	15.24 (0.600)
22	27.94 (1.100)	25.40 (1.000)	12.76 (0.500)	10.16 (0.400)	50	63.50 (2.500)	60.96 (2.400)	25.40 (1.000)	7.62 (0.300)
24	30.48 (1.200)	27.94 (1.100)	17.78 (0.700)	15.24 (0.600)	64	81.28 (3.200)	78.74 (3.100)	25.40 (1.000)	22.86 (0.900)
†24	30.48 (1.200)	27.94 (1.100)	10.16 (0.400)	7.62 (0.300)					

†Nonstandard sizes

Not all sizes available in each series

Dimensions apply to all series

Dimensions in parentheses are inches  
Contact factory for detailed information

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703

## PERFORMANCE SPECIFICATIONS

### Mechanical

Accommodates IC leads 0.011 in by 0.018 in  
 Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hold size range: 0.032 in to 0.042 in  
 Durability: 10K cycles – CM Series, 5K cycles – CP/CQ

### Electrical

Contact rating: 1 A per contact  
 Contact resistance: 20 mΩ max initial  
 Insulation resistance: 1000 MΩ at 500 V dc  
 Dielectric withstanding voltage: 1000 V ac rms  
 Capacitance: 1 pF max per MIL-STD 202, Method 305

### Environmental


Operating temperature: –65°C to 170°C – CP/CM Series,  
 –65°C to 150°C – CQ Series  
 Humidity: 10 mΩ max contact resistance  
 Temperature Soak: 10 mΩ max contact resistance change

### MATERIALS


Body – PPS (polyphenylen sulfide) UL 94 V-0  
 Contacts – Higher performance copper nickel alloy  
 Plating: † 4 μin of gold min over 100 μin of nickel min

†For additional plating options consult the factory

## PART NUMBER SYSTEM

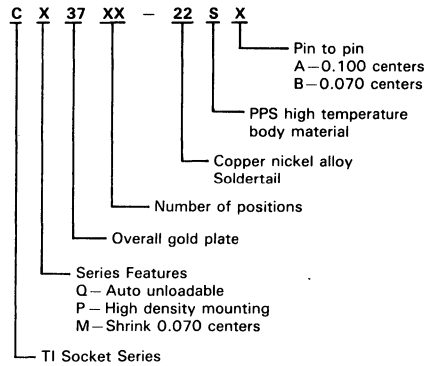


## BURN-IN/TEST DIP SOCKETS

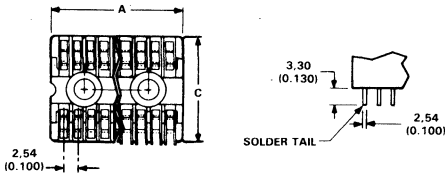


### CQ37 SERIES

Number of Positions	A ±0.01 Length	D ±0.02	C ±0.01 Width	B ±0.01 Contact
14	20,32 (0.800)			
16	22,35 (0.880)	12,70 (0.500)	15,24 (0.600)	7,62 (0.300)
18	24,89 (0.980)			
20	27,43 (1.080)			
24	32,51 (1.280)			
28	37,59 (1.480)	19,05 (0.750)	22,86 (0.900)	15,24 (0.600)
40	52,83 (2.080)			
42	55,37 (2.180)			

### CQ37 SERIES




### CP37 SERIES



### CP37 SERIES

Number of Positions	A max Length	B ±0.02	C max Width
8	11,68 (0.460)		
14	17,78 (0.700)	7,62 (0.300)	12,70 (0.500)
16	20,32 (0.800)		
18	22,86 (0.900)		
20	25,40 (1.000)		
24	30,48 (1.200)	15,24 (0.600)	20,32 (0.800)
28	35,56 (1.400)		
40	50,80 (2.000)		

### CM37 SERIES

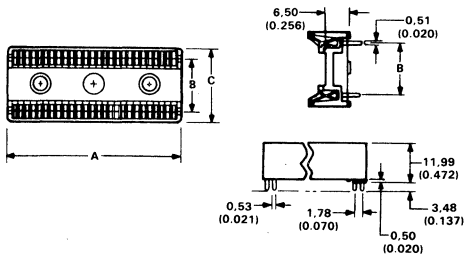

### CM37 SERIES

Number of Positions	A ±0.016 Length	B ±0.02	C ±0.016 Width
28	27,18 (1.070)	10,67 (0.420)	17,20 (0.677)
40	37,85 (1.490)		
42	39,62 (1.560)	16,51 (0.650)	23,11 (0.910)
54	50,29 (1.980)		
64	59,18 (2.330)	20,32 (0.800)	26,92 (1.060)

Dimensions in parentheses are inches  
 Contact factory for detailed information

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703


# IC SOCKETS QUAD-IN-LINE/SHRINK PACK

## PERFORMANCE SPECIFICATIONS


Insertion force: 16 oz (454 g) per pin max  
 Withdrawal force: 1.5 oz (42 g) per pin min  
 Operating temperature: -40°C to 100°C, tin/lead  
 Accommodates IC leads 0.011 ± 0.0003 in by  
 0.018 ± 0.003 in  
 Contact rating: 1 A per contact

## MATERIALS

Body — PBT polyester UL 94 V-0  
 C4S & CxW Contacts — Copper alloy  
 Contact finish — Reflow tin plating, 40 μm min

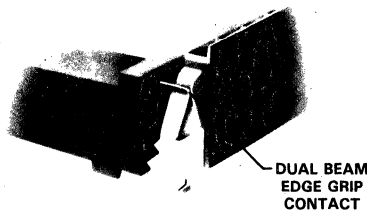

## PART NUMBER SYSTEM FOR CxW SERIES

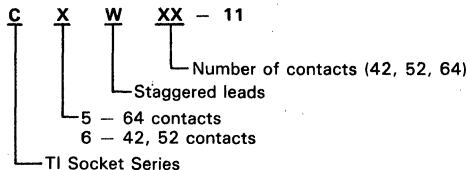


## QUAD-IN-LINE (CxW SERIES)


Product Number	A Max Length	B Row to Row	C Max Row to Row
C5W64-11	41,90 (1.65)	22,90 (0.950)	19,05 (0.750)
C6W42-11	27,90 (1.10)	22,90 (0.900)	17,80 (0.700)
C6W52-11	34,30 (1.35)	22,90 (0.900)	17,80 (0.700)

Dimensions in parentheses are inches  
 Contact factory for detailed information


## PART NUMBER SYSTEM† FOR C4S SERIES

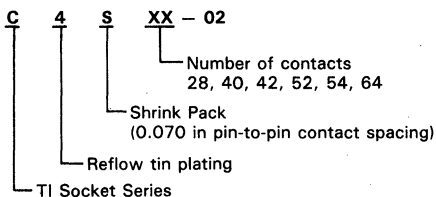

† Also available in screw machine contacts



## QUAD-IN-LINE (CxW SERIES)

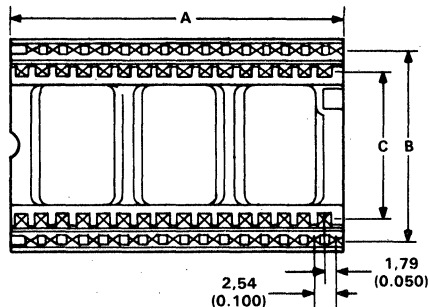


## C4S SERIES

Positions	A Max Length	B Row to Row	C Max Width
28	25,02 (0.985)	10,16 (0.400)	13,00 (0.512)
40	35,69 (1.405)	15,24 (0.600)	17,98 (0.708)
64	57,07 (2.247)	19,05 (0.750)	21,62 (0.851)

Dimensions in parentheses are inches

## SHRINK PACK DIP (C4S SERIES)

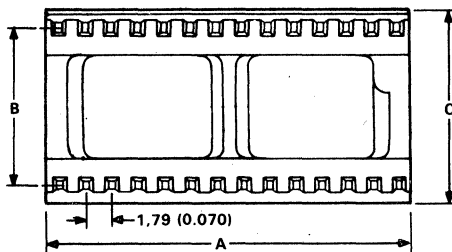

**PERFORMANCE SPECIFICATIONS**

**Mechanical**

Accommodates IC leads per specific IC device  
 Recommended PCB thickness range: 0.062 in to 0.092 in  
 Recommended PCB hole size range: 0.032 in to 0.042 in  
 Durability: 5000 cycles, 10 mΩ max contact resistance change per MIL-STD 1344, Method 2016

**Electrical**

Contact rating: 1 A per contact  
 Contact resistance: 20 mΩ max initial  
 Insulation resistance: 1 MΩ at 500 V dc per MIL-STD 1344, Method 3003.1  
 Dielectric withstanding voltage: 700 V ac rms per MIL-STD 1344, Method 3001.1  
 Capacitance: 1 pF max per MIL-STD 202, Method 305

**Environmental**


Operating temperature: -65°C to 170°C  
 Humidity: 10 mΩ max contact resistance change when tested per MIL-STD 202, Method 103B  
 Temperature soak: 10 mΩ max contact resistance change when exposed to 105°C temperature for 48 hours

**MATERIALS**


Body - CFP Series - PES (polyether sulfone) glass filled UL 94 V-0  
 Temperature: -65°C to 170°C  
 Contact - Beryllium copper  
 Plating:† Overall gold plate min 4 μin over min 70 μin nickel plating

†For additional plating option consult the factory.  
 Dimensional drawings available from factory.


**SMALL OUTLINE FLAT PACK (CFPH/K SERIES)**




**PART NUMBER SYSTEM**

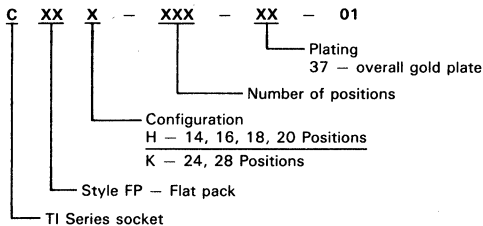


**QUAD FLAT PACK (CFPM SERIES)**




**PART NUMBER SYSTEM**

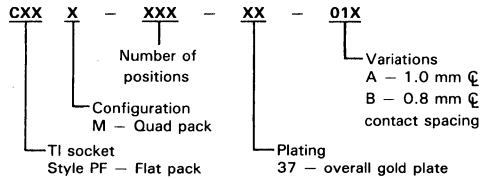

**PIN GRID ARRAY (CZFW SERIES)**



**PART NUMBER SYSTEM**

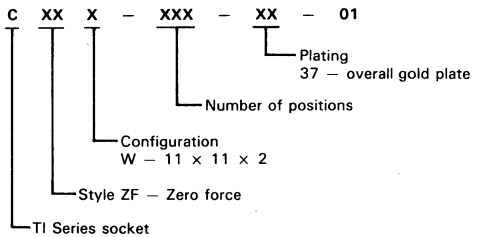

**AVAILABLE SIZES**

CFPH Series 14, 16, 18, 20	Small Outline Flat Pack
CFPK Series 24, 28	Flat Pack
CFPM Series 64, 80	Quad Flat Pack
CZFW Series 11 x 11 x 2	Pin Grid Array

Contact factory for detailed information

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



34 Forest Street • Attleboro, Massachusetts 02703



For more information contact your  
local distributor or contact TI directly:

Texas Instruments Incorporated  
CSD Marketing, MS 14-1  
Attleboro, MA 02703

(617) 699-5242/5269

**TI Distributors**

**TI AUTHORIZED DISTRIBUTORS  
IN USA**

Almac Electronics  
Aved Electronics  
Cypress Electronics  
DEE  
General Radio Supply Company  
Graham Electronics  
Hall-Mark Electronics  
Interface Electronics

Kierluff Electronics  
Marshall Electronics  
Milgray Electronics  
Newark Electronics  
Powell Electronics  
Summit Distributors  
Wyle Distribution Group

**TI AUTHORIZED DISTRIBUTORS  
IN CANADA**

Electro Sonic  
Future Electronics

**TI AUTHORIZED DISTRIBUTORS  
IN USA**

— Test and Burn-in Sockets Only —  
Victor Sales  
Waltham, Massachusetts 02254-9017  
(617) 893-7780

**Field Sales Offices**

**UNITED STATES**

**California**

Irvine 91714  
17891 Cartwright Road  
Phone: (714) 660-8111

San Diego 92123  
4333 View Ridge Ave., Suite B  
Phone: (619) 278-9600/9603

Torrence 90502  
9505 Hamilton St.  
Bldg. A, Suite One  
Phone: (213) 217-7000

**Georgia**

Norcross 30092  
5515 Spaulding Drive  
Phone: (404) 662-7861/7931

**Massachusetts**

Attleboro 02703  
34 Forest Street, MS 10-6/MS 14-3  
Phone: (617) 699-5206/1278/5213

**North Carolina**

Charlotte 28210  
8 Woodlawn Green  
Suite 100  
Phone: (704) 527-0930

**Texas**

Dallas 75265  
7800 Banner Drive, MS 3936  
Phone: (214) 995-7550/7547/7548

**INTERNATIONAL**

**Australia**

Texas Instruments Australia, Ltd.  
P.O. Box 63  
Elizabeth, South Australia 5112  
Phone: 61-8-255-2066

**England**

Texas Instruments, Ltd.  
Beffordia House  
Prebend Stsreet  
Bedford MK41 7PA  
Phone: (0234) 63211, Ext. 1

**France**

Texas Instruments, Ltd.  
Metallurgical Materials Division  
8-10 Avenue Morane Saulnier  
78140 Vellizy-Villacoublay, Paris  
Phone: 333. 946. 9712

**Hong Kong**

Texas Instruments Asia, Ltd.  
Asia Pacific Division  
8th Floor, World Shipping Centre  
Harbor City 7, Canton Road  
Kowloon, Hong Kong  
Phone: 852-3-722-1223

**Italy**

Texas Instruments Italia SPA  
Viale Europa, 40  
I-20093 Cologno Monzese  
Milano  
Phone: 011-39-2-25.300.1

**Japan**

Texas Instruments Japan, Ltd.  
305 Tanagasnira  
Oyama-Cho  
Suntoh-Gun, Shizuoka-Ken  
Japan 410-13  
Phone: (81) 550-81211

**Mexico**

Texas Instruments de Mexico, SA  
Av. Reforma No. 450-10 Piso  
Col. Juarez  
Delegacion: Cuauhtemoc  
Mexico City, D.F.  
Mexico 06600  
Phone: 52-5-514-3583

**Singapore**

Texas Instruments Asia  
#02-08, 12 Lorong Bakar Batu  
Kolam Ayer Industrial Estate  
Singapore 1334  
Republic of Singapore  
Phone: 65-747-2255

**Taiwan**

Texas Instruments Supply Co.  
Taiwan Branch  
Bank Tower  
Room 903, 205 Tun Hwa N. Road  
Taipei, Taiwan  
Phone: 886-2-713-9311

**West Germany**

Texas Instruments Deutschland GMBH  
Metallurgical Materials Div.  
Rosenkavallerplatz 15  
D-8000 Muenchen 81  
Phone: 011-49-89-915081

*Texas Instruments provides customer assistance in varied technical areas. Since TI does not possess full access to data concerning all of the uses and applications of customers' products, responsibility is assumed by TI neither for customer product design nor for any infringement of patents or rights of others, which may result from TI assistance.*

---

## SURFACE MOUNT TECHNOLOGY

One of the primary goals of today's solid-state equipment manufacturers is increased density – to pack more functions into a given size enclosure, or to maintain the same functional capability, but reduce the size. Another goal is to reduce cost. Surface Mount Technology (SMT) for solid-state assemblies helps meet both of these goals and is applicable to consumer, commercial, industrial and military equipment.

As the next step in the advance of high-density integrated circuit assemblies for equipment manufacture, SMT opens new avenues of freedom to the electronic design engineer frustrated by size, weight, and density limitations of conventional packaging. It can dramatically increase board density, while affording significant performance advantages. It can reduce the volume, weight, and cost of many printed-circuit boards (PCBs).

Surface mount components (SMCs) lend themselves readily to automated assembly, using high-speed pick-and-place machines. Thus, shipping, inventory, and handling costs are reduced. Additional benefits offered by SMCs include:

1. Increased reliability.
2. Lower noise and improved frequency response resulting from shorter circuit paths.
3. Simpler electromagnetic interference (EMI) shielding and filtering needed to meet Federal Communications Commission standards for EMI generation.

As a major manufacturer of SMCs, TI is committed to helping the customer make the transition to surface mount as easy and economical as possible. Getting started in SMT – switching from older and less efficient methods of PCB fabrication – means learning some new manufacturing techniques, and may entail some capital overlay. In volume production, however, it can actually reduce capital and space costs.

## BROAD SURFACE MOUNT CHOICE

TI's commitment to the program is evidenced by the steadily expanding list of IC products in surface mount packages. There are currently over 2550 different packages which include:

- More than 1550 digital bipolar logic devices
- More than 250 linear circuits – op amps, comparators and timers, line circuits, peripheral drivers, and voltage regulators
- More than 600 CMOS digital devices
- MOS DRAMs, TI's video RAM, FPLA, IMPACT™, PAL® circuits and PROMs
- Microcontrollers, standard cells and gate arrays.

## SURFACE MOUNT COMPONENT PACKAGING OPTIONS

TI manufactures five types of surface mounted IC packages to support the design, development and production of surface mount assemblies (Table 1). Plastic leaded chip carriers (PLCC), small outline integrated circuits (SOIC), and small outline integrated circuits with "J" leads (SOJ) support the commercial market. Leadless ceramic chip carriers (LCCC) and leaded ceramic chip carriers (LDCC) support the military market. TI participates in the establishment of JEDEC standards, and most of the surface mount products manufactured by TI have JEDEC standard pin-outs.

**Table 1. Surface Mount Component Packaging Options**

PACKAGE TYPE	PIN COUNT	LINEAR	LOGIC	PAL's, FPLA's PROM's, EPROM's	SEMI CUSTOM	DRAM's	MICROPROCESSOR & PERIPHERALS
D (SOIC)	8	•					
	14	•	•				
	16	•	•				
DJ (SOJ)	20					•	
DW (SOIC)	16		•				
	20	•	•				
	24	•	•				
	28		•		•		
FD (LCCC)	44	•	•		•		•
	68		•		•		•
FG (LCCC)	18					•	
FK (LCCC)	20	•	•	•	•		
	28	•	•	•	•		•
FJ (LDCC)	44	•					
	68				•		•
FM (PLCC)	18					•	
	22					•	
	32			•			
FN (PLCC)	20	•	•	•	•		
	28	•	•	•	•		•
	44	•	•		•		•
	68		•		•		•
	84				•		
FP (PLCC)	18					•	
FV (LCCC)	18					•	

---

## **Products in Chip Carrier (PLCC, LCCC & LDCC) and Small Outline Packages (SOIC & SOJ)**

It is anticipated that most new users of surface-mounted components will require the PLCC, SOIC, or SOJ packages since they were developed primarily for commercial, industrial and consumer-oriented products. The LCCC & LDCC packages were developed primarily for military equipment that requires the extended environmental characteristics and high reliability specifications provided by hermetically sealed packages.

## **MEMORY MODULES**

The memory module provides a somewhat different approach for satisfying increased memory density requirements. The complete assembly – consisting of several memory devices in chip-carriers or SOJ packages mounted with decoupling capacitors on a common substrate with connections to the module pins or “nodules” along one edge of the substrate – is called a Single-In-Line Package (SIP) memory module. Since they can be mounted perpendicularly on a mother board of standard through-hole design, SIPs require smaller footprints than designs utilizing standard DIPs. Socketable SIPs can also be mounted on the mother board using standard connectors from such manufacturers as Texas Instruments. Sockets are available in perpendicular and angular (for height sensitive applications) versions.

## **TEXAS INSTRUMENTS SURFACE MOUNT CUSTOMER CENTER**

The Surface Mount Customer Center provides all customers with hands-on experience and assistance in surface mount assembly. The center is equipped to do surface mount assembly of integrated circuits, resistors, and capacitors on the customer’s PWB or a TI-provided demonstration board. The adjacent SIP manufacturing line may be viewed as an example of a volume production facility. To obtain more detailed information on the Surface Mount Customer Center, call the nearest Field Sales Office or TI Distributor.

Refer to the Products Support Section and to the back of this Guide for addresses and telephone numbers.

## **PRODUCT LISTING**

The demand for SMCs is increasing and the product line is steadily expanding. Contact your local TI field sales office or local authorized distributor for the latest Texas Instruments Surface Mount availability.



---

# CUSTOMER SUPPORT

Texas Instruments offers a wide array of circuit design tools and support services ranging from design kits, Regional Technology Centers, technical seminars and workshops, to technical documentation.

TI's library of design kits assists design engineers in evaluating some of its most sophisticated components. Regional Technology Centers (RTCs) offer an unmatched array of up-to-date technical seminars and workshops for the benefit of customers requiring engineering details on TI products for design or evaluation purposes.

New product information is available via VIDEOLOG. An electronic search-by-part-number feature of VIDEOLOG's catalog section allows the user to locate information on any TI semiconductor product.

Technical documentation is fully described — forms are provided to simplify the ordering process.

<b>Contents</b>	<b>Page</b>
Design Kits .....	12-2
Videolog .....	12-3
Technical Seminars and Workshops .....	12-4
Semiconductor Literature .....	12-6
Data Sheet/Other Literature Order Form .....	12-7
Semiconductor Book Descriptions .....	12-9
Semiconductor Book Order Form .....	12-15

---

## DESIGN KITS

TI's library of design kits assists design engineers in evaluating some of its most sophisticated components. TI offers the "TMS380 Design-In Accelerator Kit" as a LAN aid in the design of an IBM-compatible Token-Ring Network Adapter. The "TMS320 DSP Design Kit" is intended for use in TMS320 Digital Signal Processor applications, and the "TMS340 Graphics Design Kit" provides a bit-mapped text and graphics approach. The "Memory Management Design Kit" is a tool aimed at assisting the designer in optimizing memory interface (access time).

The kits reduce design cycle time by providing everything in one convenient package.

- The "TMS380 Design-In Accelerator Kit" (TMS380LDK-1) is useful to designers of token ring adapter hardware. It comes with three complete TMS380 LAN adapter chipsets. Documents include a TMS380 Bring-Up Guide for testing hook ups, a TMS380 Product Description and a TMS380 Adapter Chipset User's Guide. Also provided are EPROMs containing software for verifying and testing an IBM-compatible prototype adapter card design.
- The "TMS380 ASIC-LAN Toolkit" (TMDP380ASIC) provides assistance to those LAN customers\* who have layout area constraints. The kit helps to shorten design cycle time – in some cases by as much as two or three months – and also reduces development costs, since it contains captured schematics with test vectors. Soft macro building blocks, allowing the designer to customize the design or to start from the ground up, are included.
- The "TMS380 Bridge Design Kit" (TMDX380BMP) assists in making design easier for implementing bridging – for the purpose of hooking one token ring to another token ring to expand the local area network in reach or in number of stations – using the IBM method of Source Routing or the IEEE 802.1 method of Adaptive Bridging. The kit contains: one TMS38021; one set of TMS380 Bridge Options Software in two 8K × 8 EPROMs (this software is executed by the TMS38010 and includes features desired in bridge applications); and a TMS38021 Bridge Applications Report, including the TMS38021 device data sheet.
- The "TMS380 802.2 LLC Evaluation Kit" (TMDS380LLC) provides the means to evaluate IBM-compatible IEEE 802.2 software Logical Link Control on token ring TMS380-based hardware. The kit includes: three samples of IEEE 802.2 software on floppy media for download into DRAM, or in non-volatile 16K × 8 EPROMs; an IBM compatible Adapter Handler Emulator on floppy media; and a TMS380 User's Guide Supplement including the LLC Extended System Software Interface.
- The "TMS320 DSP Design Kit" (TMS320DDK) provides the key building blocks for prototyping a DSP system. It includes two DSP chips, TI's first generation TMS32010 and second generation TMS32020, along with support peripherals. Two design examples (TMS32010 ADPCM and TMS32020 FFT) are also provided, along with a 735-page manual, "Digital Signal Processing Applications with the TMS320 Family." Also included is the Digital Signal Processing Software Library, containing source code for most of the DSP applications discussed in the Applications Book as well as other valuable routines.
- For immediate evaluation of the DSP2400 Modem Chipset, TI offers a "DSP2400 Prototype Kit" (TMDSP2400PK). The kit contains an assembled modem prototype on a PC half-card as well as the DSP2400 User's Guide. The user's guide contains all the information required to operate, evaluate and manufacture a DSP2400-based modem, including operating instructions, schematics, lists of materials and assembly drawings.

- 
- The “TMS340 Graphics Design Kit” (TMS340GDK) contains one full set of components likely to be used in a unified text/graphics system. These include a TMS34061 video system controller, TMS34070 color palette, two TMS4161EV4-15 64K × 4 video RAM SIPs, two SN74AS194N 4-bit bidirectional universal shift registers and a 68-pin PLCC socket for the TMS34061 VSC. Documents include user’s guides for the TMS34061 and TMS34070, along with data sheets for the TMS4161 SIPs and SN74AS194N shift register.
  - The “TMS34010 Graphics Design Kit” (TMS34010GDK) contains the essential components needed to begin designs with the TMS34010 Graphics System Processor. Included is a TMS34010, a TMS34070 Color Palette, four TMS4461 256K Video RAMs, and a 68-pin socket. Also part of the kit are an Assembler, Linker, Simulator, and Function Library Sampler software packages. A complete set of applicable user’s guides, data sheets, and application notes are included as well.
  - The “Memory Management Design Kit” (SN74MMDK01) consists of devices, documentation, and graphics model software to allow a designer to optimize a memory interface system. Included are a 32-bit EDAC, 1 megabit DRAM Controller, Cache Tag device, BiCMOS memory driver, a 10 ns PAL and logic sequencer for timing control, a 256K DRAM, data sheets and an Application Handbook describing possible combinations of products. The kit also contains graphics model software from third-party suppliers to support workstation design efforts.

The TI design kits may also be used as follow-up support for corresponding TI RTC courses.

Contact a TI field sales representative for more information.

A complete listing of field sales offices, authorized TI distributors, TI Regional Technology Centers (RTCs) and the TI customer response center is on the back page of the Guide.

## VIDEOLOG

New product information on components, specifications, pricing, and sales locations is available from TI via VIDEOLOG. Using VIDEOLOG’s convenient one-stop shopping service helps the design engineer to do the job right the first time and gives him or her a clear leadership edge.

All TI products are maintained in the catalog section of VIDEOLOG. An electronic search-by-part-number feature allows the user to locate information on any TI product.

A product preview section offers the design engineer an advance look at new TI products prior to their release. There is also an FYI (For Your Information) section containing headline items of interest.

Call 1-800-VIDPEEK (1-800-843-7335) with any ASCII (80 column) terminal and modem (even parity, 7 data bits, 1 stop bit) for a free on-line demonstration of the VIDEOLOG service. Or call 1-800-VIDEOLOG (1-800-843-3656) for more information. In Connecticut call 203-838-5100.

\*Unless the designer has previous ASIC experience, it is highly recommended that the Advanced Standard Cell Workshop (#RTC220) be taken first.



---

## TECHNICAL SEMINARS AND WORKSHOPS

Texas Instruments Regional Technology Centers (RTCs) offer an unmatched array of up-to-date technical seminars and workshops at seven convenient locations across North America for the benefit of customers requiring engineering details on Texas Instruments products for design or evaluation purposes.

### ½ DAY TECHNICAL SEMINARS

RTC technical product seminars can help the individual keep abreast of the growing array of TI system products. These seminars -- aimed at system architects and decision makers who will find facts and answers needed to make more informed, timely decisions -- are available upon request on similar topics as the "Hands-On Workshops" listed below.

### HANDS-ON WORKSHOPS

RTC workshops give design engineers and implementors experience using the latest advanced technology TI products, development tools, and design techniques. Participants can accelerate their learning curves dramatically by attending these up-to-date, hands-on workshops.

TI goes beyond the standard format. Students get started right away by using the latest development tools possible and by interacting with expert instructors who teach them design techniques that only come through experience. The exercises and lab experiments start with the basics and move quickly into real-world examples. In TI workshops, students learn by DOING, not just by listening and watching. Courses currently being offered include:

- TMS320C1X Digital Signal Processor (DSP) Design Workshop (RTCWS-320DSP1)
- TMS320C2X Digital Signal Processor (DSP) Design Workshop (RTCWS-320DSP2)
- Application Specific IC (ASIC) Design Workshop (RCTWS-ASIC1)
- TMS34061 Graphics System Design Workshop (RTCWS-34061)
- TMS34010 Graphics System Processor Design Workshop (RTCWS-34010)
- TMS380 IBM® Token-Ring Network Design Workshop (RTCWS-380LAN1)
- AS888/890 Bit-Slice Design Workshop (RTCWS-AS888)
- Field Programmable Logic (FPL) Design Workshop (RTCWS-FPL)

### TMS320 Digital Signal Processor Design Workshops (RTCWS-320DSP1,RTCWS-320DSP2)

The established leader in digital signal processing, TI offers a complete family of compatible DSPs. The four-day TMS320C1X workshop (RTCWS-320DSP1) is an excellent introductory course for first-time TMS320 users. The intensive three and one-half day TMS320C2X workshop (RTCWS-320DSP2) is for advanced applications using the TMS320C2X "second generation" digital signal processor. Both workshops are practical design courses which allow the student to practice what he or she learns.

### Application Specific IC (ASIC) Design Workshop (RTCWS-ASIC1)

Digital logic design engineers can easily make the transition to gate array and/or standard cell IC design at TI's three-day ASIC workshop. They will be taught by experienced ASIC design engineers from RTC design sites, and will gain a detailed understanding of the overall ASIC design flow. The course is valuable whether the customer intends to use RTC design services or else his or her own in-house design team.

---

### **TMS34061 Graphics System Design Workshop (RTCWS-34061)**

During this three-day workshop, the design engineer will be using the new TMS340 Color Graphics Controller (CGC) Board, which works with IBM-compatible PCs. The student will come away from the course with the ability to design his or her own bit-mapped graphics system utilizing these new members of a growing family of graphics products from TI, the pioneer in video-graphics ICs.

### **TMS34010 Graphics System Processor Design (RTCWS-34010)**

This four-day workshop will enable the design engineer to get the most out of the powerful new TMS34010 Graphics System Processor (GSP), by accelerating the learning curve and speeding the design and delivery of a TMS34010-based product. The student will learn how to use the TMS34010, either alone or as a system building block, by the use of numerous design techniques commonly used in the application of bit-mapped graphics.

### **IBM Token-Ring Network Design Workshop (RTCWS-380LAN1)**

In this three-day workshop, the student learns how to design the IBM Token-Ring Network into his or her end equipment using the TI TMS380 Token-Ring LAN chipset, the only complete LAN connection solution compatible with the IBM Token-Ring Network and the IEEE 802.5 specification. During the workshop, the design engineer will learn how to use the TMS380 chipset with popular 16- and 32-bit microprocessors, backplane buses, and operating systems.

### **'AS888/890 Bit-Slice Design Workshop (RTCWS-AS888)**

In this two-day workshop, the student learns how to tap the power and performance of the 'AS888 bit-slice processor and the 'AS890 microcontroller, and also gains an understanding of other high-speed components including the 'AS897 barrel shifter and THCT1010 multiplier/accumulator.

### **Field Programmable Logic (FPL) Design Workshop (RTCWS-FPL)**

This one-day workshop introduces the design engineer to the TI IMPACT (IMPlanted Advanced Composed Technology) FPL devices. These parts establish a new performance standard with propagation delays cut 40% to 15 ns, at 180 mA. During this workshop, the student will design the logic for a simple dice game and program a single FPL device to implement the game.

### **ENROLLMENT AND ADDITIONAL INFORMATION**

Call the appropriate Regional Technology Center (RTC) to enroll or for additional information. Workshops enrollment is limited to 10. It is recommended that individuals sign up at least three weeks in advance to reserve space in a course. Refer to the back of this Guide for addresses and telephone numbers.

---

## SEMICONDUCTOR LITERATURE

As explained in Page 2, Section 1 of this Guide, TI's semiconductor literature is identified by a seven- or eight-character product source code consisting of four (4) alpha characters, three (3) numeric characters, and a revision letter if applicable. The fourth alpha character designates a particular document as follows:

<b>CODES</b>	<b>DESCRIPTION</b>
A	Application Notes, Briefs, Reports
B	Brochures
C	Catalogs, Master Selection Guides
D	Data Books
S	Data Sheets, Data Manuals on Single Products
T	Direct Mail Materials
U	Owner's Manuals, Software Manuals, User's Guides
Z	Other

As an example, literature code SDLD001 identifies a data book, code SLNA001 an application report, and code SPVB061 a brochure.

Data sheets and data books are available for most of the products listed in the Master Selection Guide. Application notes are also available. Other literature includes the following:

### OTHER LITERATURE:

<b>DESCRIPTION</b>	<b>DOCUMENT</b>
74AS EVM-1 Bit-Slice Evaluation Module User's Guide	SDBU004
Military Products Designer's Reference Guide	SGYZ001B
TMS700 Family Product Bulletin	SPNT020
TMS320 DSP Reference Guide	SPRU011
TMS34010 Graphics Design Kit Flyer	SPVB061
TMS340 Graphics 3rd Party Guide	SPVB066
TMS340 Graphics Design Kit Reference Guide	SPVZ001
TMS380 Lan Product Bulletin	SPWT018A
Regional Technology Center Course Catalog	SSRC007
Texas Instruments Lowers Semiconductor Cost-of-Ownership	SSVB057

# DATA SHEET/OTHER LITERATURE ORDER FORM

Name

Title

Company

Address & M/S

City  State  Zip

Phone - Extension

SSY18FMS700C

Please select any combination up to 10 free pieces from the data sheets and other literature listed below. You will only receive the first 10 selections if you exceed the 10 piece limit.

**Data Sheets:**

- |                                   |                                   |                                   |                                   |                                  |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|
| <input type="checkbox"/> SCCS005B | <input type="checkbox"/> SDAS114  | <input type="checkbox"/> SLAS010  | <input type="checkbox"/> SLLS027  | <input type="checkbox"/> SLOS015 |
| <input type="checkbox"/> SCLS044  | <input type="checkbox"/> SDAS116  | <input type="checkbox"/> SLAS013  | <input type="checkbox"/> SLLS028A | <input type="checkbox"/> SLOS016 |
| <input type="checkbox"/> SCLS051  | <input type="checkbox"/> SDAS117  | <input type="checkbox"/> SLCS001  | <input type="checkbox"/> SLLS029  | <input type="checkbox"/> SLOS017 |
| <input type="checkbox"/> SCLS052  | <input type="checkbox"/> SDAS118  | <input type="checkbox"/> SLCS002  | <input type="checkbox"/> SLLS030  | <input type="checkbox"/> SLO3001 |
| <input type="checkbox"/> SCLS055  | <input type="checkbox"/> SDAS119  | <input type="checkbox"/> SLCS003  | <input type="checkbox"/> SLLS031  | <input type="checkbox"/> SLO3002 |
| <input type="checkbox"/> SCLS056  | <input type="checkbox"/> SDAS120A | <input type="checkbox"/> SLCS004  | <input type="checkbox"/> SLNS001A | <input type="checkbox"/> SLO3003 |
| <input type="checkbox"/> SCSS001  | <input type="checkbox"/> SDAS121A | <input type="checkbox"/> SLFS001  | <input type="checkbox"/> SLNS002A | <input type="checkbox"/> SLO3004 |
| <input type="checkbox"/> SCSS002  | <input type="checkbox"/> SDAS126  | <input type="checkbox"/> SLFS002  | <input type="checkbox"/> SLNS003A | <input type="checkbox"/> SLO3005 |
| <input type="checkbox"/> SCSS003B | <input type="checkbox"/> SDAS127  | <input type="checkbox"/> SLFS003  | <input type="checkbox"/> SLNS008  | <input type="checkbox"/> SLO3006 |
| <input type="checkbox"/> SCTS003A | <input type="checkbox"/> SDAS130  | <input type="checkbox"/> SLFS004  | <input type="checkbox"/> SLNS015  | <input type="checkbox"/> SLO3007 |
| <input type="checkbox"/> SCTS020  | <input type="checkbox"/> SDAS131  | <input type="checkbox"/> SLFS005  | <input type="checkbox"/> SLNS016  | <input type="checkbox"/> SLRS011 |
| <input type="checkbox"/> SCTS021  | <input type="checkbox"/> SDPS018  | <input type="checkbox"/> SLFS006  | <input type="checkbox"/> SLNS017  | <input type="checkbox"/> SLRS012 |
| <input type="checkbox"/> SCTS022  | <input type="checkbox"/> SDPS020  | <input type="checkbox"/> SLFS007  | <input type="checkbox"/> SLNS018  | <input type="checkbox"/> SLSS001 |
| <input type="checkbox"/> SDAS100  | <input type="checkbox"/> SGLS014  | <input type="checkbox"/> SLFS008  | <input type="checkbox"/> SLOS007  | <input type="checkbox"/> SLSS002 |
| <input type="checkbox"/> SDAS103  | <input type="checkbox"/> SGLS015  | <input type="checkbox"/> SLFS011  | <input type="checkbox"/> SLOS008  | <input type="checkbox"/> SLVS004 |
| <input type="checkbox"/> SDAS104  | <input type="checkbox"/> SGMS005A | <input type="checkbox"/> SLFS012  | <input type="checkbox"/> SLOS010  | <input type="checkbox"/> SLVS005 |
| <input type="checkbox"/> SDAS105  | <input type="checkbox"/> SGMS006A | <input type="checkbox"/> SLFS013  | <input type="checkbox"/> SLOS011  | <input type="checkbox"/> SLVS007 |
| <input type="checkbox"/> SDAS106  | <input type="checkbox"/> SGMS007  | <input type="checkbox"/> SLFS014  | <input type="checkbox"/> SLOS012  | <input type="checkbox"/> SLVS009 |
| <input type="checkbox"/> SDAS107  | <input type="checkbox"/> SGMS020  | <input type="checkbox"/> SLFS015  | <input type="checkbox"/> SLOS013  | <input type="checkbox"/> SLVS010 |
| <input type="checkbox"/> SDAS108  | <input type="checkbox"/> SGMS256A | <input type="checkbox"/> SLLS007A | <input type="checkbox"/> SLOS014  | <input type="checkbox"/> SLVS012 |

(over)

Customer Support

**Return to: Texas Instruments Literature Response Center, P.O. Box 809066, Dallas, TX 75380-9066**

**12**

---

**Data Sheets (Continued):**

- |                                   |                                   |                                   |                                   |                                  |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|
| <input type="checkbox"/> SLVS013  | <input type="checkbox"/> SMGS027  | <input type="checkbox"/> SMLS512A | <input type="checkbox"/> SMVS011A | <input type="checkbox"/> SPSS007 |
| <input type="checkbox"/> SLVS014  | <input type="checkbox"/> SMGS256  | <input type="checkbox"/> SMMS102B | <input type="checkbox"/> SPRS009  | <input type="checkbox"/> SPSS008 |
| <input type="checkbox"/> SLVS015  | <input type="checkbox"/> SMGS257  | <input type="checkbox"/> SMMS104  | <input type="checkbox"/> SPRS010  | <input type="checkbox"/> SPSS009 |
| <input type="checkbox"/> SLVS016  | <input type="checkbox"/> SMLS010  | <input type="checkbox"/> SMPS128A | <input type="checkbox"/> SPRS011  |                                  |
| <input type="checkbox"/> SMBS464B | <input type="checkbox"/> SMLS064  | <input type="checkbox"/> SMPS256A | <input type="checkbox"/> SPRT033A |                                  |
| <input type="checkbox"/> SMGS024A | <input type="checkbox"/> SMLS210  | <input type="checkbox"/> SMPS512  | <input type="checkbox"/> SPRT036  |                                  |
| <input type="checkbox"/> SMGS025A | <input type="checkbox"/> SMLS291A | <input type="checkbox"/> SMQS256B | <input type="checkbox"/> SPSS004  |                                  |

**Other Literature:**

- |                                  |                                  |                                  |                                   |                                  |
|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|
| <input type="checkbox"/> SDBU004 | <input type="checkbox"/> SPNT020 | <input type="checkbox"/> SPVB061 | <input type="checkbox"/> SPVZ001  | <input type="checkbox"/> SSRC007 |
| <input type="checkbox"/> SGYZ001 | <input type="checkbox"/> SPRU011 | <input type="checkbox"/> SPVB066 | <input type="checkbox"/> SPWT018A | <input type="checkbox"/> SSYB057 |

---

## SEMICONDUCTOR BOOK DESCRIPTIONS

- Advanced CMOS Logic Designer's Handbook - 1987** 296 Pages SCAA001  
A reference guide that spells out the technical issues confronting advanced logic design engineers and describes the methods for handling the issues. Provides an overview of TI's EPIC™ Advanced CMOS Logic (ACL) family, its characterization and specifications, and the very important issue of simultaneous switching, which, if not treated correctly, can result in unreliable systems operation. PC board and system-level design consideration are included.
- Advanced CMOS Logic Data Book - 1987** 300 Pages SCAD001  
Detailed specifications and applications information on the TI family of 1- $\mu$ m EPIC Advanced CMOS Logic devices. ACL offers less than 3 ns propagation delays at CMOS power dissipation, yet has 24 mA drive capability. Product selection guide and alphanumeric index are included.
- TMS4500A Dynamic RAM Controller User's Guide - 1985** 39 Pages SCG690A  
Describes functional operation of the TMS4500A and how it can be used in a microprocessor system. Includes introduction, basic operation, typical implementation, design criteria and application examples.
- High-Speed CMOS Logic Data Book - 1984** 800 Pages SCLD001A  
Detailed specifications and application information on the TI family of High-Speed CMOS (HCMOS) Logic devices. Includes product selection guide, glossary and alphanumeric index.
- Telecommunications Circuits Data Book - 1986** 380 Pages SCTD001  
Detailed specifications and application information on the TI family of telecommunications products. This includes switching and transmission, codecs, filters, combos, FSK modems, subscriber line control, and subscriber products. Contains product selection guide, glossary and alphanumeric index.
- ALS/AS Logic Data Book (TTL Vol 3) - 1986** 1100 Pages SDAD001B  
Detailed specifications and applications information on the TI family of Advanced Low-Power Schottky (ALS) and Advanced Schottky (AS) logic devices. Includes a functional index of all TI bipolar digital devices.
- SN74AS888/890 Bit-Slice User's Guide (8-BIT) - 1985** 222 Pages SDBU001A  
Introduces the 74AS888 and 74AS890 8-bit bit-slice ALU and sequencer, provides detailed specifications on their operation and outlines support tools available for system development.
- SN74AS897 16-Bit Barrel Shifter User's Guide - 1985** 60 Pages SDBU003  
Detailed specifications and application information on the SN74AS897 16-bit barrel shifter. Includes architecture description, 16-bit/32-bit shift operation examples, instruction set, multiple cycle operation and electrical characteristics.
- F Logic Data Book - 1987** 281 Pages SDFD001  
Detailed specifications and application information on the TI family of SN54F/SN74F TTL logic devices.
- TTL Data Book Vol 2 - 1985** 1400 Pages SDLD001  
Detailed specifications and application information on the TI family of Low-power Schottky (LS), Schottky (S) and standard TTL logic devices. The logic symbols are in accordance with IEEE and IEC standards.

- Memory Management Applications Handbook - 1987** **100 Pages** **SDVA002**  
 A collection of application reports and application briefs on new single-chip memory management products. Covers complex functions such as Cache Tag control, DRAM address multiplexing and refresh, and soft error correction. Discussion of the use of memory timing controllers, cache memory systems, error detection and correction, FIFO memories, and BICMOS interface ICS are included.
- LSI Logic Data Book - 1986** **872 Pages** **SDVD001**  
 Detailed specifications and application information on LSI special functions that add to AS, ALS and LS families. Includes 8-bit bit-slice devices, FIFOS, EDAC, memory mapping units and 8-,9-, and 10-bit registers.
- Overview of IEEE Standard 91 - 1984** **32 Pages** **SDYZ001**  
 A brief, condensed overview of the symbolic language for digital logic circuits by the IEEE and the IEC Technical Committee TC-3 incorporated in IEEE STD. 91-1984.
- TTL Data Book Vol 4 - 1986** **486 Pages** **SDZD001B**  
 Detailed specifications and application information on the TI family of bipolar Field-Programmable Logic Arrays (FPLA & PAL<sup>®</sup>), Programmable Read-Only Memories (PROM), Random-Access Memories (RAM), microprocessors and support circuits.
- Linear Circuits Application - 1986** **148 Pages** **SLNA001**  
 The U.S. edition of a popular design manual first published in Europe. It discusses key issues in using LinCMOS<sup>™</sup> circuits to design amplifiers, oscillators, filters, sample-and-hold, and many other types of common circuits. The generalized schematics, design equations, and performance curves will be useful even for those working with traditional technologies.
- Linear and Interface Circuits Applications Vol 1 - 1985** **160 Pages** **SLYA001**  
 Containing basic theory, key characteristics and applications, the prime objective of the book is to assist the user of the broad range of linear and interface integrated circuits to understand the operating principles. Such circuits are normally used to sense or activate circuits, subsystems, or systems that interface to complex digital systems. Covers amplifiers, comparators, timers and voltage regulators.
- Linear and Interface Circuits Applications Vol 2 - 1985** **136 Pages** **SLYA002**  
 Continues with the same content as Volume 1. Emphasis is on circuits used for data transmission and for the display of information at the human-machine interface. LED, plasma (both dc and ac), gas discharge, vacuum fluorescent and thin-film electroluminescent display drivers are included. For data transmission, all the various RS-232C, 423A, 422A, 485 and IEEE-488 line drivers, receivers and transceivers are included.
- Linear and Interface Circuits Applications Vol 3 - 1987** **280 Pages** **SLYA003**  
 Volume III of a three-volume set that emphasizes peripheral circuits used to interface between TTL, MOS, and CMOS logic levels and higher voltage and current components. It also covers data acquisition systems (A/D and D/A) as they interface to various microprocessor chips. Hall effect theory and applications also are included.
- Linear Circuits Data Book - 1984** **792 Pages** **SLYD001**  
 Detailed specifications on operational amplifiers, voltage comparators, voltage regulators, data-acquisition devices, A/D converters, timers, switches, amplifiers, and special functions. Includes LinCMOS<sup>™</sup> functions. Contains product guide, interchangeability guide, glossary and alphanumeric index.

- 
- Interface Circuits Data Book - 1987** **1300 Pages SLYD002**  
 Detailed specifications on display drivers, line driver/receivers, peripheral drivers/actuators, memory interface, data acquisition, and speech synthesis circuits. Includes cross reference guides, power derating curves, and explanation of logic symbols.
- Linear and Interface Circuits Application (Vol 1, 2, & 3)** **580 Pages SLYX001A**  
 Combines SLYA001, SLYA002 AND SLYA003 in a binder (see descriptions above).
- MOS Memory Data Book - 1986** **804 Pages SMYD006**  
 Detailed specifications and application information on Dynamic RAMs (DRAMs). Single-In-Line Package (SIP) DRAM Modules, EPROMS and One-Time Programmable ROMs. Contains military specifications for the DRAM product line. Includes reference and selection guides, interchangeability guide, glossary and alphanumeric index. Also, a chapter containing ESD guidelines.
- TMS7000 Family Data Manual - 1986** **560 Pages SND001B**  
 Describes the architecture, the on-chip peripheral functions and the instruction set of the TMS7000 Family of NMOS and CMOS 8-bit microcomputers. Contains the assembly language user's guide, data sheets and application notes.
- Optoelectronics Data Book - 1987** **480 Pages SOYD002**  
 Detailed specifications on CCD image sensors, optocouplers/optoisolators, intelligent displays, and infrared-emitting diodes and phototransistors. Includes quality/reliability and applications notes, mechanical information on each device, alphanumeric index, reference guides, interchangeability guide, and glossary.
- TMS7500/75C00 User's Guide - 1984** **55 Pages SPNU004**  
 Describes the operation, interface and applications of the TMS7500/TMS75C00 Data Encryption devices, which operate as peripherals and perform the National Bureau of Standards (NBS) Data Encryption Standard algorithm.
- TMS9914A GPIB Controller User's Guide - 1985** **76 Pages SPPU013**  
 Tutorial guide bridging the gap between the microprocessor design engineer/programmer and other IEEE-488 and TMS9914A documentation. Includes a review of IEEE-488 GPIB functions and examples of the bus functions.
- TMS34061 User's Guide - 1986** **218 Pages SPPU014A**  
 A detailed description of the TMS34061 Video System Controller's architecture and specifications. Includes application solutions.
- TMS34070 User's Guide - 1986** **98 Pages SPPU016A**  
 Detailed description of the TMS34070 Color Palette's architecture and specifications. Includes application solutions.
- Color Graphics Controller Board User's Guide - 1986** **50 Pages SPPU019A**  
 Detailed description of the installation and operation of the PC-compatible TMS34061/34070 Color Graphics Controller Board. Includes theory of operation, how to program, PAL equations and schematics.
- Digital Signal Processing with the TMS320 Family - 1986** **724 Pages SPRA012A**  
 Twenty-four detailed application reports containing the theory, implementation and TMS320 source code for the application. Common DSP routines such as FIRs, IIRs AND FFTs are covered as well as telecom and computer specific applications such as echo cancellation, encryption, ADPCM, speed coding, DTMF, graphics, digital control and others.

NOTE: It is our policy to substitute the latest available edition.



---

## Theory and Implementation of a Splitband Modem Using the

### **TMS32010 - 1987**

**116 Pages    SPRA013**

An application report that discusses the digital implementation of a modem using the TMS32010 Digital Signal Processor. Attention is focused on splitband modems — a class of modems that splits the bandwidth of the communications channel (telephone network) so that full-duplex operation can occur. This report describes the theory and implementation of the Bell 212A/V.22 recommendation, a 1200-BPS splitband modem.

### **TMS32010 Assembly Language Programmer's Guide - 1984**

**184 Pages    SPRU02B**

Includes general programming information, assembly instructions, assembler directives and assembler output.

### **TMS320 1st Generation User's Guide - 1987**

**400 Pages    SPRU013**

A useful reference for all the first-generation devices of the TMS320 Family — the TMS32010/11 (NMOS) and TMS320C10/C15/E15/C17/E17 (CMOS). The TMS320 Family has now expanded into three generations of processors. This guide covers the first generation giving readers in-depth information on device architecture, specifications (data sheet), pinouts, assembly language instruction set, and hardware/software applications.

### **TMS320 2nd Generation User's Guide - 1987**

**500 Pages    SPRU014**

Designed to assist hardware/software engineers in application development, this guide covers the TMS320C25 (CMOS) and TMS32020 (NMOS) devices. It provides information regarding the high-performance, versatility, and specialized device features used in a variety of sophisticated Digital Signal Processor (DSP) applications. This guide covers second generation devices and gives readers in-depth information on device architecture, specifications (data sheets), pinouts, assembly language instruction set and hardware/software applications.

### **TMS34010 Application Guide - 1987**

**170 Pages    SPVA007**

Describes five graphics system applications using the TMS34010. Subjects included are  $512 \times 512$  and  $1.024 \times 768$  pixel minimum chip solution, DRAM interfacing techniques, implementation of CGA, and approaches to EGA compatibility.

### **TMS34010 User's Guide - 1987**

**600 Pages    SPVU001**

Provides a detailed description of the TMS34010 Graphics System Processor. Topics include the TMS34010 architecture, memory organization, instruction set and specifications. This manual is indispensable for evaluating or designing with the TMS34010.

### **TMS34010 Software Development Board User's Guide - 1987**

**224 Pages    SPVU002**

Describes the installation and operation of the TMS34010 Software Development Board. The commands and syntax for the user interface debugger are discussed in detail.

### **TMS34010 Software Development Board Schematics - 1987**

**10 Pages    SPVU003**

A complete set of size A drawing schematics for the TMS34010 Software Development Board.

### **TMS34010 Assembly Language Tools User's Guide - 1987**

**358 Pages    SPVU004**

Describes the operation of the TMS34010 Assembler Package. Included are details of the macro-assembler, archiver, linker, ROM utility, and software simulator.

### **TMS34010 C Compiler User's Guide - 1987**

**208 Pages    SPVU005**

Provides detailed information on installation, invocation and operation of the TMS34010 C Compiler. Included are an explanation of the extensions to the standard Kernighan and Ritchie C compiler for enumerated data types and in-line assembly code.

NOTE: It is our policy to substitute the latest available edition.

---

**TMS34010 Font Library User's Guide - 1987****72 Pages****SPVU007**

Describes the TMS34010 Font Library. Includes ASCII representations of each font character along with printed examples.

**TMS380 Adapter Chipset User's Guide - 1986****399 Pages****SPWU001D**

Information about the TMS380 LAN (Local Area Network) Adapter Chipset used for the IEEE802.5 compatible IBM Token-Ring Network. Included is an introduction to the Token-Ring architecture and the TMS380 chipset, application examples, details on adapter communication services, adapter design information and component specification data sheets.

**2- $\mu$ m CMOS Standard Cell Data Book - 1986****800 Pages****SRSD001**

Detailed specifications on the 2- $\mu$ m CMOS SystemCell™ family of over 320 standard cells that include SSI, MSI, LSI, and analog functions, as well as RAM and design support functions. Includes functional and alphanumeric indexes, new product information, applications information, functional symbol and definitions guide, absolute maximum and recommended operating conditions, mechanical and quality/reliability information.

**How to Use Surface Mount Technology - 1984****112 Pages****SSYZ001**

A technical summary that explains the new semiconductor assembly technology using surface-mounted components — what it is and how it is used. Covers Plastic Leaded Chip Carriers (PLCC), Leadless Ceramic Chip Carriers (LCCC) and Small-Outline Integrated Circuit (SOIC) packages; even discusses mixing surface-mounted components with DIP packages in the same assembly.



# SEMICONDUCTOR BOOK ORDER FORM

Send check, money order or company purchase order to:

Ship to:

Texas Instruments Incorporated  
Data Book Marketing  
P.O. Box 117692  
Carrollton, TX 75011-7692

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_  
\_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone (\_\_\_\_\_) \_\_\_\_\_

**Prepaid Orders:** must include sales tax\* and \$1.25 per book for shipping and handling.

**Purchase Order Terms:** \$100.00 minimum order, net 30 days, FOB Dallas, TX. Shipping and taxes\* will be added to invoice.

\* State and local taxes required from all states except AK, DE, MT and OR.

BOOK TITLES	BOOK NO.	QUANTITY	UNIT PRICE	EXTENDED AMOUNT
Advanced CMOS Logic Designer's Handbook - 1987	SCAA001		\$ 11.95	\$
Advanced CMOS Logic Data Book - 1987	SCAD001		11.95	
TMS4500A Dynamic RAM Controller User's Guide - 1985	SCG690A		4.95	
High-Speed CMOS Logic Data Book - 1984	SCLD001A		11.75	
Telecommunications Circuits Data Book - 1986	SCTD001		9.95	
ALS/AS Logic Data Book (TTL Vol 3) - 1986	SDAD001B		12.95	
SN74AS888/890 Bit-Slice User's Guide (8-Bit) - 1985	SDBU001A		11.95	
SN74AS897 16-Bit Barrel Shifter User's Guide - 1985	SDBU003		8.35	
F Logic Data Book - 1987	SDFD001		11.95	
TTL Data Book Vol 2 (Std. TTL, S and LS)- 1985	SDL001		17.95	
Memory Management Applications Handbook - 1987	SDVA002		19.95	
LSI Logic Data Book - 1986	SDVD001		11.95	
Overview of IEEE Std 91 - 1984	SDYZ001		2.00	
TTL Data Book Vol 4 (FPLA, PAL, PROM and RAM) - 1986	SDZD001B		9.95	
Linear Circuits Applications - 1986	SLNA001		11.95	
Linear and Interface Circuits Applications Vol 1 - 1985	SLYA001		11.95	
Linear and Interface Circuits Applications Vol 2 - 1985	SLYA002		11.95	
Linear and Interface Circuits Applications Vol 3 - 1987	SLYA003		11.95	
Linear Circuits Data Book - 1984	SLYD001		14.95	
Interface Circuits Data Book - 1987	SLYD002		17.95	
Linear and Interface Circuits Applications w/Binder	SLYX001A		36.90	
MOS Memory Data Book - 1986	SMYD006		8.35	

**Customer Support**

BOOK TITLES	BOOK NO.	QUANTITY	UNIT PRICE	EXTENDED AMOUNT
TMS7000 Family Data Manual 8-Bit - 1986	SND001B		19.95	
Optoelectronics Data Book - 1987	SOYD002		11.50	
TMS7500/75C00 Data Encryption Device User's Guide - 1984	SPNU004		11.95	
TMS9914A GPIB Controller User's Guide - 1985	SPPU013		11.95	
TMS34061 User's Guide (Video System Controller) - 1986	SPPU014A		11.95	
TMS34070 User's Guide (Video Palette) - 1986	SPPU016A		9.95	
Color Graphic Controller Board User's Guide - 1986	SPPU019A		14.95	
Digital Signal Processing w/TMS320 - 1986	SPRA012A		34.95	
Theory and Implementation of a Splitband Modem - 1987	SPRA013		9.95	
TMS32010 Assembly Language Programmer's Guide - 1984	SPRU002B		19.95	
TMS320 1st Generation User's Guide - 1987	SPRU013		14.95	
TMS320 2nd Generation User's Guide - 1987	SPRU014		14.95	
TMS34010 Applications Guide - 1987	SPVA007		14.95	
TMS34010 User's Guide - 1987	SPVU001		24.95	
TMS34010 Software Development Board User's Guide - 1987	SPVU002A		19.95	
TMS34010 Software Development Board Schematics - 1987	SPVU003		4.95	
TMS34010 Assembly Language Tools User's Guide -1987	SPVU004		19.95	
TMS34010 C Compiler User's Guide - 1987	SPVU005		14.95	
TMS34010 Font Library User's Guide 1987	SPVU007		9.95	
TMS380 Adapter Chipset User's Guide - 1986	SPWU001D		19.95	
2- $\mu$ m CMOS Standard Cell Data Book - 1986	SRSD001		14.95	
How To Use Surface Mount Technology - 1984	SSYZ001		11.95	

ENTER TOTAL QUANTITY: \_\_\_\_\_ AMOUNT : \_\_\_\_\_

ADD SALES TAX : \_\_\_\_\_

ADD \$1.25 PER BOOK FOR SHIPPING AND HANDLING : \_\_\_\_\_

ENCLOSE CHECK OR MONEY ORDER FOR TOTAL : \_\_\_\_\_

# SEMICONDUCTOR BOOK ORDER FORM

Send check, money order or company purchase order to:

Ship to:

Texas Instruments Incorporated  
Data Book Marketing  
P.O. Box 117692  
Carrollton, TX 75011-7692

**Prepaid Orders:** must include sales tax\* and \$1.25 per book for shipping and handling.

**Purchase Order Terms:** \$100.00 minimum order, net 30 days, FOB Dallas, TX. Shipping and taxes\* will be added to invoice.

\* State and local taxes required from all states except AK, DE, MT and OR.

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_  
\_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone (\_\_\_\_\_) \_\_\_\_\_

BOOK TITLES	BOOK NO.	QUANTITY	UNIT PRICE	EXTENDED AMOUNT
Advanced CMOS Logic Designer's Handbook - 1987	SCAA001		\$ 11.95	\$
Advanced CMOS Logic Data Book - 1987	SCAD001		11.95	
TMS4500A Dynamic RAM Controller User's Guide - 1985	SCG690A		4.95	
High-Speed CMOS Logic Data Book - 1984	SCLD001A		11.75	
Telecommunications Circuits Data Book - 1986	SCTD001		9.95	
ALS/AS Logic Data Book (TTL Vol 3) - 1986	SDAD001B		12.95	
SN74AS888/890 Bit-Slice User's Guide (8-Bit) - 1985	SDBU001A		11.95	
SN74AS897 16-Bit Barrel Shifter User's Guide - 1985	SDBU003		8.35	
F Logic Data Book - 1987	SDFD001		11.95	
TTL Data Book Vol 2 (Std. TTL, S and LS)- 1985	SDLD001		17.95	
Memory Management Applications Handbook - 1987	SDVA002		19.95	
LSI Logic Data Book - 1986	SDVD001		11.95	
Overview of IEEE Std 91 - 1984	SDYZ001		2.00	
TTL Data Book Vol 4 (FPLA, PAL, PROM and RAM) - 1986	SDZD001B		9.95	
Linear Circuits Applications - 1986	SLNA001		11.95	
Linear and Interface Circuits Applications Vol 1 - 1985	SLYA001		11.95	
Linear and Interface Circuits Applications Vol 2 - 1985	SLYA002		11.95	
Linear and Interface Circuits Applications Vol 3 - 1987	SLYA003		11.95	
Linear Circuits Data Book - 1984	SLYD001		14.95	
Interface Circuits Data Book - 1987	SLYD002		17.95	
Linear and Interface Circuits Applications w/Binder	SLYX001A		36.90	
MOS Memory Data Book - 1986	SMYD006		8.35	

Customer Support

12

BOOK TITLES	BOOK NO.	QUANTITY	UNIT PRICE	EXTENDED AMOUNT
TMS7000 Family Data Manual 8-Bit - 1986	SND001B		19.95	
Optoelectronics Data Book - 1987	SOYD002		11.50	
TMS7500/75C00 Data Encryption Device User's Guide - 1984	SPNU004		11.95	
TMS9914A GPIB Controller User's Guide - 1985	SPPU013		11.95	
TMS34061 User's Guide (Video System Controller) - 1986	SPPU014A		11.95	
TMS34070 User's Guide (Video Palette) - 1986	SPPU016A		9.95	
Color Graphic Controller Board User's Guide - 1986	SPPU019A		14.95	
Digital Signal Processing w/TMS320 - 1986	SPRA012A		34.95	
Theory and Implementation of a Splitband Modem - 1987	SPRA013		9.95	
TMS32010 Assembly Language Programmer's Guide - 1984	SPRU002B		19.95	
TMS320 1st Generation User's Guide - 1987	SPRU013		14.95	
TMS320 2nd Generation User's Guide - 1987	SPRU014		14.95	
TMS34010 Applications Guide - 1987	SPVA007		14.95	
TMS34010 User's Guide - 1987	SPVU001		24.95	
TMS34010 Software Development Board User's Guide - 1987	SPVU002A		19.95	
TMS34010 Software Development Board Schematics - 1987	SPVU003		4.95	
TMS34010 Assembly Language Tools User's Guide -1987	SPVU004		19.95	
TMS34010 C Compiler User's Guide - 1987	SPVU005		14.95	
TMS34010 Font Library User's Guide 1987	SPVU007		9.95	
TMS380 Adapter Chipset User's Guide - 1986	SPWU001D		19.95	
2- $\mu$ m CMOS Standard Cell Data Book - 1986	SRS001		14.95	
How To Use Surface Mount Technology - 1984	SSYZ001		11.95	

ENTER TOTAL QUANTITY: \_\_\_\_\_ AMOUNT : \_\_\_\_\_

ADD SALES TAX : \_\_\_\_\_

ADD \$1.25 PER BOOK FOR SHIPPING AND HANDLING : \_\_\_\_\_

ENCLOSE CHECK OR MONEY ORDER FOR TOTAL : \_\_\_\_\_

## TI SC Europe Sales Offices

### BELGIQUE/BELGIE

**S.A. Texas Instruments Belgium N.V.**  
11, Avenue Jules Bordetlaan 11,  
1140 Bruxelles/Brussel  
Tel: (02) 242 30 80  
Telex: 61161 TEXBEL

### DANMARK

**Texas Instruments A/S**  
Marielundvej 46E  
2730 Herlev  
Tel: 02 91 74 00  
Telefax: 02 91 84 00  
Telex: 35123 TEXIN

### DEUTSCHLAND

**Texas Instruments  
Deutschland GmbH.**  
Haggertystraße 1  
8050 Freising  
Tel: 0 81 61/80-0 od. Nbst  
Telex: 5 26 529 texin d  
Btx: \*280505\*

Kurfürstendamm 195-196  
1000 Berlin 15  
Tel: 030/8 82 73 65  
Telex: 5 26 529 texin d

Dusseldorfer Straße 40  
6236 Eschborn 1  
Tel: 06196/80 70  
Telex: 5 26 529 texin d

III. Hagen 43/Kibbelstraße 19  
4300 Essen 1  
Tel: 0201/24 25-0  
Telex 5 26 529 texin d

Kirchhorster Straße 2  
3000 Hannover 51  
Tel: 0511/64 80 21  
Telex: 5 26 529 texin d

Maybachstraße II  
7302 Ostfildern 2 (Nellingen)  
Tel. 0711/34 03-0  
Telex 5 26 529 texin d

### EIRE

**Texas Instruments Ireland Ltd**  
7/8 Harcourt Street  
Dublin 2  
Tel: (01) 78 16 77  
Telex: 32626

### ESPAÑA

**Texas Instruments España S.A.**  
C/ José Lázaro Galdiano No. 6  
28036 Madrid  
Tel: (1) 458 14 58  
Telex: 23634  
Fax: (1) 457 94 04  
C/Diputacion, 279-3-5  
08007 Barcelona  
Tel: (3) 317 91 80  
Telex: 50436  
Fax: (3) 301 84 61

### FRANCE

**Texas Instruments France**  
8-10 Avenue Morane Saulnier - B.P. 67  
78141 Vélizy Villacoublay cedex  
Tel: Standard : (1) 30 70 10 03  
Service Technique : (1) 30 70 10 05  
Telex: 698707 F

### HOLLAND

**Texas Instruments Holland B.V.**  
Hogehilweg 19  
Postbus 12995  
1100 AZ Amsterdam-Zuidoost  
Tel: (020) 5602911  
Telex: 12196

### ITALIA

**Texas Instruments Italia S.p.A.**  
Divisione Semiconduttori  
Viale Europa, 40  
20093 Cologno Monzese (Milano)  
Tel: (02) 25300 1  
Telex: 332633 MITEX I

Via Castello della Magliana, 38  
00148 Roma  
Tel. (06) 5222651  
Telex 610587 ROTEX I

Corso Svizzera, 185  
10100 Torino  
Tel. (011) 774545

Via Amendola, 17  
40100 Bologna  
Tel. (051) 554004

### NORGE

**Texas Instruments Norge A/S**  
PB 106  
Refstad (Sinsenveien 53)  
0585 Oslo 5  
Tel: (02) 155090

### ÖSTERREICH

**Texas Instruments Ges.m.b.H.**  
Hietzinger Kai 101-105  
A-1130 Wien  
Tel: 0222/9100-0  
Telex: 136 796

### PORTUGAL

**Texas Instruments Equipamento  
Electronico (Portugal) LDA.**  
R. Eng. Frederico Ulrich, 2650  
Moreira Da Maia  
4470 Maia  
Tel: (2) 948 1003  
Telex: 22485

### SCHWEIZ/SUISSE

**Texas Instruments Switzerland AG**  
Riedstraße 6  
CH-8953 Dietikon  
Tel: (01) 740 22 20  
Telex: 825 260 TEXIN

### SUOMI FINLAND

**Texas Instruments OY**  
Ahertanjantie 3  
P.O. Box 81,  
0201 Espoo  
Tel: (09) 0461-422  
Telex: 121457

### SVERIGE

**Texas Instruments  
International Trade Corporation**  
(Sverigeaffilialen)  
Isafjordsgatan 7  
Box 30

S-163 93 Spånga  
Tel: (08) 793 91 70  
Telefax: (08) 751 97 15  
Telex: 10377 SVENTEX S

### UNITED KINGDOM

**Texas Instruments Ltd.**  
Manton Lane,  
Bedford,  
England, MK41 7PA  
Tel: (0234) 270 111  
Telex: 82178

**Technical Enquiry Service**  
Tel: (0234) 223000



# TEXAS INSTRUMENTS

## TI SC Europe Regional Technology Centres

### DEUTSCHLAND

**Texas Instruments  
Deutschland GmbH.**  
Haggertystraße 1  
8050 Freising  
Tel: (08161) 80 40 43

Frankfurt/Main  
Dusseldorfer Straße 40  
6236 Eschborn  
Tel: (0 61 96) 80 74 18

Kirchhorster Straße 2  
3000 Hannover 51  
Tel: (0511) 64 80 21

Maybachstraße 11  
7302 Ostfildern 2 (Nellingen)  
Stuttgart  
Tel: (0711) 34 03-0

### FRANCE

#### Centre de Technologie

**Texas Instruments France**  
8-10 Avenue Morane Saulnier, B.P. 67  
78141 Vélizy Villacoublay cedex  
Tel: Standard : (1) 30 70 10 03  
Service Technique : (1) 30 70 10 05  
Telex: 698707 F

### Texas Instruments France

B. P. 5  
06270 Villeneuve-Loubet  
Tel: 93 22 20 01  
Telex: 470127 F

### HOLLAND

#### Texas Instruments Holland B.V.

Hogehilweg 19  
Postbus 12995  
1100 AZ Amsterdam-Zuidoost  
Tel: (020) 5602911  
Telex: 12196

### ITALIA

#### Texas Instruments Italia S.p.A.

Divisione Semiconduttori  
Viale Europa, 40  
20093 Cologno Monzese (Milano)  
Tel: (02) 25300 1  
Telex: 332633 MITEX I

### SVERIGE

#### Texas Instruments

#### International Trade Corporation

(Sverigeaffilialen)  
Isafjordsgatan 7  
Box 30  
S-163 93 Spånga  
Tel: (08) 793 91 70  
Telefax: (08) 751 97 15  
Telex: 10377 SVENTEX

### UNITED KINGDOM

#### Texas Instruments Ltd.

#### Regional Technology Centre

Manton Lane,  
Bedford,  
England, MK41 7PA  
Tel: (0234) 270 111  
Telex: 82178

#### Technical Enquiry Service

Tel: (0234) 223000



## Asia Pacific Division

### APD Sales Offices

#### AUSTRALIA

Texas Instruments Australia Limited  
6-10 Talavera Road  
North Ryde, NSW  
Sydney, Australia 2113  
TEL: 011+61+2+887-1122  
FAX: 011+61+2+888-3415  
TLX: AA25685

Texas Instruments Australia Limited  
418 St. Kilda Road  
Melbourne, VIC 3004  
Australia  
TEL: 011+61+03+267-4677  
FAX: 011+61+03+267-6381  
TLX: AA36410

#### HONG KONG

Texas Instruments Asia Ltd.  
8/F, World Shipping Centre  
Harbour City, 7 Canton Rd.  
Kowloon, Hong Kong  
TEL: 011+852+3+722-1223  
FAX: 011+852+3+724-4954  
TLX: 43809 ASIAT HX

#### PHILIPPINES

Texas Instruments Asia Ltd.  
14th/F, BA-Lepanto Bldg.  
8747 Paseo De Roxas  
Makati, Metro Manila,  
Philippines  
TEL: 011+63+2+817-6031  
TLX: 45337 ASIAT PM

#### SINGAPORE

Texas Instruments Singapore (PTE) LTD.  
Asia Pacific Division  
101 Thomson Rd. #23-01  
Goldhill Square  
Singapore 1130  
TEL: 011+65+251-9818  
FAX: 011+65+253-6655  
TLX: RS36871

#### SOUTH KOREA

Texas Instruments Supply Co.  
3/F, Saman Building  
678-39, Yuksam-Dong,  
Gangnam-Ku,  
Seoul, Korea 135  
TEL: 011+82+2+556-8661  
FAX: 011+82+2+555-6158  
TLX: TIKOR K29212

#### TAIWAN

Texas Instruments Supply Co.  
903, 9/F, Bank Tower  
205, Tung Hua N. Road  
Taipei, Taiwan R.O.C.  
TEL: 011+886+2+713-9311  
FAX: 011+886+2+716-9487  
TLX: 24903 TISCOTAI

## APD Regional Technology Centers

#### AUSTRALIA

Texas Instruments Australia Limited  
6-10 Talavera Road  
North Ryde, NSW  
Sydney, Australia 2113  
TEL: 011+61+2+887-1122  
FAX: 011+61+2+888-3415  
TLX: AA25685

Texas Instruments Australia Limited  
418 St. Kilda Road  
Melbourne, VIC 3004  
Australia  
TEL: 011+61+03+267-4677  
FAX: 011+61+03+267-6381  
TLX: AA36410

#### HONG KONG

Texas Instruments Asia Ltd.  
8/F, World Shipping Centre  
Harbour City, 7 Canton Rd.  
Kowloon, Hong Kong  
TEL: 011+852+3+722-1223  
FAX: 011+852+3+724-4954  
TLX: 43809 ASIAT HX

#### SINGAPORE

Texas Instruments Singapore (PTE) Ltd.  
Asia Pacific Division  
101 Thomson Rd. #23-01  
Goldhill Square  
Singapore 1130  
TEL: 011+65+251-9818  
FAX: 011+65+253-6655  
TLX: RS36871

#### SOUTH KOREA

Texas Instruments Supply Co.  
3/F, Saman Building  
678-39, Yuksam-Dong,  
Gangnam-Ku,  
Seoul, Korea 135  
TEL: 011+82+2+556-8661  
FAX: 011+82+2+555-6158  
TLX: TIKOR K29212

#### TAIWAN

Texas Instruments Supply Co.  
903, 9/F, Bank Tower  
205, Tung Hua N. Road  
Taipei, Taiwan R.O.C.  
TEL: 011+886+2+713-9311  
FAX: 011+886+2+716-9487  
TLX: 24903 TISCOTAI

## APD Distributors

#### AUSTRALIA

ACD/Itronics PTY Limited  
106 Belmore Road  
North Riverwood, NSW 2210  
TEL: (02) 534 6200  
FAX: (02) 534 4910  
TLX: AA121398

#### VSI Electronics (AUST) PTY Limited

16 Dickson Avenue  
Artarmon, NSW 2064

#### VSI Electronics (N.Z.) Limited

7 Beasley Avenue  
Penrose, Auckland  
New Zealand  
TEL: (649) 59 6603  
FAX: (649) 59 3694  
TLX: NZX60340

#### RIFA PTY Limited

202 Bell Street  
Preston, VIC 3072  
TEL: (03) 480 1211  
FAX: (03) 484 6345  
TLX: AA31001

#### Electronic Components & Equipment PTY Ltd.

30-40 Hurtle Square  
Adelaide, S.A. 5000  
TEL: (08) 232 0001  
FAX: (08) 232 0670  
TLX: AA89417

#### HONG KONG

ATEK Electronics Co. Ltd.  
RM 1301, 1302, 1309, Argyle Centre  
Phase 1  
688 Nathan Road  
Kowloon, Hong Kong  
TEL: 3-916833-4, 3-953165-0  
FAX: 3-7779603  
TLX: 37119 ATEK HX

#### Electrocon Products Ltd

5th Floor, Perfect Commercial Building  
20 Austin Avenue  
Kowloon, Hong Kong  
TEL: 3-687214, 3-7392023  
FAX: 3-7220869  
TLX: 39916 EPLET HX

#### INDIA

#### Zenith Electronics PVT Ltd.

A to Z Industrial Estate  
A-3 Annex Building, 3rd Floor  
Ganpatrao Kadam Marg,  
Lower Parel  
Bombay 400-013  
India  
TEL: 91-22-4946027, 4941677  
TLX: 1173772 ZNTH, IN

#### PHILIPPINES

#### DEE HWA Liang Elect. Equipment Corp. (DEECO)

607 Sales St., Quiapo, Manila  
TEL: 011+63+2+401651/408859/475725/  
408134

TLX: 27691 DEEHP

#### R & I Electronics

1157 Quezon Avenue  
Quezon City  
TEL: 011+63+2+983344/985778

#### SINGAPORE

#### Transco Electronics PTE Ltd.

10 Jalan Besar  
Sim Lim Tower, #02-01 & 02-02  
Singapore 0820  
TEL: 011+65+294-7127  
FAX: 011+65+296-7435  
TLX: RS34550 TE

#### SOUTH KOREA

#### Tong Baek Trading Co. Ltd.

New Hanil Building, 2nd Floor  
156-1, Yeomri-Dong, Mapo-Ku  
Seoul, Korea  
TEL: 2-7166625, 2-7190817  
FAX: 2-7190818  
TLX: K28569 TBTRACO

#### TAIWAN

#### Sertek International Co. Ltd.

13F, No. 135 Sec. 2  
Chien Kuo North Road  
Taipei, Taiwan  
R.O.C.  
TEL: 2-5010055  
FAX: 2-5058414  
TLX: 23756 SERTEK

#### World Peace Industrial Co. Ltd.

5F, No. 309 Sung Chiang Road  
Taipei, Taiwan  
TEL: 2-505-6345  
FAX: 2-501-6026  
TLX: 14030 WPINDCO

#### THAILAND

#### Choakchai Electronic Supplies L.P.

128/22 Thanon Atsadang  
Bangkok 2  
Thailand  
TEL: 66-2-221043, 2215384, 2223921, 2227001  
FAX: 66-2-2247639  
TLX: 84809 CESLP TH



# TEXAS INSTRUMENTS

## Latin America Division

### LAD Sales Offices

**Texas Instrumentes Argentina**  
Viamonte 1119  
1053 Capital Federal  
Buenos Aires, Argentina  
Tel: 541/748-3699

**Texas Instrumentes Electronicos  
Do Brasil LTDA**  
Rua Azarias de Melo, 648/660  
Caixa Postal 988/86  
13.090 Campinas, SP, Brasil  
Tel: 55/192/51-8144

**Texas Instruments de Mexico**  
Alfonso Reyes -115  
Col. Hipodromo Condesa  
06120 Mexico, D.F., Mexico  
Tel: 525/525-3860

### LAD Distributors

**ARGENTINA  
ELECTROCOMPONENTES**  
Solis 227  
1078 Buenos Aires  
Argentina  
Tel: 45-1864

**TECNOS**  
Av. Independencia 1861  
1225 Buenos Aires  
Argentina  
Tel: 37-3793

**DESAC**  
Santa Rosa 3803 — Florida  
1602 Buenos Aires  
Argentina  
Tel: 760-5749

**UNION T.V.**  
Lavalle 350  
5500 Mendoza  
Argentina  
Tel: (061)252231

**RAMBLERT**  
Santa Rosa 53/55  
5000 Cordoba  
Argentina  
Tel: (051)27361

**G.B. INGENIERIA ELECTRONICA**  
Mitre 1173 — Rosario  
2000 Santa Fe  
Argentina  
Tel: (041)45890

**MENDEZ COLLADO**  
Av. Corrientes 3500  
1194 Buenos Aires  
Argentina  
Tel: 88-1152

**ENEKA ARGENTINA**  
Tucuman 299  
1049 Buenos Aires  
Argentina  
Tel: 311-3363

**RODAR SEMICONDUCTORES**  
Parana 789  
1017 Buenos Aires  
Argentina  
Tel: 45-6063

**BRAZIL  
ALFATRONIC S/A**  
Av. Reboucas, 1028  
05402 — Sao Paulo — SP  
Brazil  
Tel: (011) 852-8277

**INTERTEK COMPONENTES  
ELECTRONICOS LTDA**  
R. Miguel Casagrande, 200  
02714 — Sao Paulo — SP  
Brazil  
Tel: (011) 266-2922

**L.F. INDUSTRIA E COMERCIO DE  
COMPONENTES ELETRONICOS LTDA**  
Av. Ipiranga, 1100 — 8. Andar  
01040 — Sao Paulo — SP  
Brazil  
Tel: (011) 229-9644

**PANAMERICANA COMERCIAL  
IMPORTADORA LTDA**  
Rua Aurora, 263  
02714 — Sao Paulo — SP  
Brazil  
Tel: (011) 222-2311

**TELEIMPORT ELETRONICA LTDA**  
Rua Santa Ifigenia, 402 — 10. Andar  
01207 — Sao Paulo — SP  
Brazil  
Tel: (011) 222-2122

**TELERADIO ELETRONICA LTDA**  
Rua Sena Madureira, 42  
04021 — Sao Paulo — SP  
Brazil  
Tel: (011) 544-1722

**TITRONIX ELETRONICA LTDA**  
R. Dr. Eurico Rangel, 40  
04602 — Sao Paulo — SP  
Brazil  
Tel: (011) 543-4766

**CHILE  
VICTRONICS Limitada**  
Mac-Iver 225 Oficina 301  
Santiago de Chile  
Tel: 562/330237

**COLOMBIA  
TEKCIEN Electronica**  
Apartado Aereo 4507  
CRA. 25, No. 40-96  
Bogota, Colombia  
Tel: 571/2417-940

**COSTA RICA  
Electro Mundo Intl. S.A.**  
Apdo. Postal 1824-1000  
Av. 4, Calles 6 y 8  
San Jose, Costa Rica  
Tel: 506/57-0222

**ECUADOR  
DIMATRONIC**  
P.O. Box 3373  
Junin 703 y Boyaca  
Guayaquil, Ecuador  
Tel: 593-4-301863

**DIMATRONIC  
(Div. MANTENIMIENTO ELECTRONICO)**  
Plaza 414 y Roca  
Quito, Ecuador  
Tel: 524-284

**MEXICO  
DICOPEL, S.A. DE C.V.**  
Tochli # 368  
Fracc. Ind. San Antonio Azcapotzalco  
02760 Mexico, D.F., Mexico  
Tel: 561-32-11

**GRUPO DISTELE, S.A.**  
Obrero Mundial # 736,  
Col. Alamos  
03400 Mexico, D.F., Mexico  
Tel: 538-05-00 AL 04

**ELECTRONICA, COMPONENTES Y  
MODULOS, S.A.**  
Ave. Universidad # 626,  
Col. Vertiz Narvarte  
03600 Mexico, D.F., Mexico  
Tel: 575-84-65

**ELECTRONICA SETA, S.A. DE C.V.**  
Ings. Militares # 35 — 101  
Naucalpan de Juarez, E.M., Mexico  
Tel: 358-39-38 / 358-51-98 / 358-73-65

**PARAGUAY  
Micro Sistemas S.R.L.**  
Tte. Farina 1126 Casi Brasil  
Asuncion, Paraguay  
Tel: 59/521-208284

**URUGUAY  
Eneka S.A. Division Electronica**  
Av. Gral. Rondeau 1534  
P.O. Box 695  
Montevideo, Uruguay  
Tel: 598/907-944

**VENEZUELA  
Logibyte de Venezuela**  
Apdo. Los Chaguaramos 47776  
Av. Ciudad Universitaria  
Edif. Los Moriches  
Caracas 1041-A, Venezuela  
Tel: 582/662-1980

**Pedro Benavides**  
Avilanes a Rio  
Residencia Kamarata Local 4  
Apdo. Postal 20249  
Caracas 1020-A, Venezuela  
Tel: 582/572-4908



## TI Japan Regional Technology Centers

### NAGOYA

Daini Toyota Bld. West-Wing 7F  
4-10-27 Meieki Nakanura-Ku,  
Nagoya-City, 450 Japan  
TEL: 052-583-8691  
FAX: 052-583-8696

### OSAKA

Nissho Iwai Bld. 5F  
3-30 Imabahi Higashi-Ku,  
Osaka-City, 541 Japan  
TEL: 06-204-1881  
FAX: 06-204-1895

## TI Japan Sales Offices

### KANAZAWA

Kanazawa Oyamacho Daiichi  
Life Insurance Bld. 6F  
3-10 Oyamacho, Kanazawa-City, 920 Japan  
TEL: 0762-23-5471  
FAX: 0762-23-1583

### KYUSHU

2597-1 Harudai, Yasaka,  
Kitsuki-City,  
Oita, 873 Japan  
TEL: 09876-3-3211  
FAX: 09876-3-1295

### MATSUMOTO

Matsumoto Showa Bld. 6F  
1-2-11 Fukashi,  
Matsumoto-City, 390 Japan  
TEL: 0263-33-1060  
FAX: 0263-33-1025

### MIHO

2350 Kihara, Miho-Mura,  
Inashiki-Gun,  
Ibaraki, 300-04 Japan  
TEL: 0298-85-2541  
FAX: 0298-85-0209

### NAGOYA

Daini Toyota Bld. West-Wing 7F  
4-10-27 Meieki Nakanura-Ku,  
Nagoya-City, 450 Japan  
TEL: 052-583-8691  
FAX: 052-583-8696

### OSAKA

Nissho Iwai Bld. 5F  
3-30 Imabahi Higashi-Ku,  
Osaka-City, 541 Japan  
TEL: 06-204-1881  
FAX: 06-204-1895

### TACHIKAWA

Daiich Olympic Bld. 6F  
1-25-12 Akebonocho,  
Tachikawa-City, 190 Japan  
TEL: 0425-27-6760  
FAX: 0425-27-6426

### YOKOHAMA

Yokohama Nishiguchi Kn BLD. 6F  
2-8-4 Kitasaiwai, Nishi-Ku,  
Yokohama-City, 220 Japan  
TEL: 045-322-6741  
FAX: 045-322-6746



# TEXAS INSTRUMENTS

# TI Sales Offices

**ALABAMA:** Huntsville (205) 837-7530.  
**ARIZONA:** Phoenix (602) 995-1007; Tucson (602) 624-3276.  
**CALIFORNIA:** Irvine (714) 660-8187; Sacramento (916) 923-0152; San Diego (619) 278-9601; Santa Clara (408) 980-9000; Torrance (213) 217-7010; Woodland Hills (818) 704-7759.  
**COLORADO:** Aurora (303) 368-8000.  
**CONNECTICUT:** Wallingford (203) 269-0074.  
**FLORIDA:** Ft. Lauderdale (305) 973-8502; Altamonte Springs (305) 260-2116; Tampa (813) 870-6420.  
**GEORGIA:** Norcross (404) 662-7900.  
**ILLINOIS:** Arlington Heights (312) 640-2925.  
**INDIANA:** Ft. Wayne (219) 424-5174; Carmel (317) 573-8400.  
**IOWA:** Cedar Rapids (319) 395-9550.  
**MARYLAND:** Baltimore (301) 944-8600.  
**MASSACHUSETTS:** Waltham (617) 895-9100.  
**MICHIGAN:** Farmington Hills (313) 553-1500; Grand Rapids (616) 957-4200.  
**MINNESOTA:** Eden Prairie (612) 828-9300.  
**MISSOURI:** Kansas City (816) 523-2500; St. Louis (314) 569-7600.  
**NEW JERSEY:** Iselin (201) 750-1050.  
**NEW MEXICO:** Albuquerque (505) 345-2555.  
**NEW YORK:** East Syracuse (315) 463-9291; Mayville (516) 454-5600; Pittsford (716) 385-6770; Poughkeepsie (914) 473-2300.  
**NORTH CAROLINA:** Charlotte (704) 527-0390; Raleigh (919) 876-2725.  
**OHIO:** Beachwood (216) 464-6100; Dayton (513) 258-3677.  
**OREGON:** Beaverton (503) 643-6758.  
**PENNSYLVANIA:** Blue Bell (215) 825-9500.  
**PUERTO RICO:** Hato Rey (809) 753-8700.  
**TENNESSEE:** Johnson City (615) 461-2192.  
**TEXAS:** Austin (512) 250-7655; Houston (713) 778-6592; Richardson (214) 680-5082; San Antonio (512) 496-1779.  
**UTAH:** Murray (801) 266-8972.  
**VIRGINIA:** Fairfax (703) 849-1400.  
**WASHINGTON:** Redmond (206) 881-3080.  
**WISCONSIN:** Brookfield (414) 785-7140.  
**CANADA:** Nepean, Ontario (613) 726-1970; Richmond Hill, Ontario (416) 884-9181; St. Laurent, Quebec (514) 336-1860.

# TI Regional Technology Centers

**CALIFORNIA:** Irvine (714) 660-8140; Santa Clara (408) 748-2220.  
**GEORGIA:** Norcross (404) 662-7945.  
**ILLINOIS:** Arlington Heights (312) 640-2909.  
**MASSACHUSETTS:** Waltham (617) 895-9197.  
**TEXAS:** Richardson (214) 680-5066.  
**CANADA:** Nepean, Ontario (613) 726-1970

# Customer Response Center

TOLL FREE: (800) 232-3200  
 OUTSIDE USA: (214) 995-6611  
 (8:00 a.m. — 5:00 p.m. CST)

# TI Distributors

**TI AUTHORIZED DISTRIBUTORS**  
**Arrow Electronics (U.S. and Canada)**  
**Future Electronics (Canada)**  
**General Radio Supply Company**  
**Hall-Mark Electronics**  
**Kierulff Electronics**  
**Marshall Industries**  
**Newark Electronics**  
**Schweber Electronics**  
**Time Electronics**  
**Wyle Laboratories**  
**Zeus Components**

**—OBSOLETE PRODUCT ONLY—**  
**Rochester Electronics, Inc.**  
**Newburyport, Massachusetts**  
**(617) 462-9332**

**ALABAMA:** Arrow (205) 837-8955; Hall-Mark (205) 837-8700; Kierulff (205) 883-6070; Marshall (205) 881-9235; Schweber (205) 895-0480.  
**ARIZONA:** Arrow (602) 968-4800; Hall-Mark (602) 437-1200; Kierulff (602) 437-0750; Marshall (602) 968-6181; Schweber (602) 997-4874; Wyle (602) 968-9588.  
**CALIFORNIA: Los Angeles/Orange County:** Arrow (818) 701-7500; (714) 835-5422; Hall-Mark (818) 716-7300; (714) 669-4700; (213) 217-8400; Kierulff (213) 725-0325, (714) 731-5711, (714) 220-6300; (818) 407-2500; Marshall (818) 407-0101, (818) 459-5500, (714) 458-5395; Schweber (818) 999-4702; (714) 863-0200; (213) 327-8409; Wyle (213) 322-9953; (818) 880-9000; (714) 863-9953; Zeus (714) 921-9000; Sacramento: Hall-Mark (916) 722-8600; Marshall (916) 635-9700; Schweber (916) 929-9732; Wyle (916) 638-5282; San Diego: Arrow (619) 565-4800; Hall-Mark (619) 268-1201; Kierulff (619) 278-2112; Marshall (619) 578-9600; Schweber (619) 450-0454; Wyle (619) 565-9171; San Francisco Bay Area: Arrow (408) 745-6600; (415) 487-4600; Hall-Mark (408) 432-0900; Kierulff (408) 971-2600; Marshall (408) 942-4600; Schweber (408) 432-7171; Wyle (408) 727-2500; Zeus (408) 998-5121.  
**COLORADO:** Arrow (303) 696-1111; Hall-Mark (303) 790-1652; Kierulff (303) 790-4444; Marshall (303) 451-5444; Schweber (303) 799-0258; Wyle (303) 457-9953.  
**CONNECTICUT:** Arrow (203) 265-7741; Hall-Mark (203) 269-0100; Kierulff (203) 265-1115; Marshall (203) 265-3822; Schweber (203) 748-7080.  
**FLORIDA:** Ft. Lauderdale: Arrow (305) 429-8200; Hall-Mark (305) 971-9280; Kierulff (305) 486-4004; Marshall (305) 977-4880; Schweber (305) 977-7511; Orlando: Arrow (305) 725-1480; Hall-Mark (305) 855-4020; Kierulff (305) 682-6923; Marshall (305) 841-1878; Schweber (305) 331-7555; Zeus (305) 365-3000; Tampa: Hall-Mark (813) 530-4543; Marshall (813) 576-1399.  
**GEORGIA:** Arrow (404) 449-8252; Hall-Mark (404) 447-8000; Kierulff (404) 447-5252; Marshall (404) 923-5750; Schweber (404) 449-9170.  
**ILLINOIS:** Arrow (312) 397-3440; Hall-Mark (312) 860-3800; Kierulff (312) 250-0500; Marshall (312) 490-0155; Newark (312) 784-5100; Schweber (312) 364-3750.  
**INDIANA:** Indianapolis: Arrow (317) 243-9353; Hall-Mark (317) 872-8875; Marshall (317) 297-0483.  
**IOWA:** Arrow (319) 395-7230; Schweber (319) 373-1417.

**KANSAS:** Kansas City: Arrow (913) 541-9542; Hall-Mark (913) 888-8577; Marshall (913) 492-3121; Schweber (913) 492-2961.  
**MARYLAND:** Arrow (301) 995-0003; Hall-Mark (301) 988-9800; Kierulff (301) 840-1155; Marshall (301) 840-9450; Schweber (301) 840-5900; Zeus (301) 997-1118.  
**MASSACHUSETTS:** Arrow (617) 933-8130; Hall-Mark (617) 667-0902; Kierulff (617) 667-8313; Marshall (617) 658-0810; Schweber (617) 275-5100, (617) 657-0760; Time (617) 532-6200; Zeus (617) 863-8800.  
**MICHIGAN: Detroit:** Arrow (313) 971-8220; Marshall (313) 525-5850; Newark (313) 967-0600; Schweber (313) 525-8100; Grand Rapids: Arrow (616) 243-0912.  
**MINNESOTA:** Arrow (612) 830-1800; Hall-Mark (612) 941-2600; Kierulff (612) 941-7500; Marshall (612) 559-2211; Schweber (612) 941-5280.  
**MISSOURI: St. Louis:** Arrow (314) 567-8888; Hall-Mark (314) 291-5350; Kierulff (314) 997-4956; Schweber (314) 739-0526.  
**NEW HAMPSHIRE:** Arrow (603) 668-8968; Schweber (603) 625-2250.  
**NEW JERSEY:** Arrow (201) 575-5300; (609) 596-8000; General Radio (609) 964-8560; Hall-Mark (201) 575-4415; (609) 235-1900; Kierulff (201) 575-6750; (609) 235-1444; Marshall (201) 882-0320; (609) 234-9100; Schweber (201) 227-7880.  
**NEW MEXICO:** Arrow (505) 243-4566.  
**NEW YORK: Long Island:** Arrow (516) 231-1000; Hall-Mark (516) 737-0600; Marshall (516) 273-2053; Schweber (516) 334-7555; Zeus (914) 937-7400. Rochester: Arrow (716) 427-0300; Hall-Mark (716) 244-9200; Marshall (716) 235-7620; Schweber (716) 424-2222; Syracuse: Marshall (607) 798-1611.  
**NORTH CAROLINA:** Arrow (919) 876-3132; (919) 725-8711; Hall-Mark (919) 872-0712; Kierulff (919) 872-8240; Marshall (919) 878-9882; Schweber (919) 876-0000.  
**OHIO: Cleveland:** Arrow (216) 248-3990; Hall-Mark (216) 349-4532; Kierulff (216) 831-5222; Marshall (216) 248-7788; Schweber (216) 464-2970. Columbus: Arrow (614) 885-8362; Hall-Mark (614) 888-3313; Dayton: Arrow (513) 435-5563; Kierulff (513) 439-0045; Marshall (513) 236-8088; Schweber (513) 439-1800.  
**OKLAHOMA:** Arrow (918) 665-7700; Kierulff (918) 252-7537; Schweber (918) 622-8000.  
**OREGON:** Arrow (503) 684-1690; Kierulff (503) 641-9153; Wyle (503) 640-6000; Marshall (503) 644-5050.  
**PENNSYLVANIA:** Arrow (412) 856-7000; (215) 928-1800; General Radio (215) 922-7037; Schweber (215) 441-0600; (412) 762-1600.  
**TEXAS: Austin:** Arrow (512) 835-4180; Hall-Mark (512) 258-8848; Kierulff (512) 835-2090; Marshall (512) 837-1991; Schweber (512) 458-8253; Wyle (512) 834-9957. Dallas: Arrow (214) 380-5464; Hall-Mark (214) 553-4300; Kierulff (214) 840-0110; Marshall (214) 233-5200; Schweber (214) 661-5010; Wyle (214) 235-9953; Zeus (214) 783-7010. Houston: Arrow (713) 530-4700; Hall-Mark (713) 791-5100; Kierulff (713) 530-7030; Marshall (713) 895-9200; Schweber (713) 784-3600; Wyle (713) 879-9953.  
**UTAH:** Arrow (801) 972-0404; Hall-Mark (801) 972-1008; Kierulff (801) 973-6913; Marshall (801) 485-1551; Wyle (801) 974-9953.  
**WASHINGTON:** Arrow (206) 643-4800; Kierulff (206) 575-4420; Wyle (206) 453-8300; Marshall (206) 747-9100.  
**WISCONSIN:** Arrow (414) 792-0150; Hall-Mark (414) 797-7844; Kierulff (414) 784-8160; Marshall (414) 797-8400; Schweber (414) 784-9020.  
**CANADA: Calgary:** Future (403) 235-5325; Edmonton: Future (403) 438-2858; Montreal: Arrow Canada (514) 735-5511; Future (514) 694-7710; Ottawa: Arrow Canada (613) 226-6903; Future (613) 820-8313; Quebec City: Arrow Canada (418) 687-4231; Toronto: Arrow Canada (416) 672-7769; Future (416) 638-4771; Vancouver: Future (604) 294-1166; Winnipeg: Future (204) 339-0554.



# TEXAS INSTRUMENTS



